

R4ZRE20

4" Universal Remodel Recessed Downlight with Megaman BR20/PAR20 E26 Base LED Lamp

Specifications/Features

Housing/Mounting

May be used in all types of ceiling construction.
Retractable mounting clips allow for easy installation into existing ceiling. Clips sit inside lamp housing and hold firmly to back of dry wall.
Requires 3" minimum clearance in insulated ceilings.
Will work in ceiling thickness from 3/8" to 5/8".
Ceiling template provided.
Input Voltage: 120V AC, 60Hz.
Thermally protected.
Maximum of (8) No. 12 AWG conductors.
Junction Box has (7) 1/2" pry-outs and (4) Romex pry-outs.
Adjustable lamp socket, vertical position.
Quick connect, push-in wire connectors included.

Dimming

Dimmable to 10% with forward phase/TRIAC dimming. For optimal performance, use forward phase/TRIAC dimmer specifically designed for LED lamps. Dimming performance may vary due to field conditions, including but not limited to, power quality, installation and wiring, and variations in dimmer production. Please reference the dimmer manufacturer's instructions for dimmer installation and further information.

Trims

Many different trims options are available to complement any design style.

Warranty

This fixture is covered by ConTech's full three (3) year replacement guarantee after date of purchase.


Listing

cCSAus Certified. Suitable for damp locations.
BR20 and 30-degree PAR20 lamps are Energy Star listed as noted.

Light Output/Performance

Megaman LED lamp designed to last 25,000 hours
Correlated Color Temperature of 2700K, 3000K, or 3500K; Color Rendering Index of 82
Correlated Color Temperature of 4000K, Color Rendering Index of 85
RoHS compliant, contains no lead or mercury.

Lamp Type	Lumens	CBCP	Base	CCT	W	LPW
BR20	600		E26	2700K, 3000K 3500K, 4000K	9.5W	63LpW
PAR20 30 Degree	600	900	E26	2700K, 3000K 3500K, 4000K	7W	86LpW
PAR20 15 Degree	650	5500	E26	2700K, 3000K 3500K, 4000K	10W	65LpW
PAR20 35 Degree	900	1800	E26	2700K, 3000K 3500K, 4000K	10W	90LpW

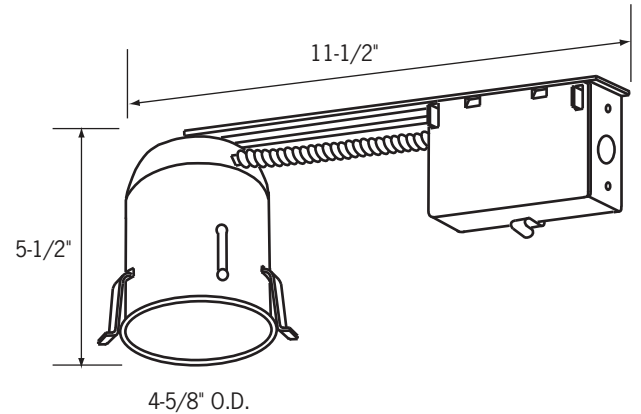

Ceiling Opening: 4-3/8"



BR20



PAR20
30-Degree



PAR20
15-Degree




PAR20
35-Degree

R4ZRE20

4" Universal Remodel Recessed Downlight with Megaman BR20/PAR20 E26 Base LED Lamp


Trims

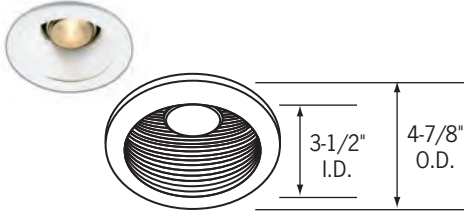

CTR2001-P
Black Baffled Downlight


CTR2001W-P
White Baffled Downlight

All steel construction. (3) heat treated spring steel mounting clips. Black socket aiming bracket with screws (provided in carton).

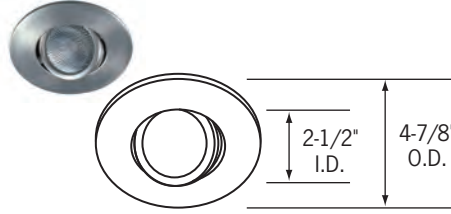


CTR2007-(P, B, NK)
Surface Adjustable

28° vertical adjustment. All steel construction. (3) heat treated spring steel mounting clips. Lamp retaining sweep spring clip. **PAR20 Lamp only.**

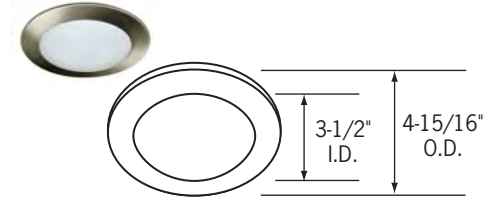

CTR2011FR-(NK, P)

Flat Frosted Glass Lens Shower Light
All steel construction. (3) heat treated spring steel mounting clips. 1/8" thick heavy duty polyethylene sponge gasket. Wet location listed.

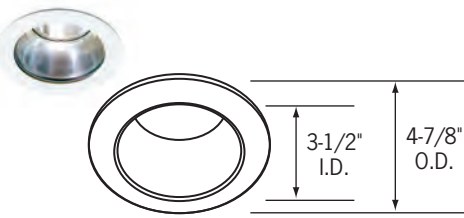


CTR2002-BLK-B
Black Specular Aluminum Reflector, Black Trim

CTR2002-CLR-P
Clear Specular Aluminum Reflector


CTR2002-WHT-P
White Specular Aluminum Reflector

All steel construction. (3) heat treated spring steel mounting clips. Black socket aiming bracket with screws (provided in carton).

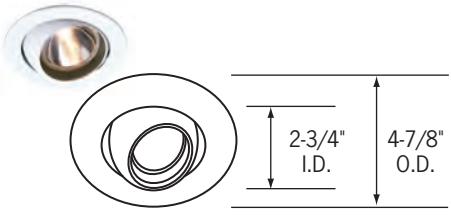

CTR2008-P
Eyeball

30° vertical adjustment. All steel construction. (3) heat treated spring steel mounting clips.

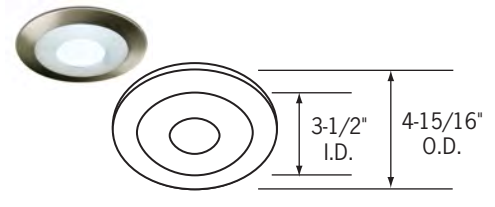

CTR2011-PH-(NK, P)

Flat Frosted Glass Lens Shower Light with Clear Pin Hole
All steel construction. (3) heat treated spring steel mounting clips. 1/8" thick heavy duty polyethylene sponge gasket. Wet location listed.

Ordering Information

Example Order: -

Housing

R4ZRE20

Lamp

- ML06D-BR27K** - 9.5W BR20, 2700K
- ML06D-BR30K** - 9.5W BR20, 3000K
- ML06D-BR35K** - 9.5W BR20, 3500K
- ML06D-BR40K** - 9.5W BR20, 4000K
- ML06D-3027K** - 7W PAR20, 30°, 2700K
- ML06D-3030K** - 7W PAR20, 30°, 3000K
- ML06D-3035K** - 7W PAR20, 30°, 3500K
- ML06D-3040K** - 7W PAR20, 30°, 4000K
- ML09D-3527K** - 10W PAR20, 35°, 2700K
- ML09D-3530K** - 10W PAR20, 35°, 3000K
- ML09D-3535K** - 10W PAR20, 35°, 3500K
- ML09D-3540K** - 10W PAR20, 35°, 4000K
- ML06D-1527K** - 10W PAR20, 15°, 2700K
- ML06D-1530K** - 10W PAR20, 15°, 3000K
- ML06D-1535K** - 10W PAR20, 15°, 3500K
- ML06D-1540K** - 10W PAR20, 15°, 4000K

Trim

Options

- CP** - Chicago Plenum
- HB-20** - 20" T-Bar Hanger Set
- HB-30** - 30" T-Bar Hanger Set