

## INSTALLATION INSTRUCTIONS | CY3 3-1/2" Round Indoor/Outdoor Cylinders: Flexible Cable Pendant Mount

**Note:** Before attempting installation please refer to your local electrical code

### IMPORTANT SAFETY INSTRUCTIONS

Installation, inspection and maintenance of this luminaire must be carried out by a qualified electrician.

Read all the instructions before installation. Save instructions for later use.


When installing or using this luminaire, all basic safety precautions, warnings, restrictions and recommendations must be followed, including the following:

- Turn off power at fuse or circuit breaker box before installation and before performing any maintenance work
- Product must be grounded to avoid potential electric shock and any other potential hazards
- Wear rubber soled shoes, proper safety glasses and gloves, and work on a sturdy wooden or non-conductive ladder
- Product must be mounted in locations and at heights in compliance with the NEC and all local building codes
- Installing contrary to instructions may cause unsafe conditions
- Do not exceed the nominal supply voltage or amperage ratings
- Do not install any luminaire assembly closer than 6-inches from any curtains or combustible materials
- Do not mount near gas or electric heaters
- Do not block the light from the luminaire, in whole or in part, as this may cause unsafe conditions
- Make sure the supply voltage is the same as the rated luminaire voltage
- Do not operate in ambient temperatures above those specified for the luminaire
- Avoid direct eye contact with the light source
- Always support the weight of the luminaire
- Use correctly rated supply conductors as indicated by the luminaire labeling
- Equipment should be mounted in location and at heights where it will not readily be subject to tampering by unauthorized personnel
- To avoid hazards to children, account for all parts and properly dispose of all packing materials
- **WARNING**  
Risk of fire; most dwellings built before 1985 have supply wire rated at 60°C. Consult a qualified electrician before installation.
- Call the Technical Support Department at ConTech Lighting with any installation questions: 847.559.5500

### INSTALLATION

**NOTE:** Luminaire is designed to mount flush to ceiling surface

1. Detach the Canopy Mounting Bracket from the Canopy by loosening the two (2) side screws and twisting the mounting bracket clockwise and up
2. Attach the Canopy Mounting Bracket to the existing Junction Box in the ceiling
3. Feed the Cylinder Wiring Cable through Ceiling Canopy to desired length and tighten the two (2) strain relief set screws to secure cable in place
4. The luminaire is provided with 10 feet of cable. Being sure to leave at least 6-inches of excess for wiring, trim Supply Cable to desired length and strip individual Supply Wires to prepare for connections.
5. Attach Tether between Canopy and Mounting bracket to aide in wiring
6. Follow the wiring diagram (see Page 2) for the appropriate electrical/ dimming option
7. Carefully feed any excess Wire into the Junction Box to avoid pinching any Wires
8. Re-attach Cylinder to the Canopy by twisting into position and tightening the two (2) side screws

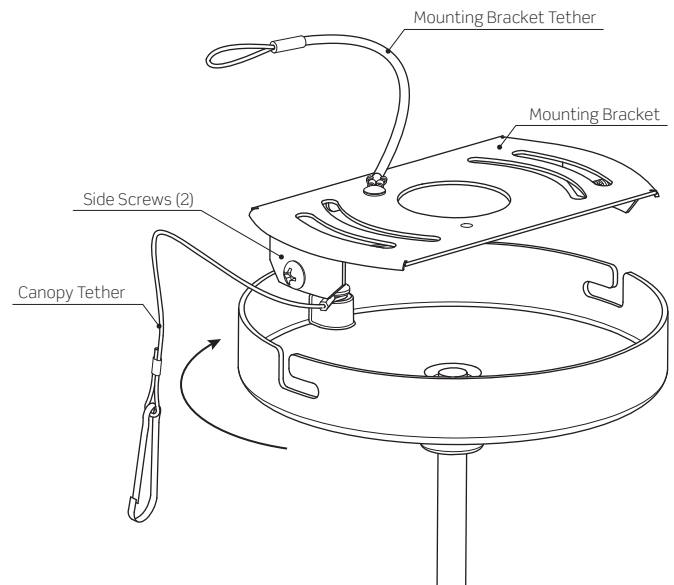


# INSTALLATION INSTRUCTIONS | CY3 Series 3-1/2" Round Indoor/Outdoor Cylinders: Wiring Diagrams

**Note:** Before attempting installation please refer to your local electrical code


## WIRING DIAGRAMS

### DIMMING OPTIONS


**DIMMING OPTION: 12D1**  
**ELECTRICAL: 120V**  
**DIMMING: Forward/Reverse Phase**

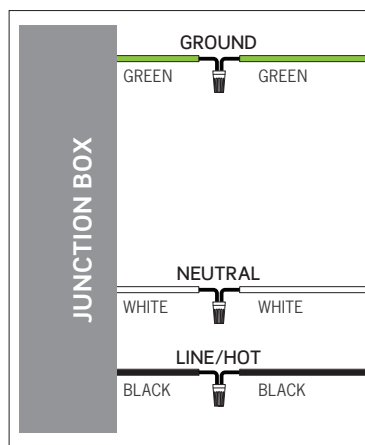

**DIMMING OPTION: MVD2**  
**ELECTRICAL: 120V or 277V**  
**DIMMING: 0-10V**

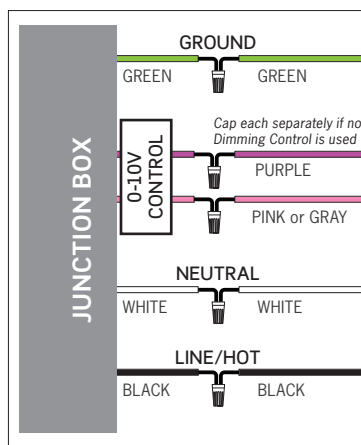

**DIMMING OPTION: MVD4**  
**ELECTRICAL: 120V or 277V**  
**DIMMING: Lutron EcoSystem®**

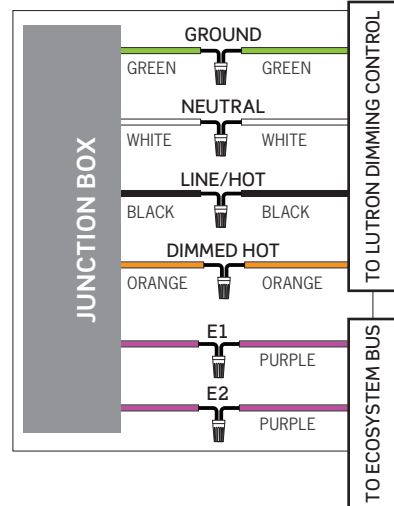

### RDB REMOTE DRIVER OPTION

