



CYLINDER LUMINAIRE FAMILY





Platform of flat-back cylinder luminaires designed to provide uniformity in form and function

- Sleek design with superior performance
- Multiple mounting styles for any application
- Wide range of wattage/lumen outputs, luminaire sizes, and beam distributions
- Specification grade performance TIR optics
- Field interchangeable optics within each fixture size to allow for changing environments



CEILING MOUNT

Mounts to a standard recessed junction box for downlighting applications; ideal for open floor plans



MONO-POINT

Precision aiming adjustment: 315° horizontal rotation and 90° vertical tilt; perfect for accent lighting



FLEXIBLE CABLE

Includes 48" of Field Adjustable Cable; impeccable over tables, bars, desks and islands



TRACK MOUNT

Versatile and flexible; excellent for highlighting merchandise in retail applications

AT A GLANCE

	CTL9050	CTL9051	CTL9052	CTL9053	CTL9054
WATTAGE	7W	9W	14W	20W	34W
LUMEN OUTPUT ¹	651Lm	1021Lm	1462Lm	2123Lm	3441Lm
DIMMING TYPE	INCANDESCENT, FORWARD PHASE				

1. Lumen values are approximate, see photometric test results

- Constructed of extruded and machined aluminum
- Single, high lumen output multi-chip LED array, available in 2700K, 3000K, 3500K and 4000K CCT; 90+ CRI
- Engineered TIR optics provide a smooth uniform beam, maximizing output and minimizing glare
- cETLus Certified to UL standards on base models; suitable for dry locations
- DLC Listed and complies with 2019 Title 24 Part 6 JA8 High Efficacy LED Light Source Requirements
- Fixtures are covered by ConTech's full five (5) year replacement guarantee after date of purchase



CEILING MOUNT



FLEXIBLE CABLE



MONO-POINT



TRACK MOUNT

ORDERING INFORMATION

System	Wattage/Lumens	Mounting	Beam	Color Temp	Options	Finish
CTL ² - ConTech	9050 - 7W/651Lm	- Leave Blank for Track Mount Luminaires	S ⁶ - Spot	90+ CRI	D - Dimming	B - Black
HTL ⁴ - Halo	9051 - 9W/1021Lm		M ⁷ - Medium	27C - 2700K		P - White
LTL ⁵ - Lightolier	9052 - 14W/1462Lm		F - Flood	3C - 3000K		S - Silver
NCTL - Nordic Tek	9053 - 20W/2123Lm	CM - Ceiling Mount	WF - Wide Flood	35C - 3500K		
Fixture includes 120V 2C/2N Adapter	9054 - 34W/3441Lm	FC* - Flexible Cable MP - Mono-Point		4C - 4000K		
<p>* Consult factory for longer cable drops, up to 96" (8 ft) maximum</p> <p>Black Flex Cable luminaire provided with Black Fabric Cord, White luminaire with White Fabric Cord and Silver luminaire with Gray Fabric Cord</p>						

For Luminaire Accessories (Snoots, Barn Doors, Lenses and Louvers), Accessory Holders and Replacement Optics, see Product Specification Sheets

2. Standard ConTech track luminaires (CTL Units) are cCSAus certified as-is for use with ConTech Lighting LT/LT2 Single Circuit/Two Circuit Track Systems and Luxbeam Track Systems, as well as Juno^{®3} Lighting Trac-Master[™] Systems.
By changing the prefix in the part number, ConTech can install inserts to make fixtures compatible with other manufacturers. For more information, please consult factory.

3. Juno is a registered trademark of Juno Lighting
4. Halo is a registered trademark of Cooper Lighting
5. Lightolier is a registered trademark of Signify
6. Spot Beam available only for CTL9050 Series
7. Medium Beam not available for CTL9050 Series



Platform of flat-back cylinder luminaires designed to provide uniformity in form and function




CEILING MOUNT



FLEXIBLE CABLE

48" Field Adjustable Cable Standard

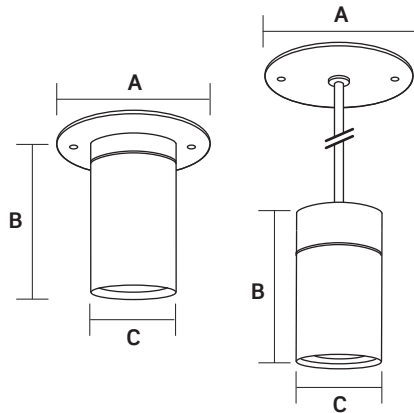


	A	B	C
CTL9050	4-3/4"	4-3/4"	2-3/8"
CTL9051	4-3/4"	5-1/4"	2-3/4"
CTL9052	4-3/4"	5-1/4"	2-3/4"
CTL9053	4-3/4"	6-1/8"	3-3/16"
CTL9054	4-3/4"	6-7/8"	3-15/16"



MONO-POINT



TRACK MOUNTING

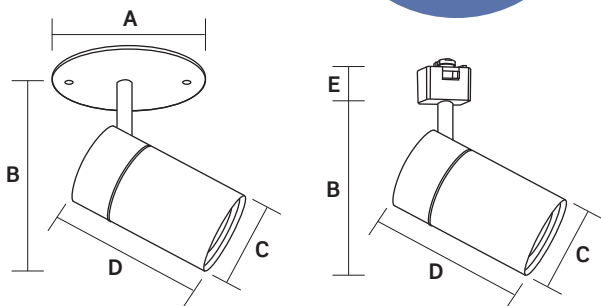

	A	B Min to Max	C	D	E
CTL9050	4-3/4"	3-11/32" to 5-1/8"	2-3/8"	4-3/4"	1"
CTL9051	4-3/4"	3-3/4" to 5-3/4"	2-3/4"	5-1/4"	1"
CTL9052	4-3/4"	3-3/4" to 5-3/4"	2-3/4"	5-1/4"	1"
CTL9053	4-3/4"	4-1/2" to 6-13/16"	3-3/16"	6-1/8"	1"
CTL9054	4-3/4"	5" to 7-7/8"	3-15/16"	6-7/8"	1"