

DATE


PROJECT

TYPE

CRS5 | 6W Quick Release LED Mini-Pendant

| | CRS5 |
|---------------------------|---|
| WATTAGE | 6W |
| LUMEN OUTPUT ¹ | 400Lm |
| COLOR TEMPERATURE | 2700K / 3000K |
| CRI | 90 min., 93+Typical |
| INPUT WATTAGE | 5.6W |
| INPUT VOLTAGE | |
| Forward Phase Driver | 120VAC, 50/60Hz |
| 0-10V Driver | 120/277VAC, 50/60Hz |
| LENGTHS | 2-Ft / 4-Ft / 6-Ft / 8-Ft Length is field adjustable |
| SHADE TYPE | Gravity or Lock Fit Shade options sold separately |
| MOUNTING OPTIONS | Line Voltage Track Adapter (Forward Phase Dimming only), Decorative Ceiling Canopy, Thin Ceiling Canopy, Standard Ceiling Canopy, or Three Pendant Ceiling Canopy |
| FINISHES | Antique Bronze or Black with Black Cable, White or Silver with Transparent Cable |
| LISTINGS | cCSAus Certified to UL Standards; Suitable for Dry Locations |
| WARRANTY | Five (5) year replacement after date of purchase |
| SYSTEM RATING | 50,000 Hours @ 70% Lumen Maintenance |

DISCONTINUED ITEM:
LIMITED INVENTORY
Consult Factory for Availability

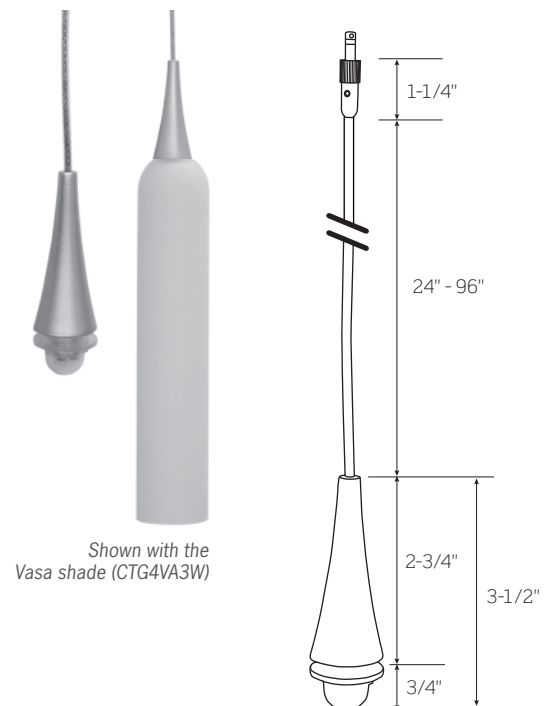

- Versatile 6W integrated LED Mini-Pendant with 400 delivered lumens provides simple elegance for decorative lighting.
- Compatible with most ConTech Gravity- and Lock-Fit Decorative Shades, sold separately.
- The smaller pendant form factor and light output facilitate the use of smaller shades to accommodate a large array of design needs.
- Available in four (4) standard lengths; for installations requiring a custom length, the pendant is easily field adjustable.
- Must be used with one of the mounting options listed on page 2.
- Frosted diffusion lens, Gravity-Fit shade adapter, and lens installation tool are included.
- Complete pendant consists of three (3) components ordered separately: CRS5 Mini Pendant, CRS5 Mounting Option, and Decorative Shade.
- Single LED package available in 2700K and 3000K with a CRI of 90+.
- Excellent fixture to fixture color consistency within a 3-step MacAdam Ellipse tolerance.
- Dimming allows smooth illumination down to 10%.

ORDERING INFORMATION

Example Order: -

Pendant:

CRS524 - 2-Feet (24-Inches) Pendant
CRS548 - 4-Feet (48-Inches) Pendant
CRS572 - 6-Feet (72-Inches) Pendant
CRS596 - 8-Feet (96-Inches) Pendant

Color Temp:

27K - 2700K
30K - 3000K

CRI:

C - 90 Min., 93+ Typical

Finish:

AB - Antique Bronze/Black Cable
B - Black/Black Cable
P - White/Transparent Cable
S - Silver/Transparent Cable

1. Approximate lumen output based on 3000K performance; see photometric test results for additional information

MOUNTING OPTIONS ON PAGE 2

DATE

PROJECT

TYPE

CRS5 | 6W Quick Release LED Mini-Pendant

MOUNTING OPTIONS



CRS5-TQRCD Series

Thin Ceiling Canopy

1-1/2-In. Height, 4-3/8-In. Diameter

Mounts to NEC approved 4-inch Round or Octagon Junction Box with minimum depth of 1-1/2-inches. 0-10V Dimming Driver included.

DISCONTINUED ITEM: LIMITED INVENTORY

Consult Factory for Availability



CRS5-QRCD Series

Ceiling Canopy

1-5/16-In. Height, 4-3/8-In. Dia.

Dimming Driver included.

DISCONTINUED ITEM: LIMITED INVENTORY

Consult Factory for Availability

Mounting:

CRS5-TQRCD1 - Triac Dimming Driver

CRS5-TQRCD2 - 0-10V Dimming Driver

Finish:

AB - Antique Bronze

B - Black

P - White

S - Silver

Mounting:

CRS5-QRCD1 - Triac Dimming Driver

CRS5-QRCD2 - 0-10V Dimming Driver

Finish:

AB - Antique Bronze

B - Black

P - White

S - Silver



CRS5-DQRCD Series

Decorative Ceiling Canopy

2-1/2 In. Height, 4-3/8 In. Dia.

Mounts to NEC approved 4-inch Round or Octagon Junction Box with minimum depth of 1-1/2 inches. Dimming Driver included.

DISCONTINUED ITEM: LIMITED INVENTORY

Consult Factory for Availability



CRS5-3QRCD Series

Decorative Ceiling Canopy

2-In. Height, 12-In. Dia.

Mounts to NEC approved 4-inch Round or Octagon Junction Box with minimum depth of 1-1/2-inches. 0-10V Dimming Driver included.

DISCONTINUED ITEM: LIMITED INVENTORY

Consult Factory for Availability

Mounting:

CRS5-DQRCD1 - Triac Dimming Driver

CRS5-DQRCD2 - 0-10V Dimming Driver

Finish:

AB - Antique Bronze

B - Black

P - White

S - Silver

Mounting:

CRS5-3QRCD1 - Triac Dimming Driver

CRS5-3QRCD2 - 0-10V Dimming Driver

Finish:

AB - Antique Bronze

B - Black

P - White

S - Silver



CRS5-LVTQRD1 Series

Line Voltage Track Adapter

2-Inch Height, 7-Inch Length

Use to connect Pendant to standard Line Voltage Track. Forward Phase Dimming Driver included.

DISCONTINUED ITEM: LIMITED INVENTORY

Consult Factory for Availability

Mounting:

CRS5-LVTQRD1 - Triac Dimming Driver

Finish:

B - Black

P - White

S - Silver

DATE

PROJECT

TYPE



CRS5 | 6W Quick Release LED Mini-Pendant

PHOTOMETRICS:

CRS59630KC-S

Designed for 50,000 Hour Lamp Life¹; LM-63 Test No. G19010902

Light Output (Fixture Delivered Lumens): 407
Total Watts@120V: 5.6
Lumens Per Watt: 74
Color Rendering Index (CRI)²: 93
Color Temperature (CCT)³: 3016K
Spectral Power Distribution Chart⁴
 LM-79 Test No. S17101601

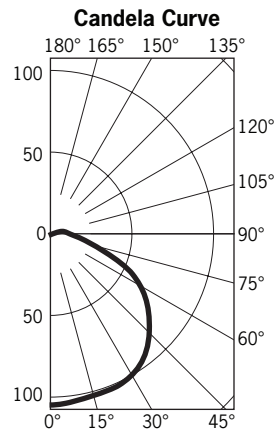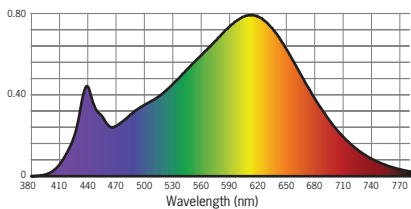

Candlepower Summary

| FROM 0 | CANDELA | LUMENS |
|--------|---------|--------|
| 0 | 105 | |
| 5 | 104 | 11 |
| 15 | 103 | 29 |
| 25 | 102 | 47 |
| 35 | 95 | 60 |
| 45 | 86 | 66 |
| 55 | 72 | 64 |
| 65 | 54 | 53 |
| 75 | 32 | 34 |
| 85 | 17 | 12 |
| 95 | 12 | |



Intensity Distribution

| DISTANCE (FT.) | FOOTCANDLES (FC) | BEAM DIAMETER (FT.) |
|----------------|------------------|---------------------|
| 4' | 6.5 | 17.7 |
| 6' | 2.9 | 26.5 |
| 8' | 1.6 | 35.3 |
| 10' | 1.0 | 44.2 |
| 12' | 0.7 | 53.0 |
| 14' | 0.5 | 61.8 |

CRS59630KC-S/CTG4VA3W

Designed for 50,000 Hour Lamp Life¹; LM-63 Test No. G19010901

Light Output (Fixture Delivered Lumens): 328
Total Watts@120V: 5.6
Lumens Per Watt: 58.5
Color Rendering Index (CRI)²: 93
Color Temperature (CCT)³: 3016K
Spectral Power Distribution Chart⁴
 LM-79 Test No. S17101601

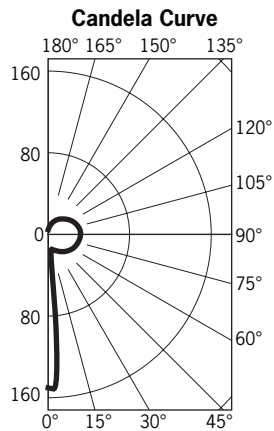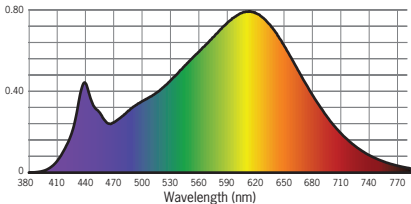

Candlepower Summary

| FROM 0 | CANDELA | LUMENS |
|--------|---------|--------|
| 0 | 147 | |
| 10 | 28 | 14 |
| 30 | 15 | 16 |
| 50 | 22 | 37 |
| 70 | 29 | 59 |
| 90 | 32 | 70 |
| 110 | 32 | 65 |
| 130 | 27 | 45 |
| 150 | 19 | 21 |
| 170 | 1 | 0 |
| 180 | 0 | |

Intensity Distribution

| DISTANCE (FT.) | FOOTCANDLES (FC) | BEAM DIAMETER (FT.) |
|----------------|------------------|---------------------|
| 4' | 9.2 | 0.8 |
| 6' | 4.1 | 1.2 |
| 8' | 2.3 | 1.6 |
| 10' | 1.5 | 2.0 |
| 12' | 1.0 | 2.4 |
| 14' | 0.7 | 2.8 |

1. Accuracy of rendering colors
2. Color appearance of light source
3. Colors present within the light source

*Dependent on surrounding temperatures

DIMMING

Compatible with most Electronic Low Voltage and Forward Phase (Incandescent) Dimmers

Electronic Low Voltage (ELV)

Leviton Acenti
 Lutron Faedra
 Lutron NovaT

TRIAC (Incandescent)

Leviton Illumitech
 Leviton SureSlide
 Leviton Trimatron
 Leviton True Touch
 Cooper Aspire
 Lutron Skylark
 Lutron Maestro