


OTL93 SERIES | Gallery M Track Luminaire with 0-10V Dimming Track System Adapter featuring Bridgelux® Warm Dim LED



High performance track luminaire delivering high outputs and superior beam control

- Clean aesthetics, simple cylinder form
- Multiple beam distributions
- Delivering up to 2400 Lumens
- Bridgelux® Vesta® Warm Dim LED; 3000K to 1800K

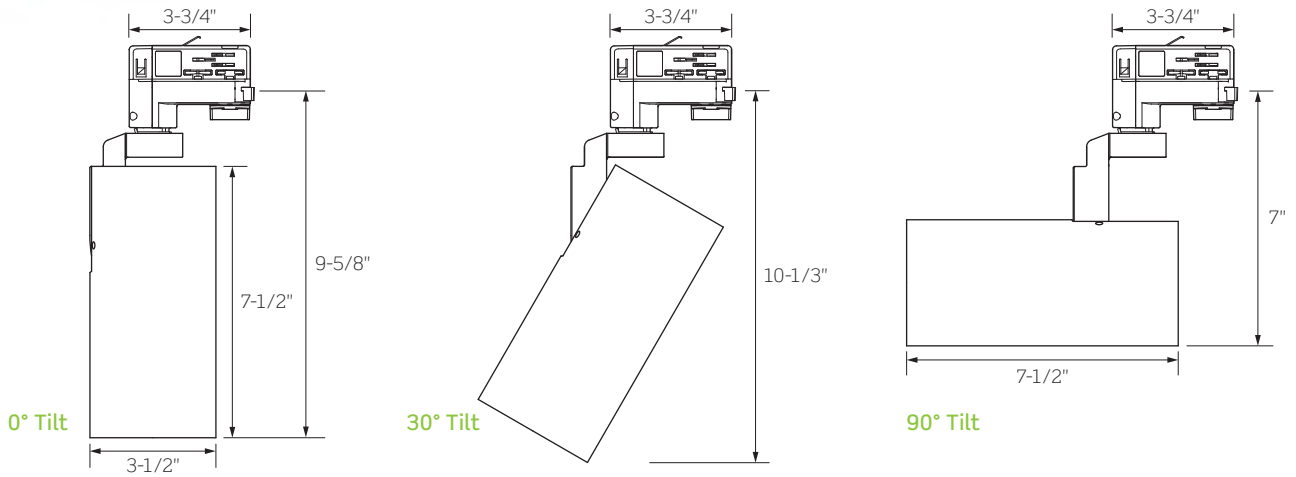

	OTL932	OTL935
WATTAGE	16W	35W
LUMEN OUTPUT ¹ BY BEAM SPREAD		
Spot (14°)	1188Lm	N/A
Narrow Flood (22°)	N/A	2310Lm
Medium Flood (37°)	1158Lm	2524Lm
COLOR TEMPERATURE	3000K to 1800K (See Dimming Compatibility for low end CCT)	
CRI	95	
FINISHES	Matte Black / Matte White / Matte Silver	
DRIVER INPUT VOLTAGE	120V or 277V, 50/60Hz	
DIMMING TYPE	0-10V Dimming	
COMPATIBILITY	Compatible with ConTech Lighting O2CD 0-10V Dimming Track System	
LISTINGS	cCSAus Certified for use in the U.S. and Canada; Suitable for Dry Locations	
WARRANTY	Five (5) year replacement after date of purchase	
SYSTEM RATING	50,000 Hours @ 70% Lumen Maintenance	

1. Approximate lumen output based on 3000K performance; see photometric test results for additional information

OTL93 SERIES | Gallery M Track Luminaire with 0-10V Dimming Track System Adapter featuring Bridgelux® Warm Dim LED

ORDERING INFORMATION

Example Order: OTL932SPWD12D2-P

LED Series	Beam Option	CCT/CRI	Driver ⁴	Finish
OTL932 16W	SP² Spot: 14° Beam / 30° Field	95 CRI	12D2 120V 0-10V Dimming	B Matte Black
OTL935 35W	NF³ Narrow Flood: 24° Beam / 45° Field	WD 3000K to 1800K	27D2 277V 0-10V Dimming	P Matte White
	MF Medium Flood: 38° Beam / 63° Field			S Matte Silver


- 2. Spot (SP) Beam is only available for Series 2 (16W)
- 3. Narrow Flood (NF) Beam is only available for Series 5 (35W)
- 4. Selected Driver Voltage MUST match Track System Voltage

ACCESSORY & REPLACEMENT OPTIC ORDERING INFORMATION

Each Gallery M Luminaire may hold up to two (2) pieces of Media **OR** one (1) Snoot or Barn Door Assembly plus one (1) piece of Media



Snoot
with *Optional Cross Blades*
Exterior painted per finish selection: Black (B), White (P) or Silver (S). Interior and Cross Blades are always Black.



Barn Doors
Black finish. Barn Doors may hold one LF18 Lens or LA-35 Honeycomb Louver.



Honeycomb Louver
Black finish

Accessory
FA-93 Snoot with optional Cross Blades

Finish
B Matte Black
P Matte White
S Matte Silver

Accessory
BD93 Barn Doors

Finish
B Matte Black

Accessory
FA-16-60MM 2-3/8-In. Black Honeycomb Louver
LA-35 3-1/16-In. Black Honeycomb Louver for use within Barn Doors only



Tempered Glass Filters and Lenses
1/8-Inch Thick, typ.

Accessory
LF16 Tempered Glass Filters and Lenses
LF18 Tempered Glass Filters and Lenses for use within Barn Doors only

Finish	
C Clear	A Amber
SL Soft Light	B Blue
SOL Solite	LB Light Blue
LS Linear Spread	G Green
	R Red
	RO Rose
	Y Yellow

Size
60MM 2-3/8-Inch
<i>Leave Blank</i>
3-1/16-Inch
LF18 Series for use within Barn Doors only

Replacement Optics
CTL93WDOPT-SP² Spot Replacement 14° Beam / 30° Field
CTL93WDOPT-NF³ Narrow Flood Replacement 24° Beam / 45° Field
CTL93WDOPT-MF Medium Flood Replacement 38° Beam / 63° Field

- 2. Spot (SP) Beam is only available for Series 2 (16W)
- 3. Narrow Flood (NF) Beam is only available for Series 5 (35W)

OTL93 SERIES | Gallery M Track Luminaire with 0-10V Dimming Track System Adapter featuring Bridgelux® Warm Dim LED

PRODUCT SPECIFICATIONS

PERFORMANCE SUMMARY

- Light that Warms as it Dims
- CCT Range from 3000K to 1800K (3000K at full brightness to 1800K when dimmed to <5%), CRI of 95
- Excellent fixture-to-fixture color consistency within a 3-step MacAdam Ellipse tolerance
- Precise beam control ensures that even at lower aiming angles the luminaire is glare free and quiet in the ceiling
- Full collection of accessories available to produce a myriad of filtering and framing effects
- 120V or 277V 0-10V Dimming. For dimmer compatibility and performance, refer to the Dimming Specifications below.

CONSTRUCTION

- A revolutionary track head with superior optics designed to bring theatre grade beam control to traditional gallery and commercial track heads
- Constructed of die-cast aluminum, the cylindrical body provides thermal management for the luminaire
- An integrated adapter suitable for use with the ConTech O2CD 0-10V Dimming Track System is included
- Locking mechanisms for Tilt (0° to 91°) and Rotation (365°)

- Three (3) Beam Distributions available: 14° Spot, 24° Narrow Flood, and 38° Medium Flood
- The Spot Beam configuration utilizes smaller LES LEDs to achieve beams and may not be used in higher wattage options (see Ordering Information for details)
- Optics are field interchangeable (with restrictions) and provide smooth, striation-free beams
- Luminaire may accept up to two (2) pieces of media (Lens or Louver), one (1) Snoot/Barn Door Assembly plus one (1) piece of media (Lens or Louver). Consult ordering information for proper combinations and sizes.
NOTE: Luminaire may hold one (1) LF16 60MM Series Lens or FA-16-60MM Louver;
Barn Doors may hold one LF18 Series Lens or LA-35 Louver
- Integral ON/OFF switch and track polarity indicator are standard
- Fixture weight: 3 LBS

FIXTURE COMPATIBILITY

- ConTech OTL Track luminaires are compatible with the ConTech Lighting O2CD 0-10V Dimming Track System

DIMMING SPECIFICATIONS

- 0-10V Dimming may be used for 120V or 277V powered luminaires by delivering a separate controlled DC voltage signal which adjusts the light output.

0-10V COMPATIBLE DIMMERS			
MANUFACTURER	PRODUCT	MODEL	LIGHT OUTPUT
Leviton	IlumaTech	IP710-DL	5% to 100%
Lutron	Diva	DVTV	5% to 100%
Lutron	Nova	NFTV	5% to 100%

NOTES

1. If light is measured, then the dimming range is based on light output. If light is not measured, then the dimming range is based on the percentage of output current.
2. Testing was performed with a single fixture connected to dimmer.
3. Testing has been performed on these dimmers, but this does not imply any warranty of compatibility.
4. Dimming performance can be influenced by different loads, as well as variations in dimmer switches within the same model.
5. Dimmer maximum load rating with LED may differ from published traditional source dimmer ratings. Consult manufacturer for maximum dimmer information.
6. Consult factory for additional dimming information.

CTL93 SERIES | Gallery M Luminaire Bridgelux® Warm Dim LED Photometry



CTL932SPWDD: 17W, 3000K, 95 CRI, SPOT BEAM

Test No. G25091703

Fixture Delivered Lumens: 1187.73
 Total Watts@120V: 16.9
 Lumens Per Watt: 70.28
 Center Beam Candle Power: 11195
 Beam Distribution: 14.4°
 Spacing Criterion: 0.28
 Color Rendering Index (CRI)¹: 92.9
 Color Temperature (CCT)²: 2924K
 Designed for 50,000 Hour Lamp Life³

Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	699.7	1.0
6 FT	311.0	1.5
8 FT	174.9	2.0
10 FT	111.9	2.5
12 FT	77.7	3.0
14 FT	57.1	3.5

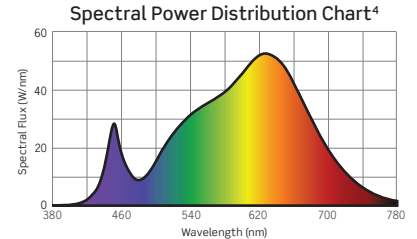



CTL932MFWDD: 17W, 3000K, 95 CRI, MEDIUM FLOOD BEAM

Test No. G25091702

Fixture Delivered Lumens: 1158.27
 Total Watts@120V: 16.9
 Lumens Per Watt: 68.54
 Center Beam Candle Power: 3188
 Beam Distribution: 36.0°
 Spacing Criterion: 0.53
 Color Rendering Index (CRI)¹: 92.9
 Color Temperature (CCT)²: 2924K
 Designed for 50,000 Hour Lamp Life³

Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	199.3	2.6
6 FT	88.6	3.9
8 FT	49.8	5.2
10 FT	31.9	6.5
12 FT	22.1	7.8
14 FT	16.3	9.1

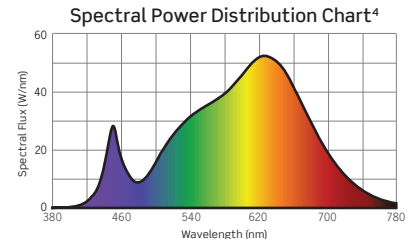



CTL935NFWDD: 35W, 3000K, 95 CRI, NARROW FLOOD BEAM

Test No. G25091701

Fixture Delivered Lumens: 2309.59
 Total Watts@120V: 35.5
 Lumens Per Watt: 65.06
 Center Beam Candle Power: 12050
 Beam Distribution: 22.0°
 Spacing Criterion: 0.37
 Color Rendering Index (CRI)¹: 92.9
 Color Temperature (CCT)²: 2924K
 Designed for 50,000 Hour Lamp Life³

Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	753.1	1.6
6 FT	334.7	2.3
8 FT	188.3	3.1
10 FT	120.5	3.9
12 FT	83.7	4.7
14 FT	61.5	5.4

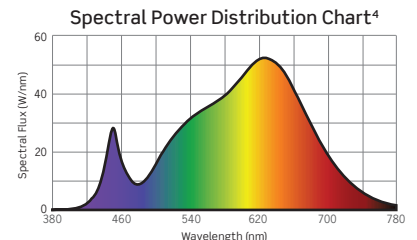



CTL935MFWDD: 35W, 3000K, 95 CRI, MEDIUM FLOOD BEAM

Test No. G25091602

Fixture Delivered Lumens: 2524.46
 Total Watts@120V: 35.6
 Lumens Per Watt: 70.91
 Center Beam Candle Power: 5896
 Beam Distribution: 38.0°
 Spacing Criterion: 0.58
 Color Rendering Index (CRI)¹: 92.9
 Color Temperature (CCT)²: 2924K
 Designed for 50,000 Hour Lamp Life³

Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	368.5	2.8
6 FT	163.8	4.1
8 FT	92.1	5.5
10 FT	59.0	6.9
12 FT	40.9	8.3
14 FT	30.1	9.6

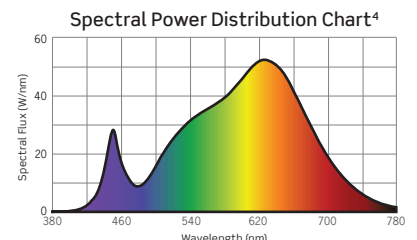

1. Accuracy of Rendering Colors 2. Color Appearance of Light Source 3. Dependent on Surrounding Temperatures 4. Colors Present within the Light Source





CTL93 SERIES | Gallery M Luminaire Bridgelux® Warm Dim LED Photometry

TM-30 DATA: CTL935MFWDD - AT FULL BRIGHTNESS

ANSI/IES TM-30-18 Color Rendition Report Test No. S25091701

Colors are for visual orientation purposes only

R_f	90
R_g	103
CCT(K)	2924K
D_{uv}	-0.0024
u^l	0.2541
v^l	0.5195

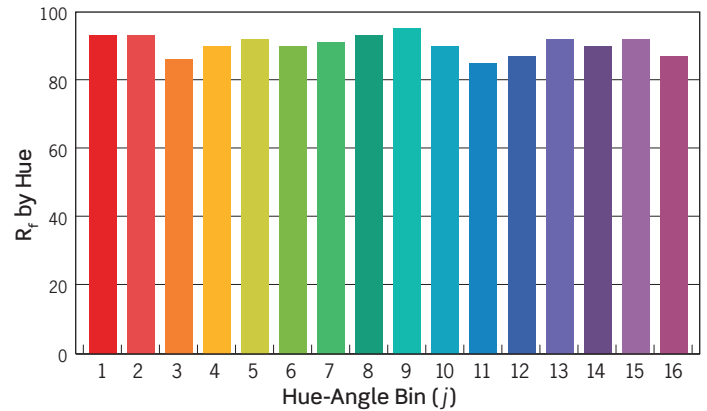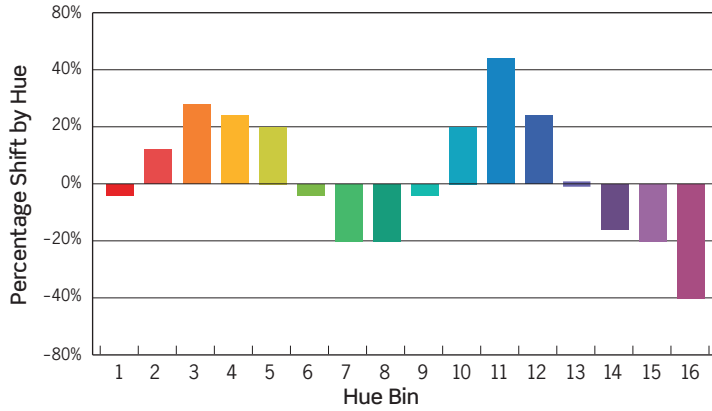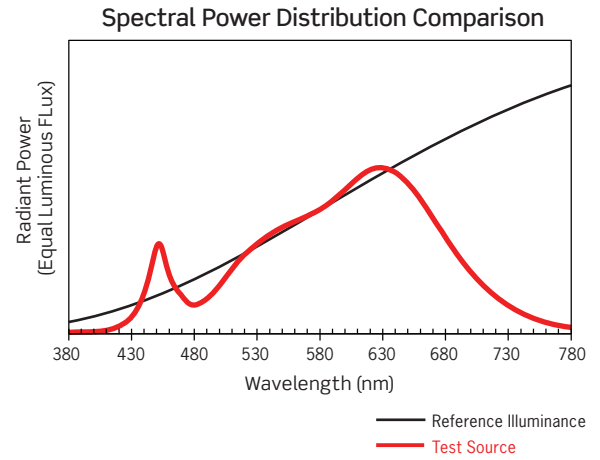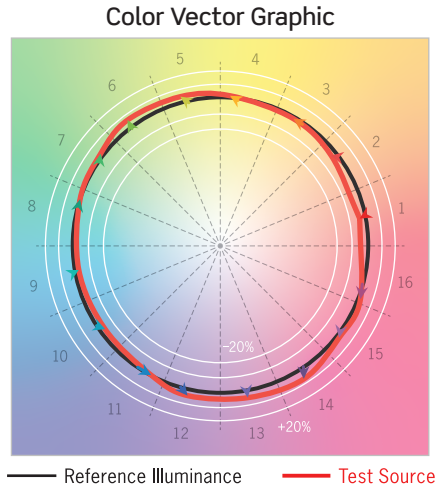

HUE BIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
HUE SHIFT	-1%	3%	7%	6%	5%	-1%	-5%	-5%	-1%	5%	11%	6%	0%	-4%	-5%	-10%
R_f VALUE	93	93	86	90	92	90	91	93	95	90	85	87	92	90	92	87