

CTL8116

Low Voltage Long Gimbal Track Fixture

Specifications/Features

Fixture

Designed for MR16 12V halogen lamps.
 "Sure-Set" yoke design provides accurate aiming and holds fixture in position without unsightly knobs.
 Allows two lenses maximum.
 All styles are equipped with a convenient on/off switch and polarity indicator.

Lamp/Electrical

(1) 75W MR16 Lamp (max.), 12V when used with transformer LA2075
 (1) 50W MR16 Lamp (max.), 12V when used with transformers LA2050N or LA2050NL

LA2050NL – For use with LED Lamps

Electronic transformer
 Input: 120V / 60Hz
 Output: 12V
 Rated Lamp Load: 2.5W min. to 60W max

This fixture can be used with a variety of MR16 LED Lamps. However, with the variances in these lamps, ConTech cannot be responsible, nor guarantee, that all MR16 LED lamps are universally compatible.


On fixtures designed for use with MR16 lamps, ConTech Lighting provides a clear, tempered safety glass. This safety glass should only be used with open MR16 lamps, and not used with MR16 lamps that contain an integral glass lens.

Warranty

This fixture is covered by ConTech's full one (1) year replacement guarantee after date of purchase.

Listing

cULus listed. Suitable for dry locations.

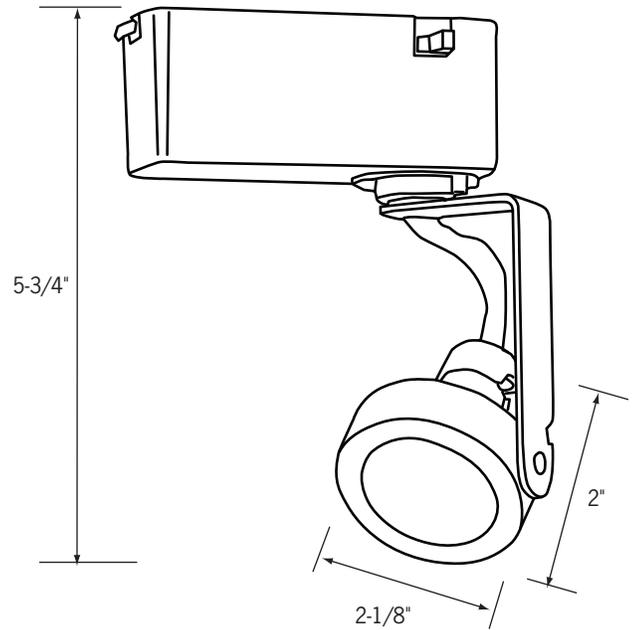

Ordering Information

Example Order: –

Fixture	Finish	Transformer	Finish	Accessories
<input type="text" value="CTL8116"/>	<input type="text" value="P - White
B - Black
S - Silver"/>	<input type="text" value="LA2050N - 20W – 50W Transformer
LA2075N - 20W – 75W Transformer
LA2050NL - 2.5W – 60W Transformer"/>	<input type="text" value="P - White
B - Black
S - Silver"/>	<input glass="" lenses<br="" tempered="" type="text" value="LF16 - A, B, CL, G, LB, R, RO, Y, 73, LS, SL, UV
2"/> FA-16 - Honeycomb Louver LA-816 - Black Snoot THS-16 - Thermal Heat Shield"/>

Color/Pattern Legend
 -A (Amber), -B (Blue), -CL (Clear), -LB (Light Blue),
 -R (Red), -RO (Rose), -Y (Yellow), -73 (Spread Lens),
 -LS (Linear Spread Lens), -SL (Soft Light),
 -UV (Optivex UV Filter)