

Odyssey Line Voltage Flexible Track System

12V Low Voltage Luminaires


Specifications/Features

The Odyssey Low Voltage Luminaire Collection are crafted from high quality materials to provide years of appealing illumination. All luminaires are available in a silver finish to add a modern style to many different environments. An integrated adapter in each luminaire ensures a solid electrical connection and simplified installation on the track. All 12V

luminaires include a 60W Transformer with self-resetting short circuit and overload protection for safe and easy operation. Each luminaire carries ConTech's one year full replacement guarantee after installation. See specific luminaires for lamp type and maximum wattage. Lamps are sold separately. All luminaires are cCSAus Certified for dry locations.

On luminaires designed for use with MR16 Lamps, ConTech Lighting provides a clear, Tempered Safety Glass. This Safety Glass should only be used with **open MR16 Lamps, and not used with MR16 Lamps that contain an Integral Glass Lens.**

Safety Glass should be removed if use of MR16 with Front Glass is required.

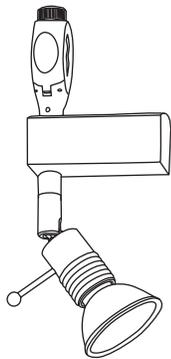


Syros

Lamp: 50W max. MR16 FG, GU5.3 base
Length: 1-1/2"



LIR129T-S

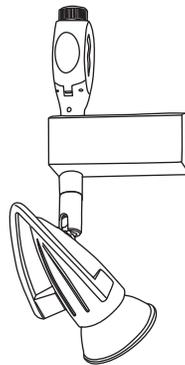


Star Spot without Shade

Lamp: 50W max. MR16 FG, GU5.3 base
Length: 2-3/4"; Diameter: 1-1/4"



LIR140T-S




Frosted White Glass Ring

Glass accessory for Odyssey Syros (LIR129T). Clips included.
Diameter: 4"



CRS-SP130




Shades for Star Spot

Lamp: 50W max. MR16 FG, GU5.3 base
Length: 1-5/8"; Diameter: 2-7/16"



CRS-STAR-B - Blue Glass
CRS-STAR-DC - Die Cast, Silver
CRS-STAR-W - Frosted White Glass

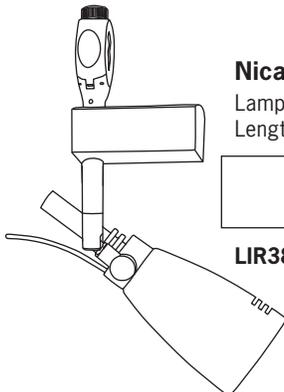


Nica with Metal Shade

Lamp: 35W max. MR16 FG, GU5.3 base
Length: 7"; Diameter: 2-1/2"



LIR381T-S

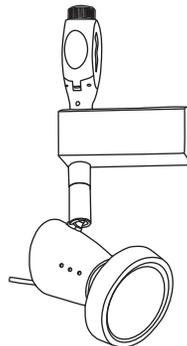

Risa with Ring

Lamp: 50W max. MR16 FG, GU5.3 base
Length: 3"; Diameter: 2-3/8"



LIR4537T-S