
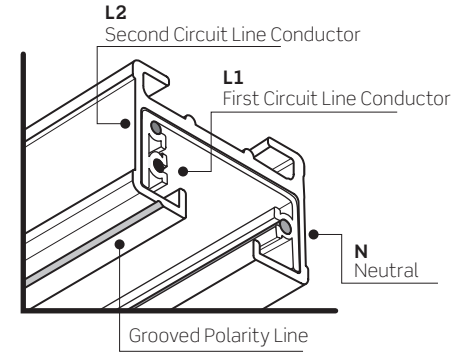


DATE

PROJECT

TYPE

LT2 SERIES | Two-Circuit Line Voltage Track

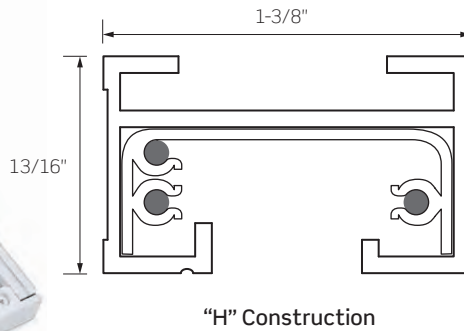

	LT-22	LT-24	LT-26	LT-28	LT-212
LENGTHS	2 Ft / 24 Inches	4 Ft / 48 Inches	6 Ft / 72 Inches	8 Ft / 96 Inches	12 Ft / 144 Inches
NOMINAL LENGTHS	20-1/8 Inches	44-1/8 Inches	68-1/8 Inches	92-1/8 Inches	140-1/8 Inches
	Nominal length Track Sections can be cut in the field for exact fit				
MAX POWER RATING	2400W per Circuit, 4800W Total; NEC allows 80% of full capacity, or 1920W per circuit, 3840W total				
MAX AMP	40A (20A per circuit) @ 120V, 60Hz				
FINISHES	Black, White, Silver; 12 Foot Length not available in Silver Finish				
LISTINGS	cULus Listed; Suitable for Dry Locations only Declare Labeled for use with the Living Building Challenge				
WARRANTY	One (1) year replacement after date of purchase				

ORDERING INFORMATION

Example Order: -

SPEEDSHIP
Select SKUs Shipped within 48-Hours

The following Models are eligible for SpeedShip:

- LT-24-P
- LT-26-P
- LT-28-P

Finish

- B** - Black
- P** - White
- S**¹ - Silver

1. Silver Finish not available for 12 Foot Track

 : These Model Options are eligible for SpeedShip

Track Section Length

- LT-22 - 2 Ft/24 In
- LT-24 - 4 Ft/48 In
- LT-26 - 6 Ft/72 In
- LT-28 - 8 Ft/96 In
- LT-212¹ - 12 Ft/144 In



PRODUCT DETAILS

- Two-Circuit Line Voltage Track has two (2) Hot Conductors and one (1) Common Neutral
- Two Circuits enable splitting lighting loads over one run of track for higher wattage output per running foot of track
- Change lighting effects by simply applying Luminaires to desired Circuits and utilize separate switching
- All ConTech Track Luminaire Adapters for Line Voltage Track have two (2) Position Contacts to access the first Circuit Conductor.
- A set of Adapter Shims is supplied with the track to lock the Luminaire Adapter Contacts into the Second Circuit position.
- Strong "H" construction; solid Copper Conductors with Noryl® Insulators placed within heavy 14 gauge Extruded Aluminum Channels
- Mechanical Polarity using Visual Indicator; simplifies installation and mounting fixtures plus assures proper electrical connections
- Toggle Bolts included for simple surface installation; other mounting options include: T-Bar Clips, Stems, Threaded Rods and Aircraft Cable
- Each Nominal Track Length supplied with two (2) insulated End Caps; replacements available
- Use a minimum of two (2) Mounting Points for 2, 4 and 6 foot Track Sections, three (3) Mounting Points for 8 foot Sections and four (4) Mounting Points for 12 foot Sections of Track.
- Track Sections may be mounted within ConTech's Recessed Track Housing System (RTH Series) to minimize appearance

DATE

PROJECT


TYPE

LT2 SERIES | Two-Circuit Line Voltage Track

SAMPLE LAYOUTS WITH POLARITY

Floor View of Track on Ceiling
All Straight Sections are LT Series Track

Dot = Connector Polarity Arrow Location
Shaded Area = Hot Side Of Connector/Track Section

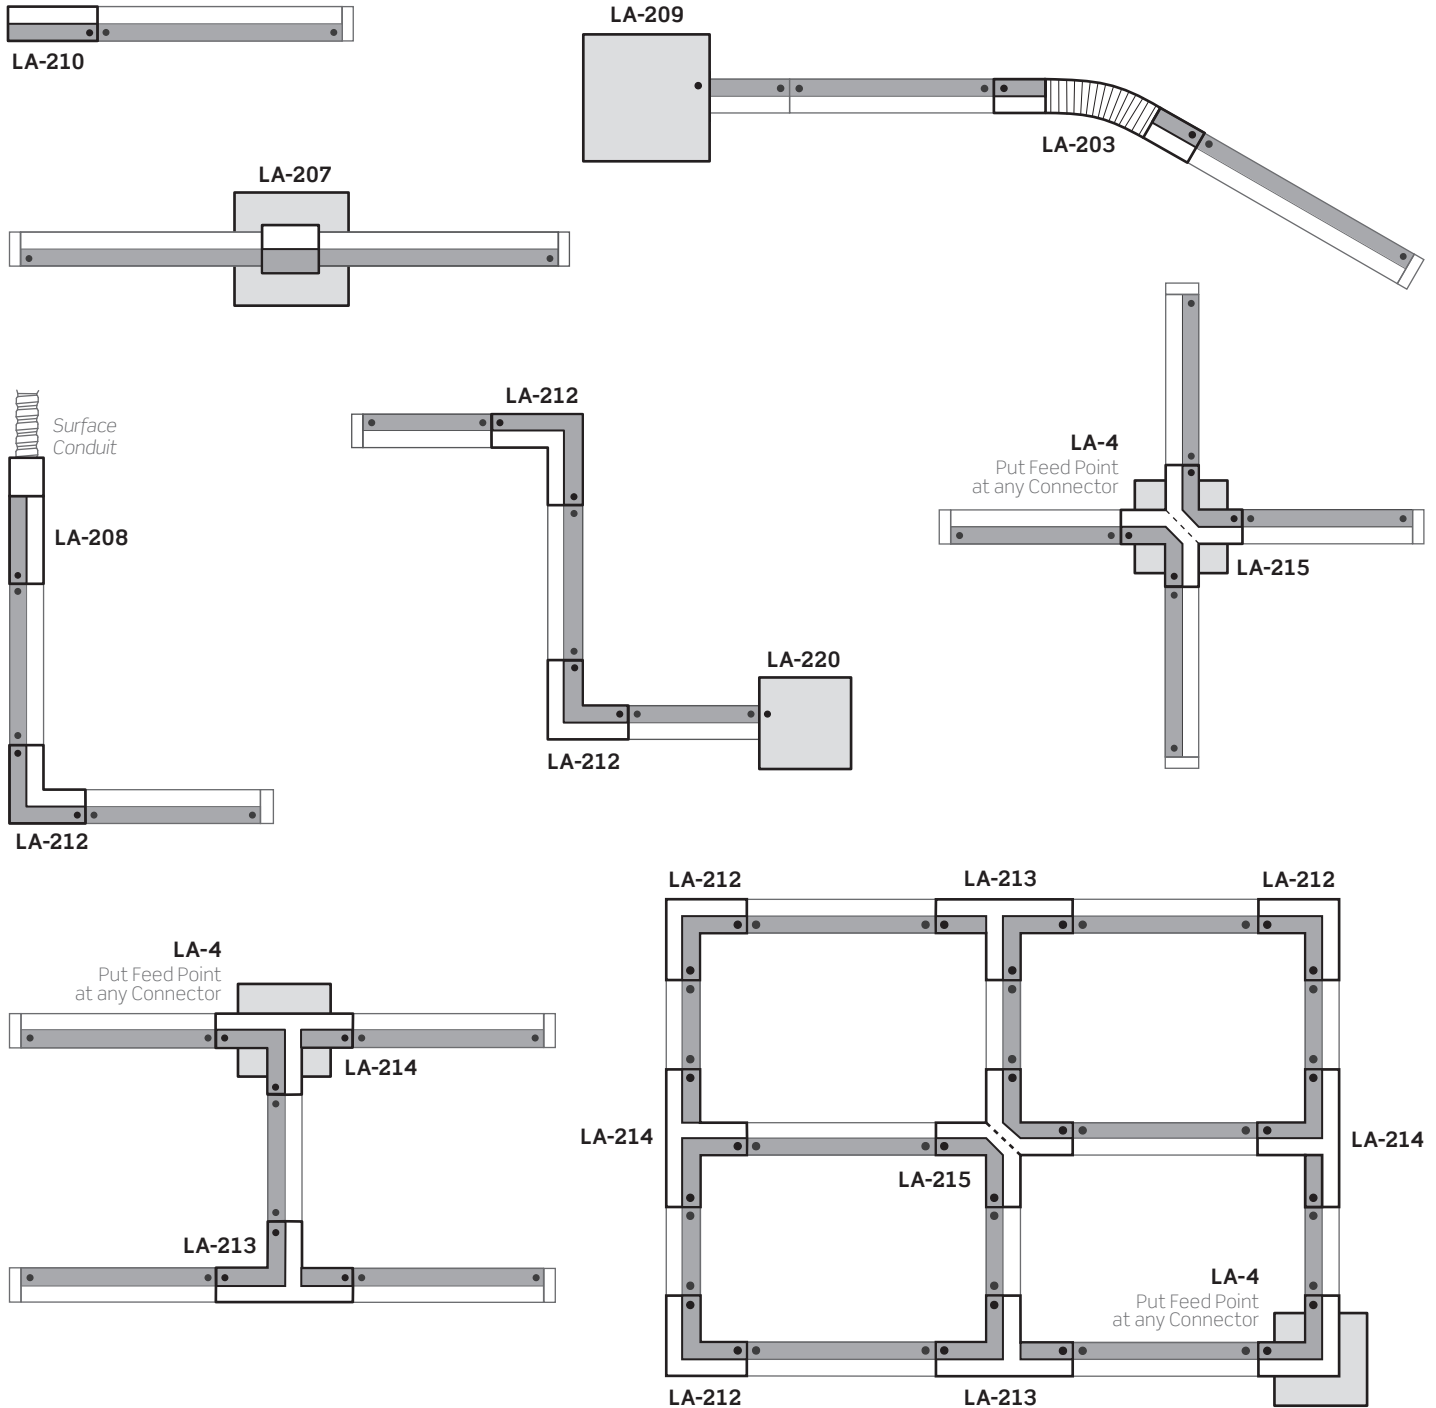

DATE


PROJECT

TYPE

LT SERIES | Single and Two-Circuit Line Voltage Track


LINE VOLTAGE TRACK MOUNTING HOLE LOCATIONS

Top View of Track

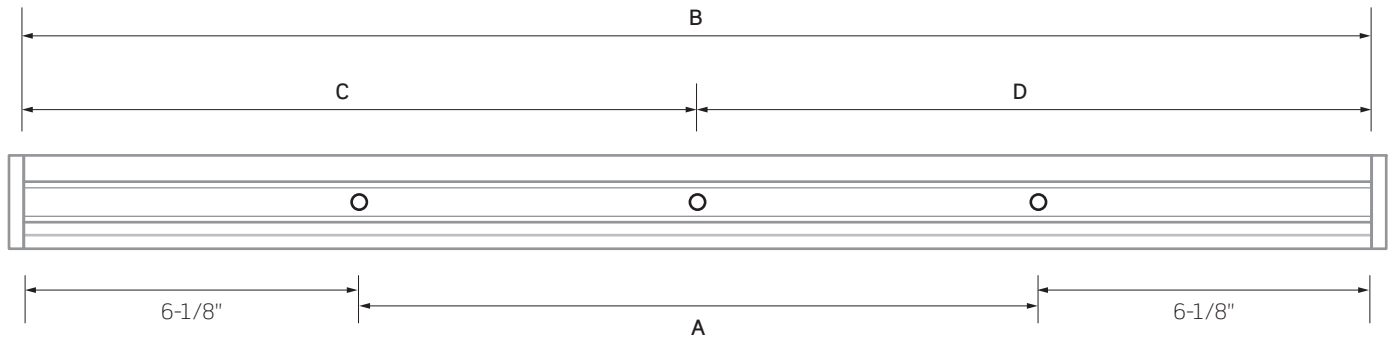


Hole Diameter: 1/4"

	A	B	C	D
2 Ft. Track	7-7/8"	20-1/8"		
4 Ft. Track	31-7/8"	44-1/8"		
6 Ft. Track	55-7/8"	68-1/8"		
8 Ft. Track	79-29/32"	92-5/32"	46-5/32"	46.00"
12 Ft. Track	127-15/16"	140-3/16"	70-3/32"	70.00"



Two (2) End Caps are supplied with each section of Track



Toggle Bolts included for simple surface installation


Toggle Bolt Size
Thread: 3/16" Diameter
Head: 5/16" Diameter

DATE


PROJECT

TYPE

LT SERIES | Two-Circuit Line Voltage Track: Power Feeds




LA-210 Series
Top Access End Feed
 One (1) 1/2 inch top Knock Out for standard electrical conduit




LA-207 Series
Floating Feed Point
 Can be installed anywhere along the Track. Includes: Square Junction Box Canopy Cover, Junction Box Mounting Bracket, Track Adapter, and one (1) LA-211 Series End Cap.

LA-210 Power Feed	B - Black P - White S - Silver	QTY
LA-210A Reverse Polarity Power Feed		

LA-207 Floating Feed Point	B - Black P - White S - Silver	QTY
--------------------------------------	---	------------




LA-208 Series
Surface Conduit End Feed
 One (1) 1/2 inch top Knock Out and one (1) 1/2 inch end Knock Out for surface conduit



LA-209 Series
Outlet Box Feed Kit
 Square Cover Plate with End Feed and one (1) 1/2 inch Knock Out. Kit includes Junction Box Mounting Bracket, Threaded Nipple and Nut.

LA-208 End Feed	B - Black P - White S - Silver	QTY
LA-208A Reverse Polarity End Feed		

LA-209 Outlet Box End Feed	B - Black P - White S - Silver	QTY
--------------------------------------	---	------------



LA-220 Series
T-Bar End Feed
 4-1/8 Inch Square Canopy Cover with three (3) 1/2 inch top Knock Outs. Can be used with T-Grid installations.

LA-220 T-Bar End Feed	B - Black P - White	QTY
---------------------------------	--------------------------------------	------------


: These Model Options are eligible for **SpeedShip**

SPEEDSHIP
 Select SKUs Shipped within 48-Hours


The following Single Circuit Track Power Feeds are eligible for **SpeedShip**:
 LT-210-P

DATE	PROJECT	TYPE
------	---------	------

LT SERIES | Two-Circuit Line Voltage Track Connection Accessories



LA-202 Series
Mini-Connectors
Conductive End to End Connector



LA-213 / LA-214 Series
"T" Connectors
Standard or Reverse Polarity "T" Connector. One (1) 1/2 inch top Knockout that can be used as a feed point.

LA-202 - Conductive

- B - Black
- P - White
- S - Silver


QTY

LA-213 - Standard Polarity


LA-214 - Reverse Polarity

- B - Black
- P - White
- S - Silver

QTY



LA-212 Series
3-Way Joiner
Use as Standard or Reverse Polarity "L" Connector. Includes optional Straight Cover. One (1) 1/2 inch top Knockout that can be used as a Power Feed.



LA-215 Series
"X" Connector
May be used as a feed point. One (1) 1/2 inch top Knockout.

LA-212 - 3-Way Joiner

- B - Black
- P - White
- S - Silver

QTY


LA-215 - Wired as Two (2) Separate "L" Sections

- B - Black
- P - White
- S - Silver


QTY

LA-215A - Wired as Two (2) Separate Straight Sections

LA-215B - Wired as One (1) Four-Way Section



LA-203 Series
Flexible Connector
Allows wall to ceiling or pitched ceiling applications; ±90° max. horizontal range, ±135° max. vertical range



LA-231 Series
Adjustable T-Bar Connector
Connector with square Canopy Cover. Three (3) 1/2 inch top Knockouts. Can be used as Straight Connector Feed with T-Grid installations or configured as a Standard or Reverse Polarity "L" Connector or Straight Connector.

LA-203 - Flexible Connector

- B - Black
- P - White
- S - Silver

QTY

LA-231 - T-Bar Connector

- B - Black
- P - White
- S - Silver

QTY


: These Model Options are eligible for **SpeedShip**

DATE

PROJECT

TYPE

LT SERIES | Two-Circuit Line Voltage Track Connection Accessories




LA-4 Series

Outlet Box Cover Plate

Square Cover Plate with Threaded Center Access Hole. Covers 4 inch octagonal Junction Box. Includes Grounding Washer, Threaded Nipple and Nut.

For use with 3-Way Joiners (LA-12), "T" Connectors (LA-13 or LA-14) or "X" Connector (LA-15).



LA-12LTS Series

Corner Bridge Support

For use with 3-Way Joiners (LA-12); permits mounting Pendant Stem Kits at center of 3-Way Joiner.


LA-4 - Outlet Box Cover Plate

B - Black
P - White
S - Silver

QTY

LA-12LTS - Corner Bridge Support

QTY




LASB-2 Series

Mini-Connector Support Bracket

Steel Support Bracket for Mini-Connectors (LA-2 Series). Aligns and supports two (2) sections of LT Series Track. For use with Pendant Applications.

LASB-2 - Mini-Connector Support Bracket

QTY



LA-12STS Series

Straight Bridge Support

For use with 3-Way Joiners (LA-12); permits mounting Pendant Stem Kits at center of 3-Way Joiner (LA-12). May also be used with "T" Connectors (LA-13 / LA-14) or "X" Connector (LA-15).

LA-12STS - Straight Bridge Support

QTY



SPEEDSHIP

Select SKUs Shipped within 48-Hours

The following Two-Circuit Track Connectors are eligible for **SpeedShip**:

- LT-2-P
- LT-12-P
- LT-13-P

DATE


PROJECT

TYPE

LT SERIES | Single and Two-Circuit Line Voltage Track: Suspension Systems


ConTech recommends using a **minimum** of two (2) Mounting Points for 2, 4 and 6 foot Track Sections, three (3) Mounting Points for 8 foot Sections and four (4) Mounting Points for 12 foot Sections of Track. Installations are Suitable for Dry Locations only.

MOUNTING CLIPS



LA1 Series

T-Bar Mounting Clip for 15/16 Inch Grid
Stud type white T-Bar Mounting Clip with #8-32 x 5/8 inch long Stud for 15/16 inch T-Bar Grid



LA1B Series

Deep Tile Slide-On T-Bar Mounting Clip for 15/16 Inch Grid
Deep tile Slide-on T-Bar Mounting Clip for 15/16 inch Grid. Fits into channel in back of Track Section. May be spaced to 4 feet. Chrome finish.

LA-1


T-Bar Mounting Clip for 15/16 Inch Grid

QTY

LA-1B

Deep Tile Slide-On T-Bar Mounting Clip for 15/16 Inch Grid


QTY



LA1A Series

Slide-On T-Bar Mounting Clip for 15/16 Inch Grid

Slide-on T-Bar Mounting Clip for 15/16 inch Grid. Fits into channel in back of Track Section. May be spaced to 4 feet. Chrome finish.



LA1C Series

T-Bar Mounting Clip for 9/16 Inch Grid
Stud type, unfinished T-Bar Mounting Clip with #8-32 x 5/8 inch long stud for 9/16 inch T-Bar Grid

LA-1A

Slide-On T-Bar Mounting Clip for 15/16 Inch Grid

QTY

LA-1C

T-Bar Mounting Clip for 9/16 Inch Grid; #8-32 x 5/8 inch long stud

QTY

DATE


PROJECT

TYPE

LT SERIES | Single and Two-Circuit Line Voltage Track: Suspension Systems


ConTech recommends using a **minimum** of two (2) Mounting Points for 2, 4 and 6 foot Track Sections, three (3) Mounting Points for 8 foot Sections and four (4) Mounting Points for 12 foot Sections of Track. Installations are Suitable for Dry Locations only.

STEM SUPPORT KITS



LA50 Series

Feed Stem Support Kit: Junction Box Mount
Allows Stem Mounting of Track to drywall ceilings; can be used for Power Feed.
Includes Junction Box Hardware, Canopy Cover and Mounting Bracket for back of Track.



LA53 Series

Feed Stem Support Kit: T-Bar Mount
Allows Stem Mounting of Track to 15/16 inch wide T-Bar Grid; can be used for Power Feed.
Includes Junction Box Hardware, Canopy Cover, T-Bar Mounting Assembly and Mounting Bracket for back of Track.

LA5018A - Kit without Stem
LA5012 - 12 Inch Stem
LA5018 - 18 Inch Stem


B - Black
P - White

QTY

LA-53 - Kit without Stem
LA5312 - 12 Inch Stem
LA5318 - 18 Inch Stem


B - Black
P - White

QTY



LA51 Series

Stem Support Kit: T-Bar Mount
Allows Stem Mounting of Track to T-Bar Grid; **CAN NOT BE USED FOR POWER FEED.**
Includes T-Bar Clip, Stem Adapter and Mounting Bracket for back of Track.



LA-52 Series

Threaded Stem Mounting Kit
Less Stem (provided by others).

LA-51 - Kit without Stem
LA5112 - 12 Inch Stem
LA5118 - 18 Inch Stem


B - Black
P - White

QTY

LA-52 - 5/16 Inch
LA-52-3/8 - 3/8 Inch


B - Black
P - White

QTY



LA-54 Series

Stem Canopy
For use with T-Bar Mount Stem Support Kit (LA-51, LA-5112 or LA-5118).
Plastic Canopy with Set Screw to cover T-Bar attachment.



LA-50 Series

Sloped Ceiling Swivel Stem Kit
Can be used for Power Feed.
Includes J-Box Hardware, Canopy Cover, Swivel Adapter and Mounting Bracket for back of Track, less Stem.

LA-54 - Stem Canopy

B - Black
P - White

QTY

LA-50 - Swivel Stem Kit

B - Black
P - White

QTY

STEM OPTIONS ON PAGE 3

DATE


PROJECT

TYPE

LT SERIES | Single and Two-Circuit Line Voltage Track: Suspension Systems

ConTech recommends using a **minimum** of two (2) Mounting Points for 2, 4 and 6 foot Track Sections, three (3) Mounting Points for 8 foot Sections and four (4) Mounting Points for 12 foot Sections of Track. Installations are Suitable for Dry Locations only.

STEM OPTIONS



STEM Series

Threaded Steel Stems

Assorted Stem lengths without Coupling (sold separately).

Stem Lengths

- 6-STEM-A** - 6 Inch
- 12-STEM-A** - 12 Inch
- 18-STEM-A** - 18 Inch
- 24-STEM-A** - 24 Inch
- 30-STEM-A** - 30 Inch
- 36-STEM-A** - 36 Inch
- 48-STEM-A** - 48 Inch

B - Black
P - White
S - Silver

QTY


Coupling

COUPLING - Stem Coupling

B - Black
P - White
S - Silver

QTY

CABLE MOUNTING KITS

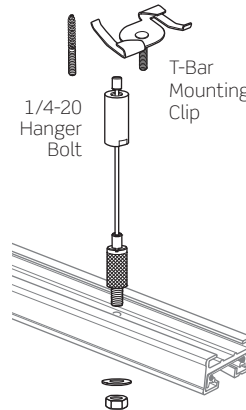

LAC Series

Cable Mounting Kit


Includes Caple Coupler (threaded for 1/4-20 Stud), Cable Holder with Lock Nut, 1/16 inch Galvanized Cable, 1/4-20 Hanger Bolt and T-Bar Mounting Clip with 1/4-20 stud.

LAC-24 - 24 Inch Kit

LAC-48 - 48 Inch Kit

LAC-180 - 180 Inch Kit

QTY

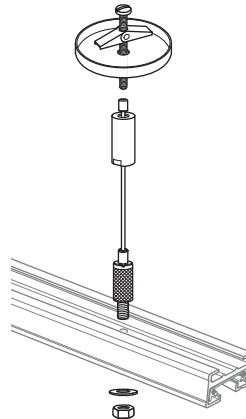

LACD Series

Cable Mounting Kit with Toggle Bolt

For installation to dry wall ceiling. Includes Caple Coupler (threaded for 1/4-20 stud), Cable Holder with Lock Nut, 1/16 inch Galvanized Cable, 1/4-20 Toggle Bolt Assembly and 1-7/8 inch diameter Ceiling Cover Plate.


LACD-24 - 24 Inch Kit

LACD-48 - 48 Inch Kit

LACD-180 - 180 Inch Kit

QTY

WALL EXTENSION BRACKETS

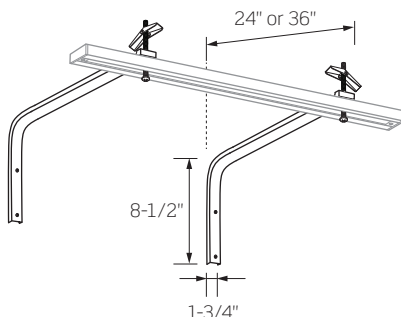

LA2409/LA3609 Series

Wall Extension Brackets

24 or 36 Inches long, for Single and Two Circuit Track. Includes Toggle Bolt, Washers and Screws. 36 Inch Bracket has an additional support arm.

LA2409 - 24 Inch Wall Extension Bracket

LA3609 - 36 Inch Wall Extension Bracket

B - Black
P - White
S - Silver


QTY

DATE

PROJECT

TYPE

LT SERIES | Single and Two-Circuit Line Voltage Track: Track Accessories




LA-11/LA-211 Series

Replacement End Cap

Two (2) End Caps are supplied with each section of Track. One (1) Replacement End Cap can be ordered as needed.

Part Number	Description	Color	QTY
LA-11	Single Circuit Replacement End Cap	B - Black P - White	QTY
LA-211	Two-Circuit Replacement End Cap	S - Silver	




LA-241 Series

Wireway Cover

For use with T-Bar (LA-51 and LA-53 Series) and Junction Box (LA501 Series) Mount Feed Stem and Stem Support Kits. Use with Live End Feeds and Single or Two-Circuit Track.

Part Number	Description	Color	QTY
LA-241	Wireway Cover	B - Black P - White	QTY




8T FRT INSERT

Decorative Insert

Decorative method of closing access to conductors. Required in lower installations. Can be field cut.

Part Number	Description	Color	QTY
8T FRT INSERT		B - Black P - White S - Silver	QTY



TA Series

Raceway Cover

For Single Circuit Track. Plastic Cover slides into back of Track, field cuttable.

Part Number	Description	Color	QTY
TA-4	4 Ft. Raceway Cover	B - Black	QTY
TA-8	8 Ft. Raceway Cover		


DATE

PROJECT


TYPE

LT SERIES | Single and Two-Circuit Line Voltage Track: Luminaire Adapters

LOW VOLTAGE ADAPTERS




LA1816 Series
12V Low Voltage Mono-Point Adapters




LA1004LV Series
Low Voltage Sloped Ceiling Adapter
For Low Voltage Luminaires or Extensions when Track is mounted to sloped ceiling. Use with Low Voltage Transformers (LA2050N, LA2075N) or Low Voltage Mono-Point Adapters (LA1816, LA-18160).

- | | | |
|--|--|-------------------|
| <p>LA1816
120V/12V LV Mono-Point with Built-in Solid State Transformer; use in place of LA2050N or LA2075N</p> <p>LA1816 277V
277V/12V LV Mono-Point with Built-in Solid State Transformer</p> <p>LA-18160
LV Mono-Point without Transformer; use with Remote Transformers only</p> | <p>B - Black
P - White</p> | <p>QTY</p> |
|--|--|-------------------|

- | | | |
|---|--|-------------------|
| <p>LA1004LV
Low Voltage Sloped Ceiling Adapter</p> | <p>B - Black
P - White</p> | <p>QTY</p> |
|---|--|-------------------|




LA20 Series
Low Voltage Transformers
120V/12V Track mounted Solid State Electronic Transformer



LA10 Series
Low Voltage Luminaire Extensions
For Low Voltage Luminaires using Low Voltage Transformers (LA2050N, LA2075N) or Low Voltage Mono-Point Adapters (LA1816, LA-18160).
Max Stem Length: 48 Inches

- | | | |
|--|--|-------------------|
| <p>LA2050N
20-50W 120V/12V LV Transformer
<i>Not available in Silver (S) Finish</i></p> <p>LA2075N
20-75W 120V/12V LV Transformer</p> <p>LA2050NL
1-60W 120V/12V LV Transformer</p> | <p>B - Black
P - White
S - Silver</p> | <p>QTY</p> |
|--|--|-------------------|

- | | | |
|--|-------------------------|-------------------|
| <p>LA1012LV
12 In. Extension; 15-1/2 In. Total Length</p> | <p>P - White</p> | <p>QTY</p> |
|--|-------------------------|-------------------|



LA-118LV Series
Adjustable Bracket with Clamp
Includes 5 foot Coiled Cord with Track Connector. 2-1/2 Inch max. thickness of flat surface for clamp.

- | | | |
|---|--|-------------------|
| <p>LA-118LV
12V LV Adjustable Bracket; Requires LA2050N or LA2075N Transformer</p> | <p>B - Black
P - White</p> | <p>QTY</p> |
|---|--|-------------------|


DATE

PROJECT

TYPE

LT SERIES | Single and Two-Circuit Line Voltage Track: Luminaire Adapters

LINE VOLTAGE ADAPTERS




LA-18 Series

Mono-Point Adapter

For 120V Line Voltage Track Heads. Mounts Track Head to Outlet Box.

For a 277V Mono-Point, the Adapter must be permanently attached to the luminaire at the factory. Add suffix “-MP27” to the luminaire item number when ordering.

May not apply to all luminaires, consult factory for details.



LA1004 Series

Sloped Ceiling Adapter

For 120V Line Voltage Track Heads or Extensions when Track or Mono-Point Adapter is mounted to a sloped ceiling.

LA-18
120V Mono-Point


B - Black
P - White
S - Silver

QTY

LA1004
120V Sloped Ceiling Adapter

B - Black
P - White

QTY




LA10 Series

Luminaire Extensions

For 120V Line Voltage Track Heads.

Max Stem Length: 48 Inches



LA-22 Series

Weighted Base Adapter

For 120V Line Voltage Track Heads. Mounts one (1) Line Voltage Track Head. 66 Inch long Grounded Cord.

LA1004N
4 In. Extension; 4-1/2 In. Total Length

LA1012
12 In. Extension; 14-1/4 In. Total Length

LA1018
18 In. Extension; 20-1/4 In. Total Length

LA1024
24 In. Extension; 26-1/4 In. Total Length

LA1036
36 In. Extension; 38-1/4 In. Total Length

LA1048
48 In. Extension; 50-1/4 In. Total Length


B - Black
P - White
S - Silver

QTY

LA-22
120V Weighted Base Adapter

B - Black
P - White

QTY



LA-21 Series

Duo-Point Adapter

For 120V Line Voltage Track Heads. Accepts two (2) Line Voltage Track Heads to mount to single Outlet Box.

LA-21
120V Duo-Point Adapter

B - Black
P - White

QTY

DATE

PROJECT

TYPE

LT SERIES | Single and Two-Circuit Line Voltage Track: Luminaire Adapters

LINE VOLTAGE ADAPTERS

Track Adapters


Standard ConTech CTL Units are compatible with ConTech Lighting LT/LT2 Single Circuit/Two Circuit and Luxbeam Track Systems, as well as Juno^{®1} Lighting Trac-Master[™] Systems.

By changing the prefix in the part number, ConTech can install inserts which make the Luminaires compatible with other manufacturers' Track Systems.

Replace "CTL" with "HTL" for units to be made compatible with Halo² Power-Trac and Lazer Track Systems.


Replace "CTL" with "LTL" for units to be made compatible with Lightolier³ Lytespan[®] Systems.

For more information, consult factory.

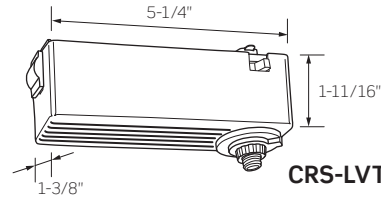

CRS-LVTQ Series

Line Voltage Track Adapter for Quick Release (QR) Luminaires
Connect Quick Release (QR) Series Luminaires and Pendants to Line Voltage Track.

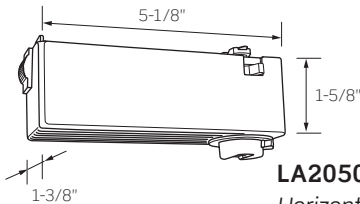

LA2050HYSM Series

Horizontal Line Voltage Track Adapter for Low Voltage Symphony Luminaires

Horizontal Line Voltage Adapter. 120V - 12V Track mounted Solid State Electronic Transformer.

For use with Symphony Low Voltage Luminaires only.

CRS-LVTQR

120V Line Voltage QR Track Adapter; Silver Finish Only

B - Black
P - White
S - Silver

QTY

CRS-LVTQRL


For QR Series Luminaires utilizing Low Wattage LED Lamps

LA2050HSYM

120V - 12V Horizontal Adapter

B - Black
P - White
S - Silver

QTY




LA2050VYSM Series

Vertical Line Voltage Track Adapter for Low Voltage Symphony Luminaires

Vertical Line Voltage Adapter. 120V - 12V Track mounted Solid State Electronic Transformer.

For use with Symphony Low Voltage Luminaires only.



LIR59875 Series

Odyssey Line Voltage Flexible Track Adapter

Connect ConTech CTL Series Track Luminaires to Odyssey Flexible Track System.

10 Pound weight capacity.

LIR59875

120V Odyssey Track Adapter

S - Silver

QTY

LA2050VSYM

120V - 12V Vertical Adapter

B - Black
P - White
S - Silver

QTY

1. Juno is a registered trademark of Juno Lighting
2. Halo is a registered trademark of Cooper Lighting
3. Lightolier is a registered trademark of Philips Lighting


DATE

PROJECT

TYPE

LT SERIES | Single and Two-Circuit Line Voltage Track: Luminaire Adapters

LINE VOLTAGE ADAPTERS




LA-117 Series
Utility Hook
Non-electrical; 10 pound capacity.
NOT UL LISTED.

LA-117
Utility Hook

B - Black
P - White

QTY




LA-118 Series
Coiled Cord with Track Adapter on Adjustable Bracket
Includes 5 foot Coiled Cord with Track Connector. 2-1/2 Inch max. thickness of flat surface for clamp.

LA-118
120V Line Voltage Adjustable Bracket

B - Black
P - White

QTY




LA-16 Series⁴
Grounded Outlet
Integral On/Off Switch and Track Polarity Indicator. 5A Max. capacity.
NOT UL LISTED.

LA-16
Grounded Outlet

B - Black
P - White

QTY




LA-118RP Series
Line Voltage Mono-Point Bracket with Adjustable Clamp
8 Foot Coiled Cord and 3-Wire Grounded Plug. 2-1/2 Inch max. thickness of Flat Surface or Pipe for Clamp.

LA-118RP
120V Line Voltage Mono-Point Bracket with Adjustable Clamp

B - Black
P - White

QTY

4. Track Systems are not allowed to have a convenience receptacle due to a requirement in the National Electrical Code. Article 410.101 (a) states that a "Lighting track fitting shall not be equipped with general purpose receptacles." This requirement in the NEC makes the LA-16 fitting un-listable by UL.



LA-17 Series
Pendant Fixture Adapter: Chain or Cord
Integral On/Off Switch and Track Polarity Indicator. 10 Lb. capacity.
Cord Option is **NOT UL LISTED** unless supplied with RLM Series luminaires.


LA-17
Chain Adapter

B - Black
P - White

QTY

LA-17A
Cord Adapter

LA-17C
Cord Adapter for Luminaires with 18-3 SJT Cable



LA1019 Series
Line Voltage Track Luminaire Extension with Adjustable Clamp
Bracket with 19 Inch long extension and 12 foot Grounded Cord/Plug. 2-1/2 Inch max. thickness of Flat Surface for Clamp.

LA1019
120V Line Voltage Adjustable Bracket with 19 Inch long extension

B - Black
P - White

QTY