


PROJECT



TYPE CATALOG NO.

REXA SERIES | Recessed or Surface Mount LED Adjustable Edge-Lit Exit Sign with Battery Back-up

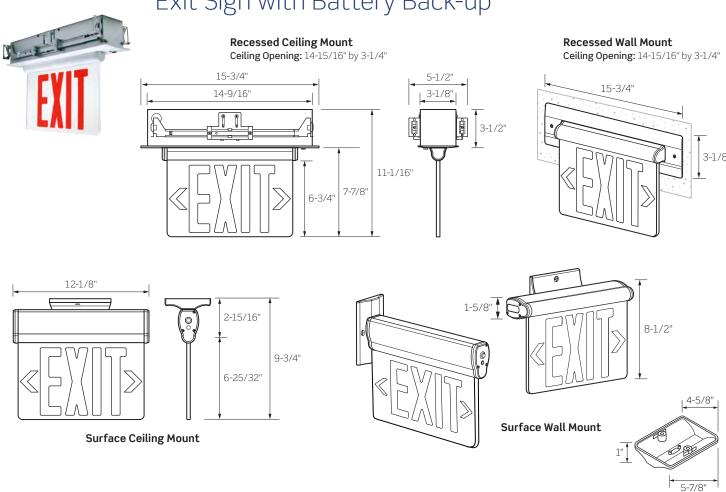

Surface Mounting Canopy

WATTAGE	3W			
ELECTRICAL	120/277 VAC Dual Voltage Operation (50/60Hz, 24mA/11mA) LED Lamps operate in Normal (AC Input) and Emergency (DC Input) Modes			
MOUNTING OPTIONS	Recessed or Surface; Ceiling, Wall or End Mount Pendant Stem Kit Available			
BATTERY	Nickel-Cadmium Battery (4.8V 300mA) Over 3 hours capacity to Emergency Lamps 24-Hour Recharge after 90-Minute Discharge Low Voltage Battery Disconnection prevents deep discharge damage to the Battery			
CCSAus Listed Damp Location	UL Listed; Suitable for Damp Locations Meets UL924 and NFPA101 UL 94V-0 Flame Rating Indoor Use Only			
WARRANTY	One (1) year replacement after date of purchase			



DATE PROJECT

CATALOG NO.


TYPE

REXA SERIES | Recessed or Surface Mount LED Adjustable Edge-Lit Exit Sign with Battery Back-up

ORDERING INFORMATION

RED LETTERING OPTIONS

Example Order: REXADFREMW-P

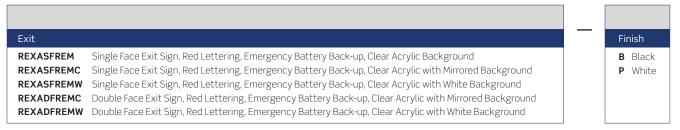

GREEN LETTERING OPTIONS


Example Order: REXASFGEMC-P



PENDANT STEM KIT ACCESSORY ORDERING INFORMATION

Example Order: REXA18INSTEM KIT-P

Accessory	Length		_	Finish
REXA Pendant Stem Kit	12IN STEM KIT 18IN STEM KIT 24IN STEM KIT 36IN STEM KIT 48IN STEM KIT	12-Inches 18-Inches 24-Inches 36-Inches 48-Inches		B Black P White S Silver



PRODUCT SPECIFICATIONS

- For New Construction, Lay-in Ceilings, or where accessibility above the Ceiling is available
- Steel Housing, Aluminum Trim Plate, Etched Acrylic Faceplate with Clear Background
- Single or Double Face configuration; letters are 6 inches high with a 3/4 inch stroke
- Removable Directional Indicators (Chevrons)
- 14-1/2-Inches by 3-1/4-Inch Ceiling cut-out for Recessed Applications
- · Adjustable Bar Hangers for suspended Ceiling Mount
- Fixture maintenance can be done from below the ceiling
- Expected LED life: up to 10 years