

RL38L-ICSA-R/RF6L1

6" Dedicated LED Remodel StopAire IC Rated Housing with LED Trim Module

Specifications/Features

Housing/Mounting

Remodel 6" housing with LED module dedicated luminaire disconnect, air-tight for insulated ceilings.

Intended for ceiling thickness from 1/2" - 1-3/4".

Aluminum and galvanized steel construction.

Housing includes male IDEAL Powerplug® model 182 luminaire connector for connection to LED trim module.

Prewired junction box with convenient screwdriver pry-outs: (5) 1/2", (1) 3/4", (1) 1/2" x 3/4" concentric and (4) Romex knockouts.

Spring-latch access plates.

Quick-connect push-in wire connectors provided. Approved for through-circuit wiring. Max: (8) #12 AWG (4 in/4 out).

Input Voltage: 120V AC

Max. wattage: 20W

LED Module

Optical acrylic diffusion lens produces high lumen transmission and even illumination.

Multiple LED chips with excellent fixture-to-fixture color consistency. 15W, 1000 Delivered Lumen output.

Available in 2700K and 3000K color temperatures, 90 CRI.

Direct 120VAC design – no driver needed, providing for a smaller, lighter design with less components.

Designed and rated for 50,000 hours at 70% lumen maintenance. LED module reflector and trim ring are integral and fabricated of heavy gage aluminum. The reflector is available in matte white or platinum haze finish. Both reflector options include the trim ring in matte white.

Nickel plated steel torsion springs secure module in housing.

Module includes female IDEAL Powerplug® model 182 luminaire connector for connection to housing.

Dimming

Triac and ELV.

Warranty

This complete fixture is covered by ConTech's full five (5) year replacement guarantee after date of purchase.

Listing



LED Module: cETLus listed to UL standards. EnergyStar certified.

Housing: cULus listed

Conforms to Washington State Energy code (WSEC) for low air infiltration. Tested in accordance with ASTM E283 (2.0CFM or less).

Approved Dimmers:

Lutron: CTCL-153P, DV-603-P, DV-CL153P, MACL-153M, SELV-300P
Leviton: 6631, 6674, VP106

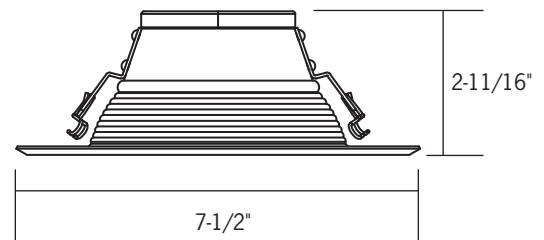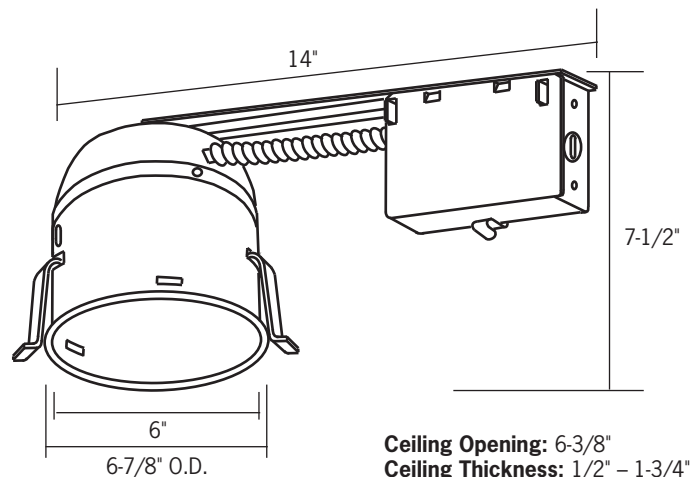

Catalog No. _____

Type _____

Project _____

RL38L-ICSA-R/RF6L1

6" Dedicated LED Remodel StopAire IC Rated Housing
with LED Trim Module

Ordering Information

Example Order:

Housing*

RL38L-ICSA-R

LED Module*

RF6L127KCE-PL - 6" 15W, 2700K, 90 CRI, Platinum Haze Reflector/White Trim Ring
RF6L127KCE-WHT - 6" 15W, 2700K, 90 CRI, White Reflector/White Trim Ring
RF6L130KCE-PL - 6" 15W, 3000K, 90 CRI, Platinum Haze Reflector/White Trim Ring
RF6L130KCE-WHT - 6" 15W, 3000K, 90 CRI, White Reflector/White Trim Ring

**NOTE: Housing and Module are ordered as separate line items*