


DATE

PROJECT

TYPE

TLPPM | Pendant Mount Performance LED Tapelight Round Extrusion Kit

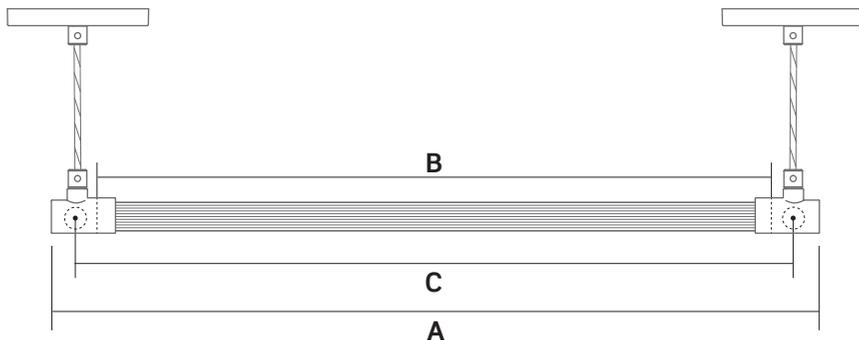

A Overall Length	B Extrusion Length	C Centered Mntg Loc
14"	12"	13"
26"	24"	25"
38"	36"	37"
50"	48"	49"
62"	60"	61"
74"	72"	73"

Sample Component Order List

- (1) Performance LED Tapelight Pendant Mount Kit
- Appropriate length of 12V or 24V Performance LED Tapelight
- (1) 12V or 24V Enclosed Hardwire Power Supply

Product Details

Features

- Create a unique Pendant Mount luminaire simply by combining this Extrusion Kit and any of ConTech's Performance LED Tapelight Series
- Not compatible with TLTO Outdoor Performance LED Tapelight or 120V Flex LED Strip Light Series
- Round extrusion can be rotated to direct illumination in any direction
- 5-Inch diameter Mounting Canopies can be mounted to 4-inch junction boxes
- Extrusion is available in 12-inch increments, up to 72"; extrusion and lens can be cut in the field

- Includes 10 Ft total length of field adjustable cords; coaxial cord supplies low voltage to the tapelight and supports the extrusion
- cCSAus Certified to UL standards
- Suitable for dry or damp locations
- Not suitable for wet locations

Warranty

- Covered by ConTech's full five (5) year replacement guarantee after date of purchase

Ordering Information

Example Order: —

Model	Lens	Extrusion Length	Finish
TLPPMR - Performance LED Tapelight Pendant Mount Kit, Round Extrusion	C - Clear F - Frosted	<i>For Total Fixture Length, Add 2 Inches</i> 12 - 12 In. 48 - 48 In. 24 - 24 In. 60 - 60 In. 36 - 36 In. 72 - 72 In.	B - Black S - Silver

Note: Performance LED Tapelight, Power Supply and Accessories to be ordered separately

DATE

PROJECT

TYPE

PERFORMANCE LED TAPELIGHT | 12V Power Supplies

12V Plug-In Power Supplies



TLP12VP24
 12V/24W Plug-and-Play Power Supply
 120VAC/12VDC. Includes AC wall plug and female power output barrel plug for easy installation.
 3-1/4" L x 1-3/4" W x 1-1/4" D
 System length: 6'
 Use with 12V Performance LED Tapelight



TLP12VP Series
 12V Plug-and-Play Power Supplies
 120VAC/12VDC. Includes AC wall plug and female power output plug for easy installation.
 4" L x 2" W x 1-1/4" D
 Use with 12V Performance LED Tapelight

TLP12VP24 - 12V/24W Plug-and-Play Power Supply **Quantity**

Power Supply/Wattage **Quantity**
TLP12VP36 - 36W, System Length 10'
TLP12VP60 - 60W, System Length 12'

12V Hardwire Power Supplies



TLP12VHW Series
 Hardwire Power Supply
 120VAC/12VDC. Includes stripped and tinned wire pigtailed on the input and output sides. **MUST BE MAINTAINED WITHIN AN ENCLOSURE THAT MEETS LOCAL BUILDING CODES AND NEC (SUPPLIED BY OTHERS).** 2' Wire leads. Class 2 recognized.
 Use with 12V Performance LED Tapelight



TLP12VHW * MV-ENC Series
 Hardwire Class 2 Constant Voltage Driver
 120 – 277VAC/12VDC Dimming and non-dimming Class 2 Constant Voltage LED Drivers. UL Listed enclosure with built-in junction boxes. No minimum load requirement. Auto-reset protection for short circuit and over-temperature. Over load protection in CC mode. 0-10V Dimming driver delivers smooth flicker free linear dimming down to 1% with most LEDs and a wide variety of compatible dimmers. Suitable for both indoor and outdoor installations.
 Use with 12V Performance LED Tapelight

TLP12VHW20 **Quantity**
 20W 12V 120VAC: 4-3/4" L x 1-3/16" W x 1" D
TLP12VHW60
 60W 12V 120VAC: 6-1/2" L x 1-3/4" W x 1-1/4" D

TLP12VHW50MV-ENC **Quantity**
 50W 12V 120-277VAC, Non-Dimming Driver
TLP12VHW50MVD2-ENC
 50W 12V 120-277VAC, 0-10V Dimming Driver



TLP12VHW * -ENC Series
 Hardwire Class 2 Enclosed Driver
 120VAC/12VDC. Dimmable Class 2 listed driver. Compact self-enclosed driver with two (2) knockouts. Auto Reset and short circuit protection. Dimmable with standard MLV/Incandescent TRIAC (leading edge) dimmers; 8W min. load required for smooth dimming.
 6-3/4" L x 2-5/8" W x 1-1/4" D
 Use with 12V Performance LED Tapelight, not to be used with RGB tapelight series.

TLP12VHW20-ENC - 20W 12V 120VAC **Quantity**
TLP12VHW60-ENC - 60W 12V 120VAC

DATE PROJECT TYPE

PERFORMANCE LED TAPELIGHT | 24V Power Supplies

24V Plug-In Power Supplies



TLP24VP Series
Plug-and-Play Power Supply
 120VAC/24VDC. Includes AC wall plug and female power output barrel plug for easy installation. Class 2 listed.
 For use with 24V LED Tapelight.

Power Supply/Wattage	Quantity
TLP24VP36 - 36W 4-1/4" L x 2" W x 1-3/8" H	
TLP24VP60 - 60W 4-1/2" L x 2" W x 1-3/8" H	
TLP24VP96 - 96W 6-1/8" L x 2-3/8" W x 1-1/2" H	

24V Hardwire Power Supplies



TLP24VHW Series
Hardwire Power Supply
 120VAC/24VDC. Includes stripped and tinned wire pigtails on the input and output sides. MUST BE MAINTAINED WITHIN AN ENCLOSURE THAT MEETS LOCAL BUILDING CODES AND NEC (SUPPLIED BY OTHERS). 1 Ft Wire leads. Class 2 recognized.
 For use with 24V LED Tapelight.



TLP24VHW * MV-ENC Series
Hardwire Class 2 Constant Voltage Driver
 120 – 277VAC/24VDC Dimming and non-dimming Class 2 Constant Voltage LED Drivers. UL Listed enclosure with built-in junction boxes. No minimum load requirement. Auto-reset protection for short circuit and over-temperature. Over load protection in CC mode. 0–10V Dimming driver delivers smooth flicker free linear dimming down to 1% with most LEDs and a wide variety of compatible dimmers.
 0–10V Driver dimming not recommended when using TW/RGB/RGBW controllers.
 For use with 24V LED Tapelight.

	Quantity
TLP24VHW20 20W 24V 120VAC: 5-3/4" L x 1-1/2" W x 1-1/4" D	
TLP24VHW60 60W 24V 120VAC: 6-1/3" L x 1-3/4" W x 1-1/4" D	
TLP24VHW96 96W 24V 120VAC: 8-3/4" L x 2-2/3" W x 1-1/2" D	



TLP24VHW * -ENC Series
Hardwire Class 2 Enclosed Driver
 120VAC/24VDC. Dimmable Class 2 listed driver. Compact self-enclosed driver with two (2) knockouts. Auto Reset and short circuit protection. Dimmable with standard MLV/ Incandescent TRIAC (Leading Edge) dimmers; 8W Min. load required for smooth dimming.
 TRIAC Driver dimming not recommended when using TW/RGB/RGBW controllers.
 For use with 24V LED Tapelight.

	Quantity
TLP24VHW60MV-ENC 60W 24V 120-277VAC, Non-Dimming Driver	
TLP24VHW60MVD2-ENC 60W 24V 120-277VAC, 0-10V Dimming Driver	
TLP24VHW96MV-ENC 96W 24V 120-277VAC, Non-Dimming Driver	
TLP24VHW96MVD2-ENC 96W 24V 120-277VAC, 0-10V Dimming Driver	

	Quantity
TLP24VHW20-ENC 20W 24V 120VAC: 6-3/4" L x 2-2/3" W x 1-1/4" D	
TLP24VHW60-ENC 60W 24V 120VAC: 6-3/4" L x 2-2/3" W x 1-1/4" D	
TLP24VHW96-ENC 96W 24V 120VAC: 6-3/4" L x 2-2/3" W x 1-1/4" D	
TLP24VHW96-ENC277V 96W 24V 277VAC: 10" L x 3" W x 3" D	



L3D0 Series
Hardwire Hi-Lume Premier Driver
 Enclosed Class 2 96W Constant Voltage Driver with dimming down to 0.1% with compatible controls. Universal 120 - 277VAC input. Output wattage range 25-96W.
 For use with 24V LED Tapelight.

	Quantity
L3D0-96W24V-U 96W 24V 120-277VAC: 5.5" W x 2" H x 10.5" L	

DATE

PROJECT

TYPE

PERFORMANCE LED TAPELIGHT | 12V & 24V Power Supply Accessories

Plug-and-Play Power Connectors



TLCEXT Series

Plug-and-Play Power Supply Extension

Includes male and female plug connectors.

Use with 12V or 24V Performance LED Tapelight

Not compatible with 24V RGBW Performance LED Tapelight series



TLCIP Series

Static Color Male Power Connector

Includes one (1) male plug connector and one (1) male flex tape connector.

Use with 12V or 24V Static Color Performance LED Tapelight

TLCEXT24 - 24 IN

TLCEXT48 - 48 IN

Quantity

TLCEXT36 - 36 IN

TLCEXT96 - 96 IN

TLCIP12 - 12 IN

TLCIP19 - 19 IN

Quantity



TLCS2

Plug-and-Play 2-Way Splitter

Includes one (1) male and two (2) female connectors. Approximately 2 Ft long.

Use with 12V or 24V Performance LED Tapelight

Not compatible with 24V RGBW Performance LED Tapelight series



TLCOP12

Static Color Female Power Connector

12 In. connector includes one (1) male plug connector and one (1) female flex tape connector.

Use with 12V or 24V Static Color Performance LED Tapelight

TLCS2 - 12V/24V Plug-and-Play 2-Way Splitter

Quantity

TLCOP - 12 Inch 12V/24V Static Color Female Power Connector

Quantity



TLCS3

Plug-and-Play 3-Way Splitter

Includes one (1) male and three (3) female connectors. Approximately 2 Ft long.

Use with 12V or 24V Performance LED Tapelight

Not compatible with 24V RGBW Performance LED Tapelight series

TLCS3 - 12V/24V Plug-and-Play 3-Way Splitter

Quantity

DATE PROJECT TYPE

PERFORMANCE LED TAPELIGHT | 12V & 24V Power Supply Accessories

Hardwire Power Connectors



TLC CF
Female Connector
6 Inch long connector includes a wire pigtail end and a female plug connector on the other end. Used to add plug and play female connector to hardwire power supplies.
Use with 12V or 24V Performance LED Tapelight



TLC IP * HW Series
Male Power Connector
Includes wire pigtail end and one (1) male flex tape connector.
Use with 12V or 24V Performance LED Tapelight

TLC CF - 12V/24V Hardwire Female Connector Quantity

TLC IP12HW - 12 IN TLC IP19HW - 19 IN Quantity
TLC IP19HW-12AWG10FT
 19 IN Connector with Additional 10 Ft 12AWG Red & Black Wires
TLC IP19HW-12AWG20FT
 19 IN Connector with Additional 20 Ft 12AWG Red & Black Wires



TLC CM
Male Connector
6 Inch long connector includes a wire pigtail end and a male plug connector on the other end. Used for easy plug in connection to plug and play power supply and wire end can be connected to RGB controller at the screw terminals.
Use with 12V or 24V Performance LED Tapelight



TLC OP12HW
Female Power Connector
12 In. connector includes wire pigtail end and one (1) female flex tape connector.
Use with 12V or 24V Performance LED Tapelight

TLC CM - 12V/24V Hardwire Male Connector Quantity

TLC OPHW - 12 IN 12V/24V Hardwire Female Power Connector Quantity

Linear Connectors



TLC M Series
Bridge Connector
Blank section used to bridge gaps where LEDs are not necessary.
Use with 12V or 24V Performance LED Tapelight



TLC X
Cross Connector
Used to connect up to four (4) TLT segments. May be cut to create 2-way "L" connection or 3-way "T" connection.
Use with 12V or 24V Performance LED Tapelight

TLC M2 - 2 IN TLC M6 - 6 IN Quantity
 TLC M12 - 12 IN

TLC X - 12V/24V Cross Connector Quantity



TLC FF
Short Female-to-Female Connector
Used to connect male tapelight ends (when tapelight is cut two male ends remain)
Use with 12V or 24V Performance LED Tapelight

TLC FF - 12V/24V Short Female-to-Female Connector Quantity