


DATE


PROJECT

TYPE

CTL806 | O2 Mini LED Track Luminares

	CTL8061	CTL8062	CTL8063
WATTAGE	10W	14W	20W
LUMEN OUTPUT ¹	1255Lm	1723Lm	2328Lm
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K, 3000K Crisp White		
CRI	83 (80min) / 90+		
BEAM	10° Spot, 28° Medium, 48° Flood		
SYSTEM RATING	50,000 Hours @ 70% Lumen Maintenance		
DRIVER INPUT WATTAGE	10W	14W	20W
DRIVER INPUT VOLTAGE	120V VAC Dimming, 50/60Hz		
DIMMING TYPE	Leading Edge (Incandescent) or Trailing Edge (ELV)		
COMPATIBILITY	CTL Units are compatible with ConTech Lighting LT/LT2 Single Circuit/Two Circuit Track Systems and Luxbeam Track Systems, as well as Juno ^{®2} Lighting Trac-Master [™] Systems HTL Units are compatible with Halo ³ Power-Trac and Lazer Track Systems LTL Units are compatible with Lightolier ⁴ Lytespan [®] Systems		
 LISTING	cCSAus Certified to UL standards on base models Suitable for dry locations DLC Listed for all models except Crisp White		
WARRANTY	Five (5) year replacement after date of purchase		

1. Lumen values are approximate, see photometric test results
 2. Juno is a registered trademark of Juno Lighting
 3. Halo is a registered trademark of Cooper Lighting
 4. Lightolier is a registered trademark of Philips Lighting

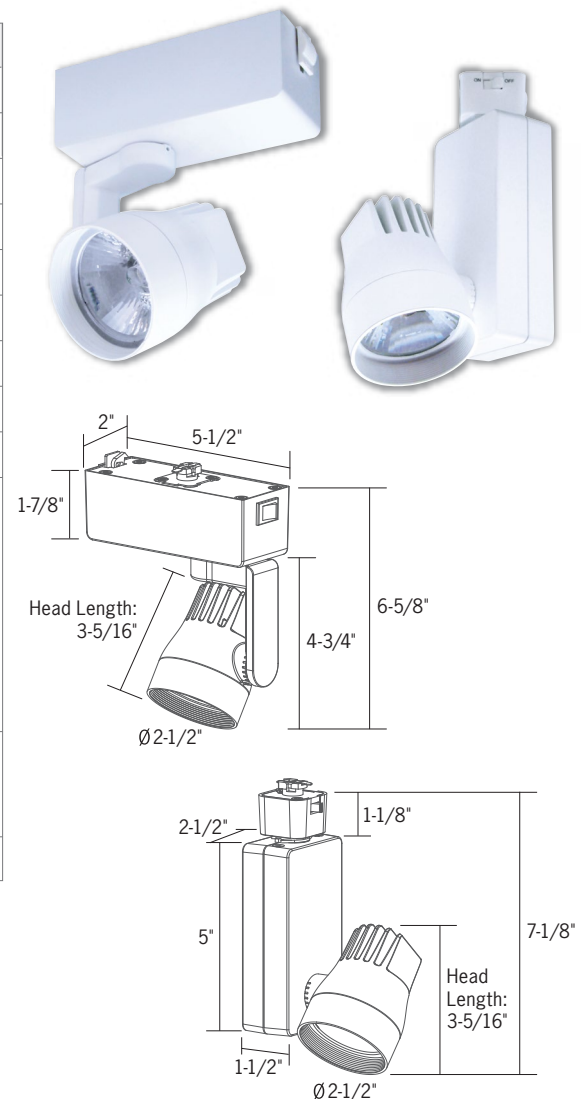

ORDERING INFORMATION

Example Order: CTL8063HS3D - P

Track System	Luminaire	Orientation	Beam	Color Temp/CRI	Driver Option	Finish
CTL - ConTech	8061 - 10W 1255Lm	H - Horizontal V - Vertical	S - 10° Spot M - 28° Medium F - 48° Flood	83 (80min) CRI 27 - 2700K 3 - 3000K 35 - 3500K 4 - 4000K	90+ CRI 27C - 2700K 3C - 3000K 35C - 3500K 4C - 4000K 3W - 3000K, Crisp White	B - Black P - White S - Silver
HTL - Halo	8062 - 14W 1723Lm					
LTL - Lightolier	8063 - 20W 2328Lm					

Accessories on Page 2

DATE

PROJECT

TYPE

CTL806 | O2 Mini LED Track Luminaires

ACCESSORY ORDERING INFORMATION

Accessories

- 5500011** - 2" Diffusion Disc
- BD16A** - Barn Doors
- FA-16 60MM** - 2-3/8" Dia. Black Honeycomb Louver
- FA-43-(B,P,S)** - 1" Snoot/Accessory Holder
- LF16-**-60MM** - 2-3/8" Dia. Tempered Glass Lenses;
Requires FA-43 Snoot/Accessory Holder

Replacement Optics

- CTL806-OPTIC-S** - 2" TIR Optic, Spot Beam
- CTL806-OPTIC-M** - 2" TIR Optic, Medium Beam
- CTL806-OPTIC-F** - 2" TIR Optic, Flood Beam

**Color/Pattern Legend

-73 (Spread Lens), -LS (Linear Spread Lens), -SL (Soft Light), -SOL (Solite), -UV (Optivex UV Filter),
-A (Amber), -B (Blue), -CL (Clear), -DPE (Dichroic Peach), -G (Green), -LB (Light Blue), -R (Red), -RO (Rose), -Y (Yellow)

PRODUCT DETAIL

Construction

- Constructed of die-cast aluminum, heat-sink and driver housing providing a sleek modern look
- Lockable, precision aiming adjustment:
Vertical Housing: 360°+ aiming horizontal rotation, 315°+ vertical rotation; head may be aimed straight upward
Horizontal Housing: 360°+ aiming horizontal rotation and 90° vertical rotation, 250° vertical rotation, 35° upward tilt (both directions)
- Integral ON/OFF switch and track polarity indicator are standard
- Can accept up to (2) LF16 60MM lens or FA-16 60MM Black Honeycomb Louvers when used with the FA-43 Snoot/Accessory Holder, ordered separately

Performance Summary

- High performance, small scale LED track luminaire
- Available in 10° Spot, 28° Medium and 48° Flood beam distributions; optics have been optically engineered to provide a smooth uniform beam, maximizing output and minimizing glare
- Optics can be easily changed in the field for optimal flexibility
- Select from 2700K, 3000K, 3500K and 4000K color temperatures; CRI 80 min., 83 typical; high CRI 90+ available
- A 3000K Crisp White LED is available, delivering 90+ color rendering with additional violet wavelengths that enhance white visibility
- Excellent fixture-to-fixture color consistency within a 2-step MacAdam Ellipse tolerance
- Dimming is standard for all wattage options and allows smooth illumination down to 10% for dimmer compatibility, refer to Dimming Specifications sheet

Fixture Compatibility

- Standard ConTech track luminaires (CTL Units) are cCSAus certified as-is for use with ConTech Lighting LT/LT2 Single Circuit/Two Circuit Track Systems and Luxbeam Track Systems, as well as Juno^{®1} Lighting Trac-Master[™] Systems.
- By changing the prefix in the part number, ConTech can install inserts which make our fixtures compatible with other manufacturers. Replace "CTL" with "HTL" for Halo^{®2} Power-Trac and Lazer-Track systems, and "LTL" for Lightolier³ Lytespan[™] systems. For more information, please consult factory.

1. Juno is a registered trademark of Juno Lighting
2. Halo is a registered trademark of Cooper Lighting
3. Lightolier is a registered trademark of Philips Lighting

DATE PROJECT TYPE



CTL806 | O2 Mini LED Track Luminaires

PHOTOMETRICS

CTL8063HS3D

Fixture Delivered Lumens: 2237.12
Total Watts@120V: 19.905
Lumens Per Watt: 112.418
Center Beam Candle Power: 17279
Beam Distribution: 10.24°
Spacing Criterion: 0.2893
Color Rendering Index (CRI)¹: 82.9
Color Temperature (CCT)²: 3071K
Designed for 50,000 Hour Lamp Life³
LM-63 Test No. G24012603
LM-79 Test No. S24012901



Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIAMETER (FT.)
4'	1079.9	0.72
6'	480.0	1.08
8'	270.0	1.43
10'	172.8	1.79
12'	120.0	2.15
14'	88.2	2.51

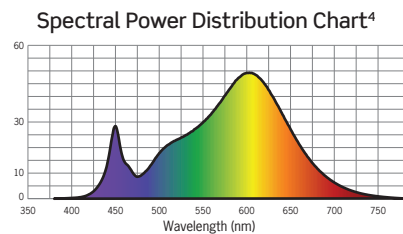

CTL8063HM3D

Fixture Delivered Lumens: 2327.82
Total Watts@120V: 19.914
Lumens Per Watt: 116.976
Center Beam Candle Power: 8558
Beam Distribution: 28.34°
Spacing Criterion: 0.4765
Color Rendering Index (CRI)¹: 82.9
Color Temperature (CCT)²: 3071K
Designed for 50,000 Hour Lamp Life³
LM-63 Test No. G24012604
LM-79 Test No. S24012901



Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIAMETER (FT.)
4'	534.9	2.02
6'	237.7	3.03
8'	133.7	4.04
10'	85.6	5.05
12'	59.4	6.06
14'	43.7	7.07

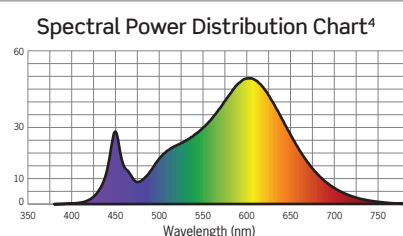

CTL8063HF3D

Fixture Delivered Lumens: 2293.43
Total Watts@120V: 19.9
Lumens Per Watt: 115.248
Center Beam Candle Power: 3802
Beam Distribution: 47.56°
Spacing Criterion: 0.7051
Color Rendering Index (CRI)¹: 82.9
Color Temperature (CCT)²: 3071K
Designed for 50,000 Hour Lamp Life³
LM-63 Test No. G24012605
LM-79 Test No. S24012901

Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIAMETER (FT.)
4'	237.6	3.53
6'	105.6	5.29
8'	59.4	7.05
10'	38.0	8.81
12'	26.4	10.58
14'	19.4	12.34

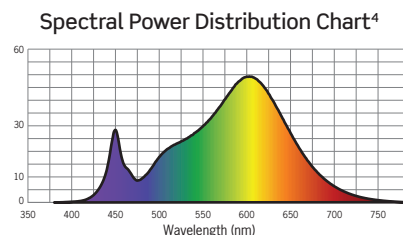

1. Accuracy of rendering colors 2. Color appearance of light source 3. Dependent on surrounding temperatures 4. Colors present within the light source

PHOTOMETRIC MULTIPLICATION FACTORS

Lumen output values fluctuate based on Color Temperature and Luminaire Wattage/Output. To estimate lumen output of these various options, multiply 3000K results by the following:

CCT MULTIPLIERS				OUTPUT MULTIPLIERS	
CCT	STD CRI	HIGH CRI	CRISP WHITE	10W/SERIES 1	14W/SERIES 2
2700K	.949	.842	N/A	0.539	0.74
3000K	N/A	.872	.488		
3500K	1.02	.895	N/A		
4000K	1.04	.916	N/A		

DATE

PROJECT


TYPE

CTL806 | O2 Mini LED Track Luminaires

PHOTOMETRICS

TM-30 Data: CTL8063HM3D

ANSI/IES TM-30-18 Color Rendition Report Test No. S24012901

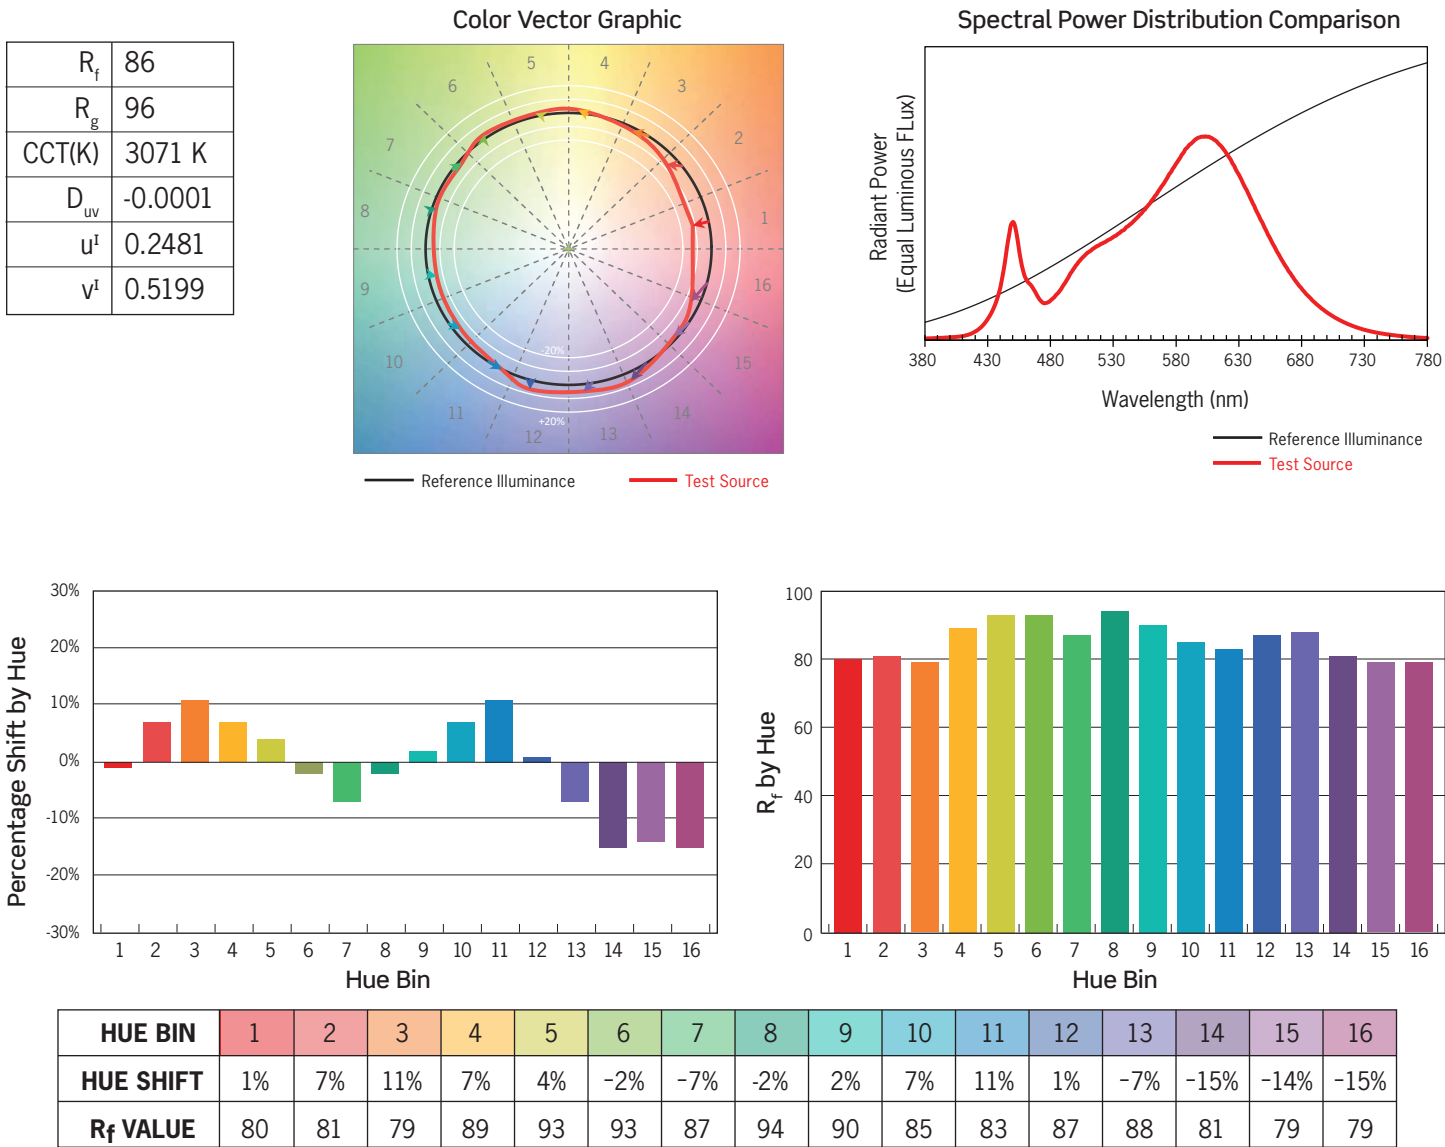

Colors are for visual orientation purposes only


DATE

PROJECT

TYPE

DIMMING SPECIFICATIONS | CTL806 Series LED Luminaires

- Incandescent 120VAC dimmers adjust the light with “forward phase control,” where the dimmer “chops” the forward part of the AC wave to deliver less or more power to the light source. No neutral wire connection required.
- Electronic low voltage 120VAC dimmers adjust the light with “reverse phase control,” where the dimmer “chops” the back part of the AC wave to deliver less or more power to the light source. Neutral wire connection required.

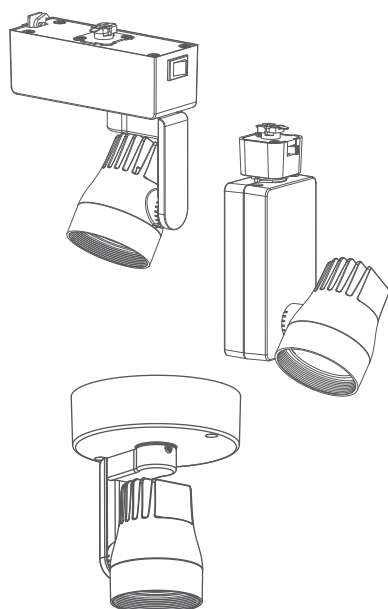

		CTL806 Series: “D” Driver Option		
		Light Output		
Manufacturer	Model	10W	14W	20W
Leviton	6631-2	1% - 100%	1% - 100%	1% - 100%
Leviton	6633-P	1% - 100%	0% - 100%	2% - 100%
Leviton	IPI06-1LZ	1% - 100%	N/A	2% - 100%
Leviton	6683-IW	4% - 100%	4% - 100%	6% - 100%
Leviton	IPE04	6% - 100%	6% - 100%	8% - 100%
Leviton	VPE06	9% - 100%	10% - 100%	11% - 100%
Cooper	SLC03P	1% - 100%	0% - 100%	0% - 100%
Cooper	DAL06P	1% - 100%	1% - 100%	0% - 100%
Cooper	DLC03P	1% - 100%	1% - 100%	2% - 100%
Lightolier	ZP260QEW	7% - 100%	8% - 100%	N/A
Lutron	DVCL-153P	0% - 100%	3% - 100%	1% - 100%
Lutron	S600P	1% - 100%	1% - 100%	4% - 100%
Lutron	TGCL-153P	5% - 100%	4% - 100%	6% - 100%
Lutron	S-603PG	4% - 96%	4% - 91%	7% - 96%
Lutron	DV600P	5% - 100%	0% - 100%	8% - 100%
Lutron	LG600P	5% - 100%	5% - 100%	8% - 100%
Lutron	DVELV303P	6% - 100%	7% - 100%	8% - 100%
Lutron	SELV300P	7% - 100%	7% - 100%	8% - 100%
Lutron	CT103P	9% - 100%	9% - 100%	12% - 100%
Lutron	MAELV600	12% - 100%	11% - 100%	14% - 100%
Lutron	FAELV500	12% - 100%	12% - 100%	14% - 100%
Lutron	TG-600P	13% - 100%	11% - 100%	15% - 100%

Notes

1. Testing was performed with a single fixture connected to dimmer.
2. Testing has been performed on these dimmers, but this does not imply any warranty of compatibility.
3. Dimming performance can be influenced by different loads, as well as variations in dimmer switches within the same model.
4. Dimmer maximum load rating with LED may differ from published traditional source dimmer ratings. Consult manufacturer for maximum dimmer information.
5. Consult factory for additional dimming information.