



CY3 AW SERIES | 3-1/2-Inch Round Indoor/Outdoor Cylinders: ADA Compliant Wall Mount




Wall Mount

Tall Wall Mount


Wall Mount Luminaires may be installed
in the Up or Down orientation

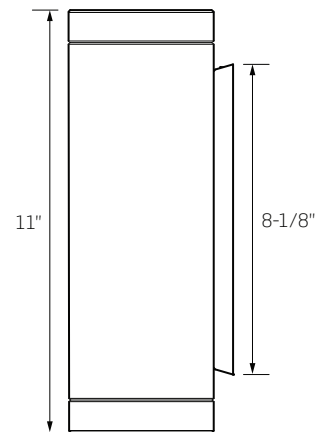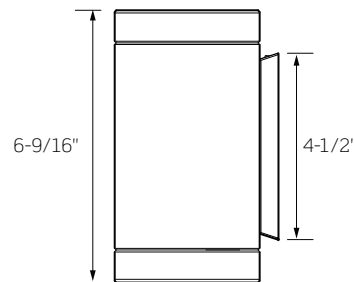


Top View: Indoor/Outdoor



Bottom View: Indoor



Bottom View: Outdoor



cCSAus
Listed



Damp
Location



Wet
Location



IP65
Rated



ADA
Compliant

	CY3S1/CY3T1	CY3S2/CY3T2	CY3S3/CY3T3
WATTAGE	10W	14W	20W
LUMEN OUTPUT ¹	1200Lm	1653Lm	2286Lm
COLOR TEMPERATURE	2700K / 3000K / 3500K / 4000K		
CRI	83 (80min) / 90+		
BEAM	13° Spot / 29° Medium / 44° Flood / 60° Wide Flood / Wall Wash		
LUMINAIRE HEIGHT	6-1/2-Inches (Short) / 11-Inches (Tall)		
FINISHES	Matte Black / Satin Bronze / Matte White / Matte Silver / Custom Colors Available		
DRIVER INPUT WATTAGE	10W	14W	20W
DRIVER INPUT VOLTAGE	120V – 277V Dimming, 50/60Hz		
DIMMING TYPE	120V Forward/Reverse Phase 120V – 277V 0–10V Lutron HiLume™ EcoSystem®		
LISTINGS	cCSAus Certified for use in the U.S. and Canada; Suitable for Damp/Dry or Wet locations Wet Location Cylinders feature a Silicone Sealed Clear Glass Lens in a Gasketed Die-Cast Trim Ring to ensure unit is watertight; IP65 Rating for Wet Location Models Cylinders must be installed per specific product installation instructions and all appropriate NEC Codes		
WARRANTY	Five (5) year replacement after date of purchase		
SYSTEM RATING	50,000 Hours @ 70% Lumen Maintenance		

1. Approximate lumen output based on 3000K performance; see photometric test results for additional information


CY3 AW SERIES | 3-1/2-Inch Round Indoor/Outdoor Cylinders: ADA Compliant Wall Mount

ORDERING INFORMATION

Example Order: CY3230K12D1WXM-P

Cyl. Height	LED Series	CCT/CRI	Driver/Dimming	Mounting	Mntg Location	Beam	Finish
CY3S 6-1/2"	1 10W/ 1200lm	83 (80min) CRI 27K 2700K	12D1 120V Forward or Reverse Phase	AW ADA Compliant <i>May be installed in the Up or Down orientation</i>	Leave Blank for Interior/ Dry/Damp Locations	S 13° Spot	B Matte Black
CY3T² 11"	2 14W/ 1653lm	30K 3000K	MVD2 120V-277V 0-10V Dimming			M 29° Medium	BZ Satin Bronze
	3 20W/ 2286lm	35K 3500K 40K 4000K	MVD4³ Lutron HiLume™ 1% EcoSystem® Driver with Soft-On, Fade-to-Black		X Exterior/Wet Locations	F 44° Flood WF 60° Wide Flood WW⁴ Wall Wash	P Matte White
		90 CRI 27KC 2700K 30KC 3000K 35KC 3500K 40KC 4000K					S Matte Silver
							CC⁵ Custom Color

Battery and Remote Enclosure⁶
None, Leave Blank
RDB Remote Driver & Battery Pack
RD Remote Driver Enclosure

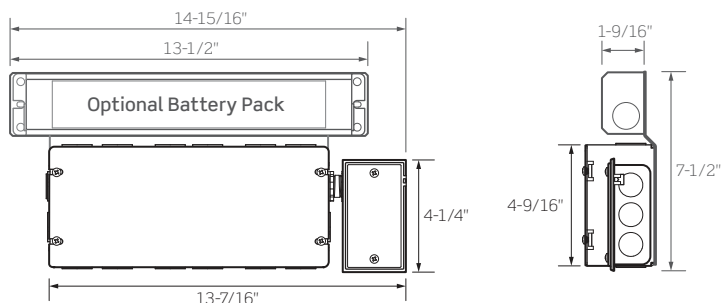

RDB: Remote Driver & Battery Pack
Battery Flexible Conduit Whips
Not Pictured
RD: Remote Driver Enclosure

- Tall (T) Housings require use of Remote Driver Enclosure option (RDB or RD)
- Lutron HiLume Drivers must use Remote Driver Enclosure (RD Option)
- Wall Wash Optic (WW) is not field interchangeable with Spot, Medium, Flood and Wide Flood Optics
- Custom Color finishes available; consult factory for pricing, minimum order quantities and lead time
- For Wet Location Cylinders ordered with RD/RDB Remote Enclosures, the RD/RDB Enclosure **must** be mounted in Dry/Damp Locations and the Cylinder Luminaire may be mounted in Wet Locations

ACCESSORY ORDERING INFORMATION

REPLACEMENT OPTICS

Optic
CY3-OPTIC-S 13° Spot Beam
CY3-OPTIC-M 29° Medium Beam
CY3-OPTIC-F 44° Flood Beam
CY3-OPTIC-WF 60° Wide Flood Beam

Spot (S), Medium (M), Flood (F), and Wide Flood (WF) Optics are not interchangeable with Wall Wash (WW) options

ACCESSORIES

Accessory
FA-47 Accessory Holder
FA-16 60MM 2-3/8-In. Dia. Black Honeycomb Louver; Requires FA-47 Accessory Holder

TEMPERED GLASS LENSES

Lens	Finish
LF16	73 Spread Lens LS Linear Spread SL Soft Light SOL Solite CL Clear A Amber B Blue DPE Dichroic Peach G Green LB Light Blue R Red RO Rose Y Yellow

Example Order: LF16-A-60MM

Size
60MM 2-3/8-Inch Diameter Tempered Glass Lenses and Filters: 1/8-Inch Thick, typical Requires FA-47 Accessory Holder

CY3 AW SERIES | 3-1/2-Inch Round Indoor/Outdoor Cylinders: ADA Compliant Wall Mount

PRODUCT SPECIFICATIONS

CONSTRUCTION

- Specification Grade 3-1/2-inch diameter Aluminum Housing for indoor and outdoor ADA Compliant applications
- Available in 6-1/2- and 11-inch heights; both are 4-inches deep
- Suitable for Dry/Damp (indoor) or Wet (outdoor) location types
- Wet Location Cylinders feature a Polycarbonate Screw-In Lens and O-Ring to ensure the unit is watertight
- May be installed in the Up or Down orientation

PERFORMANCE SUMMARY

- Available in 13° Spot, 29° Medium, 44° Flood and 60° Wide Flood Beam Distributions, as well as a Wall Wash option
- Wall Wash Optic may be rotated 360° to aim distribution pattern
- Optics have been optically engineered to provide a smooth uniform beam, maximizing output and minimizing glare

- Optics can be easily changed in the field for optimal flexibility; Wall Wash Optic (WW) is not field interchangeable with Spot, Medium, Flood or Wide Flood Optics
- Select from 2700K, 3000K, 3500K and 4000K Color Temperatures; each with a CRI of 80 min., 83 typical; high CRI of 90+ available
- Excellent fixture-to-fixture color consistency within a 3-step MacAdam Ellipse tolerance
- Battery Backup option provides 90 minutes of power
- UL8750 and Class 2 compliant: RoHS compliant, U.S. only
- Output over voltage, over current and short circuit protected
- CY3 Cylinders are available for non-dimming and dimming applications

DIMMING SPECIFICATIONS

- Incandescent 120VAC Dimmers adjust the light with Forward Phase Control, where the Dimmer “chops” the forward part of the AC Wave to deliver less or more power to the light source; no neutral wire connection required
- Electronic Low Voltage 120VAC Dimmers adjust the light with Reverse Phase Control, where the Dimmer “chops” the back part of the AC Wave to deliver less or more power to the light source; neutral wire connection required
- 0-10V DC Low Voltage Dimmers operate using two (2) Low Voltage Dimming Wires that are separate from the 120V or 277V AC power. The Dimmer sends a variable output voltage to the luminaire based upon the dimming level. 10V Corresponds to undimmed operation, 5V to 50% and so on. Switching on/off is controlled with the line voltage power input (120V or 277V AC) to the Dimmer, and then dimming operation is controlled with the 0-10V DC Low Voltage Wiring Connection between the Dimmer and the Driver. The Control Signal runs on two (2) Low Voltage Control Wires color coded violet and pink (or gray).
- Lutron EcoSystem Drivers provide continuous dimming from 1%-100%; for a complete list of compatible Dimmers and Controls, please visit www.lutron.com

Dimming Option 12D1 or MVD2			
Manufacturer	Product	Model	Light Output
Leviton	IlumaTech	IPI06-1LZ	1%-100%
Leviton	SureSlide	6631-2	1%-100%
Leviton	Vizia	VPE06	9%-100%
Leviton	Trimatron	6683-IW	4%-100%
Leviton	Decora	6161	15%-100%
Leviton	SureSlide	6633-P	0%-100%
Leviton	IlumaTech	IPE04	6%-100%
Leviton	IlumaTech	IP710-DLX	N/A
Lutron	Ariadni	TGCL153P	4%-100%
Lutron	Ariadni	TG-600P	11%-100%
Lutron	Diva	DVCL153P	0%-100%
Lutron	Diva	DV600P	0%-100%
Lutron	Diva	DVELV303P	6%-100%
Lutron	Diva	DVTV	N/A
Lutron	Faedra	FAELV500	12%-100%

Dimming Option 12D1 or MVD2			
Manufacturer	Product	Model	Light Output
Lutron	Lumea	LG600P	5%-100%
Lutron	Maestro	MAELV600	11%-100%
Lutron	Nova	NFTV	N/A
Lutron	Nova T	NTFTV	N/A
Lutron	Skylark	S-603PG	4%-96%
Lutron	Skylark	S600P	1%-100%
Lutron	Skylark	SELV300P	7%-100%
Lutron	Skylark	CT103P	9%-100%
Pass & Seymour	Titan	CD4FB-W	N/A
Watt Stopper	Miro Decorator	DCLV1	N/A
Synergy		ISD BC	N/A
Cooper	Devine	DLC03P	1%-100%
Cooper	Skye	SLC03P	0%-100%
Cooper	Decorator	DAL06P	0%-100%

*277V Phase Dimming is not available

NOTES

1. Testing was performed with a single fixture connected to dimmer.
2. Testing has been performed on these dimmers, but this does not imply any warranty of compatibility.
3. Dimming performance can be influenced by different loads, as well as variations in dimmer switches within the same model.
4. Dimmer maximum load rating with LED may differ from published traditional source dimmer ratings. Consult manufacturer for maximum dimmer information.
5. Consult factory for additional dimming information.

CY3 SERIES | 3-1/2-Inch Round Indoor/Outdoor Cylinders: Photometry

CY3S330K12D1CS: 3000K SPOT


LM-63 Test No. G24020204; LM-79 Test No. S24020101

Fixture Delivered Lumens: 2197.22
Total Watts@120V: 19.679
Lumens Per Watt: 111.534
Center Beam Candle Power: 14522
Beam Distribution: 12.54°
Spacing Criterion: 0.3135
Color Rendering Index (CRI)¹: 83
Color Temperature (CCT)²: 3101K
Designed for 50,000 Hour Lamp Life³


Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	907.6	0.88
6 FT	403.4	1.32
8 FT	226.9	1.76
10 FT	145.2	2.20
12 FT	100.8	2.64
14 FT	74.1	3.08

Candela Curve



Spectral Power Distribution Chart⁴

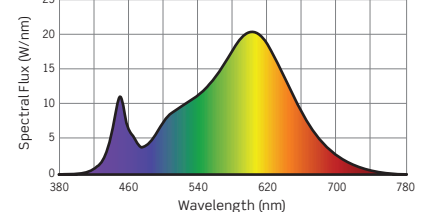

CY3S330K12D1CM: 3000K MEDIUM


LM-63 Test No. G24020203; LM-79 Test No. S24020101

Fixture Delivered Lumens: 2285.87
Total Watts@120V: 19.672
Lumens Per Watt: 116.034
Center Beam Candle Power: 8583
Beam Distribution: 29.28°
Spacing Criterion: 0.4628
Color Rendering Index (CRI)¹: 83
Color Temperature (CCT)²: 3101K
Designed for 50,000 Hour Lamp Life³


Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	536.4	2.09
6 FT	238.4	3.13
8 FT	134.1	4.18
10 FT	85.8	5.22
12 FT	59.6	6.24
14 FT	43.8	7.31

Candela Curve



Spectral Power Distribution Chart⁴

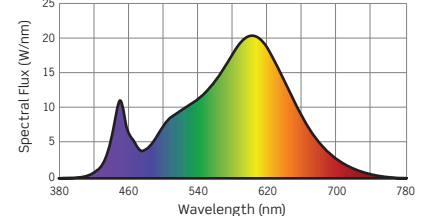

CY3S330K12D1CF: 3000K FLOOD


LM-63 Test No. G24020205; LM-79 Test No. S24020101

Fixture Delivered Lumens: 2263.94
Total Watts@120V: 19.675
Lumens Per Watt: 114.921
Center Beam Candle Power: 4311
Beam Distribution: 43.77°
Spacing Criterion: 0.6604
Color Rendering Index (CRI)¹: 83
Color Temperature (CCT)²: 3101K
Designed for 50,000 Hour Lamp Life³


Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	269.4	3.21
6 FT	119.7	4.82
8 FT	67.4	6.43
10 FT	43.1	8.03
12 FT	29.9	9.64
14 FT	22.0	11.25

Candela Curve



Spectral Power Distribution Chart⁴

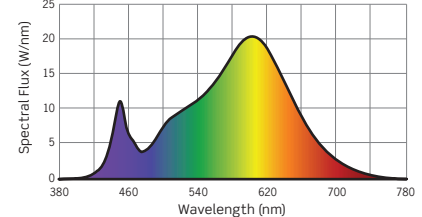

1. Accuracy of Rendering Colors 2. Color Appearance of Light Source 3. Dependent on Surrounding Temperatures 4. Colors Present within the Light Source

PHOTOMETRIC MULTIPLICATION FACTORS

Lumen output values fluctuate based on CCT. To estimate lumen output of the various CCT/CRI options, multiply 3000K (80 CRI min) results by the following:

CCT MULTIPLIERS		
CCT	STANDARD CRI	HIGH (90+) CRI
2700K	0.949	0.842
3000K	1.00	0.872
3500K	1.02	0.895
4000K	1.04	0.916

OUTPUT MULTIPLIERS		
10W	14W	WET LOCATION OPTION
0.525	0.723	0.922

CY3 SERIES | 3-1/2-Inch Round Indoor/Outdoor Cylinders: Photometry

CY3S330K12D1CWF: 3000K WIDE FLOOD


LM-63 Test No. G24020206; LM-79 Test No. S24020101

Fixture Delivered Lumens: 1854.25
Total Watts@120V: 19.675
Lumens Per Watt: 94.1245
Center Beam Candle Power: 1876
Beam Distribution: 59.89°
Spacing Criterion: 0.882
Color Rendering Index (CRI)¹: 83
Color Temperature (CCT)²: 3101K
Designed for 50,000 Hour Lamp Life³


Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	117.2	4.61
6 FT	52.1	6.91
8 FT	29.3	9.22
10 FT	18.8	11.52
12 FT	13.0	13.83
14 FT	9.6	16.13

Candela Curve



Spectral Power Distribution Chart⁴

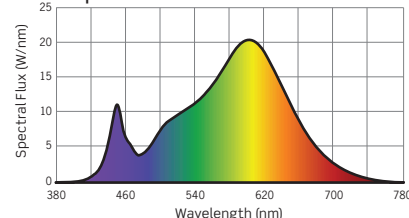

CY3S330K12D1CWW: 3000K WALL WASH


LM-63 Test No. G24020203; LM-79 Test No. S24020101

Fixture Delivered Lumens: 997.225
Total Watts@120V: 19.718
Lumens Per Watt: 50.6206
Center Beam Candle Power: 927
Beam Distribution: 50.35°
Spacing Criterion: 0.8078
Color Rendering Index (CRI)¹: 83
Color Temperature (CCT)²: 3101K
Designed for 50,000 Hour Lamp Life³


Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	57.9	4.08
6 FT	25.7	6.08
8 FT	14.5	8.11
10 FT	9.3	10.14
12 FT	6.4	12.16
14 FT	4.7	14.19

Candela Curve



Spectral Power Distribution Chart⁴

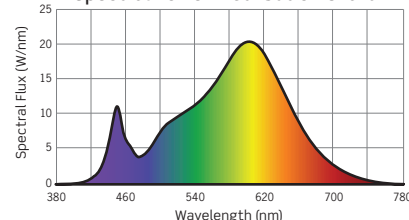

1. Accuracy of Rendering Colors 2. Color Appearance of Light Source 3. Dependent on Surrounding Temperatures 4. Colors Present within the Light Source

PHOTOMETRIC MULTIPLICATION FACTORS

Lumen output values fluctuate based on CCT. To estimate lumen output of the various CCT/CRI options, multiply 3000K (80 CRI min) results by the following:

CCT MULTIPLIERS		
CCT	STANDARD CRI	HIGH (90+) CRI
2700K	0.949	0.842
3000K	1.00	0.872
3500K	1.02	0.895
4000K	1.04	0.916

OUTPUT MULTIPLIERS		
10W	14W	WET LOCATION OPTION
0.525	0.723	0.922

BUG RATINGS

Not valid for Wall Mount (W) when oriented as an Uplight

REFLECTOR					
	SPOT	MEDIUM	FLOOD	WIDE FLOOD	WALL WASH ⁷
10W	B1 U0 G0	B1 U0 G0	B1 U0 G0	B1 U0 G0	B0 U0 G0
14W	B1 U0 G0	B1 U0 G0	B1 U0 G0	B1 U0 G0	B1 U0 G0
20W	B2 U0 G0	B2 U0 G0	B2 U0 G0	B2 U0 G0	B0 U0 G0

7. Wall Wash Rating based on Reflector used as Forward Throw


CY3 SERIES | 3-1/2-Inch Round Indoor/Outdoor Cylinders: Photometry

TM-30 DATA for CY3S330K12D1CM: 3000K, MEDIUM BEAM




ANSI/IES TM-30-18 Color Rendition Report Test No. S24020101

R_i	86
R_g	96
CCT(K)	3101K
D_{uv}	-0.0002
u^l	0.2470
v^l	0.5196

Color Vector Graphic

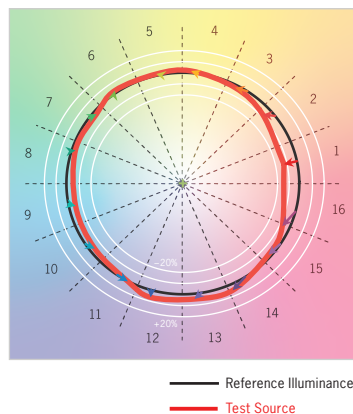

Spectral Power Distribution Comparison

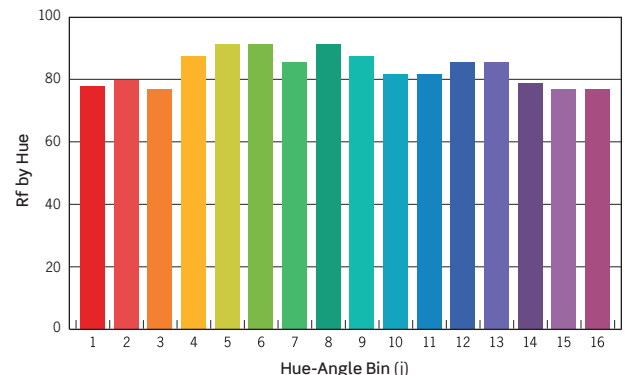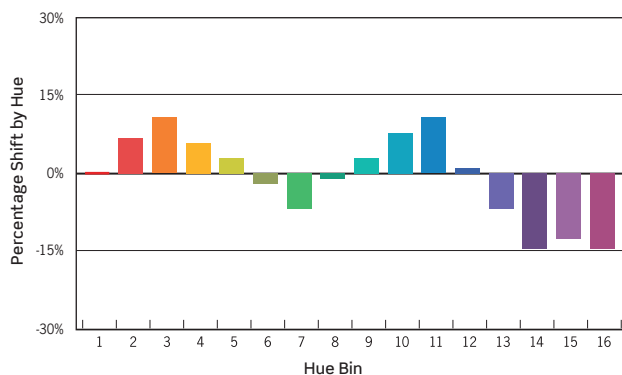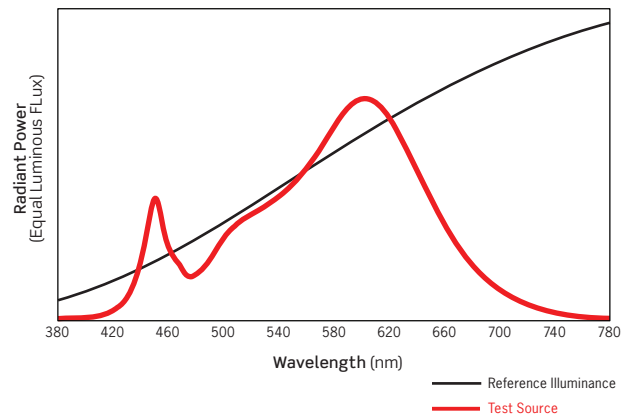

HUE BIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
HUE SHIFT	0%	7%	11%	6%	3%	-2%	-7%	-1%	3%	8%	11%	1%	-7%	-15%	-13%	-15%
R _f VALUE	80	82	79	90	94	94	88	94	90	84	84	88	88	81	79	79

Colors are for visual orientation purposes only