


CYL6 SERIES | 6-Inch Round Indoor/Outdoor Cylinders: Wall Mount

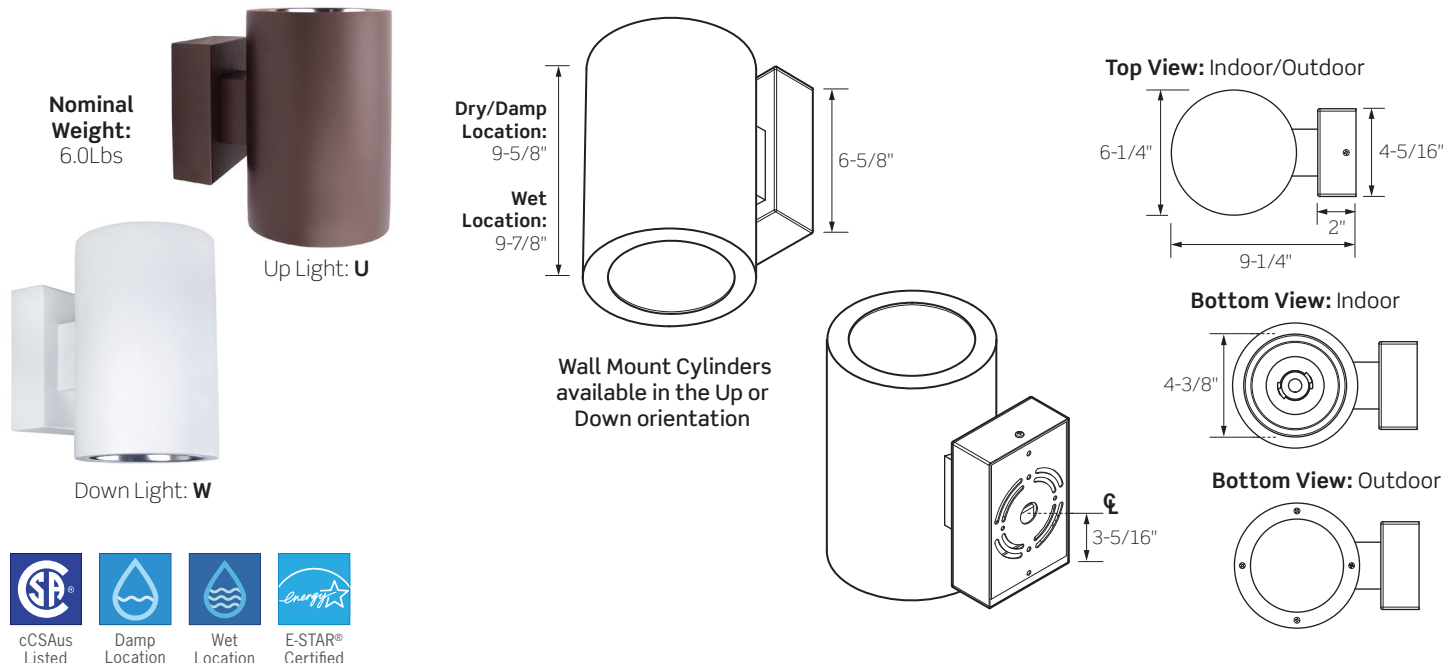

	CYL61	CYL62	CYL63	CYL64	CYL65	CYL66
WATTAGE	10W	14W	20W	28W	36W	43W
LUMEN OUTPUT ¹	1220Lm	1685Lm	2300Lm	3100Lm	3850Lm	4350Lm
COLOR TEMPERATURE	2700K / 3000K / 3500K / 4000K					
CRI	83 (80min) / 90+					
REFLECTOR BEAM	36° / 54° / 63° / 80° / Wall Wash / Pencil Beam					
REFLECTOR FINISHES	Clear Alzak (Narrow, Medium, Wide) / Platinum (Medium)					
CYLINDER FINISHES	Matte Black / Satin Bronze / Matte White / Matte Silver / Custom Colors Available					
DRIVER INPUT WATTAGE	10W	14W	20W	28W	36W	43W
INPUT CURRENT (A) 120V/277V	.08/.04	.12/.06	.17/.08	.23/.11	.31/.14	.36/.16
INPUT VOLTAGE/DIMMING TYPE	Standard Driver (Phase/0-10V) 120VAC/277VAC/347VAC, 50/60Hz					
Lutron Eco-System® Driver	120VAC/277VAC, 50/60Hz				N/A	N/A
eldoLED ECOdrive/SOLOdrive	120VAC/277VAC, 50/60Hz					
DIMMING RANGE	Standard Driver (Phase/0-10V) 10-100%					
Lutron Eco-System® Driver	1-100%					
eldoLED ECOdrive/SOLOdrive	0.1-100%					
DRIVER POWER FACTOR	> 0.90					
TOTAL HARMONIC DISTORTION	< 20%					
LISTINGS	cCSAus Certified for use in the U.S. and Canada; Suitable for Damp/Dry or Wet locations Wet Location Models have a Silicone Sealed Clear Glass Lens in a Gasketed Die-Cast Trim Ring to ensure unit is watertight ENERGY STAR® Certified; Pencil Beam and Wall Wash options are not ENERGY STAR® Certified All models must be installed per specific product installation instructions and all appropriate National Electrical Codes					
WARRANTY	Five (5) year replacement after date of purchase					
SYSTEM RATING	50,000 Hours @ 70% Lumen Maintenance					

1. Approximate lumen output based on 3000K performance; see photometric test results for additional information


CYL6 SERIES | 6-Inch Round Indoor/Outdoor Cylinders: Wall Mount

ORDERING INFORMATION

Example Order: CYL6127KMVD4WXNCLR-BZ

Cylinder	CCT/CRI	Driver/Dimming	Mounting	Mntg Location	Reflector
CYL61 10W/1220lm CYL62 14W/1685lm CYL63 20W/2300lm CYL64 28W/3100lm CYL65 36W/3850lm CYL66 43W/4350lm	83 (80min) CRI 27K 2700K 30K 3000K 35K 3500K 40K 4000K 90 CRI 27KC 2700K 30KC 3000K 35KC 3500K 40KC 4000K	Driver Availability Matrix Below MVD 120V-277V Forward/Reverse Phase / 0-10V Dimming 34D2 347V 0-10V Dimming MVD4² Lutron Hi-lume 1% EcoSystem Driver with Soft-on, Fade-to-Black MVD6 eldoLED ECOdrive 0-10V, 1% Dimming MVD7 eldoLED ECOdrive DALI, 1% Dimming MVD8 eldoLED SOLOdrive 0-10V, 0.1% Dimming MVD9 eldoLED SOLOdrive DALI, 0.1% Dimming MDMX eldoLED POWERdrive DMX <1% Dimming	W Down Light Wall Mount U Up Light Wall Mount	Leave Blank for Interior/ Dry/Damp Locations X Exterior/Wet Locations	Clear Alzak NCLR 36° Narrow MCLR 54° Medium WCLR 80° Wide PL 63° Platinum WW Wall Wash PB³ Pencil Beam

Finish	Battery and Remote Enclosure ⁵
B Matte Black BZ Satin Bronze P Matte White S Matte Silver CC⁴ Custom Color	None, Leave Blank RDB⁶ Remote Driver & Battery Pack RD⁶ Remote Driver Enclosure

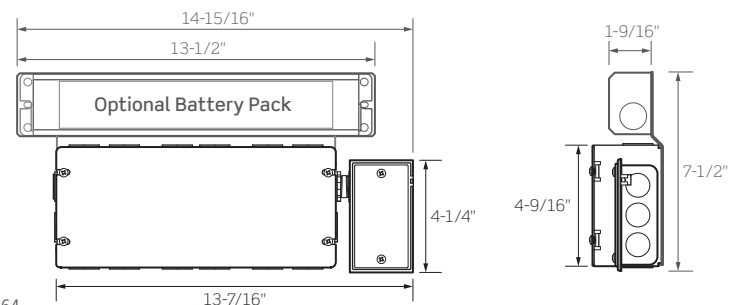

- Lutron Dimming Option MVD4 Hi-lume 1% EcoSystem LED Driver is available for CYL61 through CYL64 luminaires only (10W through 28W); not available for use with CYL65 or CYL66 (36W or 43W) Luminaires
- Pencil Beam (PB) Optic limited to Exterior Mount ("X" Mounting option) locations
- Custom finish colors available; consult factory for pricing, minimum order quantities and lead time
- For Wet Location Cylinders ordered with RD/RDB Remote Enclosures, the RD/RDB Enclosure **must** be mounted in Dry/Damp Locations and the Cylinder Luminaire may be mounted in Wet Locations
- RDB and RD Options cannot be used with Lutron Hi-lume Dimming (MVD4 Option) in CYL65 or CYL66 (36W or 43W) Luminaires

RDB: Remote Driver & Battery Pack
 Battery Flexible Conduit Whips Not Pictured
 RD: Remote Driver Enclosure

DRIVER AVAILABILITY MATRIX

Highest wattage option for each Driver/Dimmer type that will fit inside the luminaire;

Driver sizes that do not fit inside the luminaire may be ordered with a Remote Driver Housing (RD), unless otherwise noted with additional restrictions.

Driver/Dimming	Max Wattage	Driver/Dimming	Max Wattage
MVD: 120V-277V Forward/Reverse Phase	Any Wattage	MVD8: eldoLED SOLODrive 0-10V	Any Wattage
MVD4²: Lutron Hi-lume 1% EcoSystem	Up to 28W / CYL64	MVD9: eldoLED SOLODrive DALI	Any Wattage
MVD6: eldoLED ECODrive 0-10V	Any Wattage	MDMX: eldoLED POWERdrive DMX	Any Wattage
MVD7: eldoLED ECODrive DALI	Any Wattage	34D2: 347V 0-10V	Any Wattage

BUG RATINGS

Not valid for Wall Mount (W) when oriented as an Uplight

	REFLECTOR					
	NARROW	MEDIUM	WIDE	PLATINUM	WALL WASH ⁷	PENCIL BEAM
10W	B1 U0 G0	B1 U0 G0	B1 U0 G1	B1 U0 G1	B0 U0 G0	B0 U0 G0
14W	B1 U0 G0	B2 U0 G0	B2 U0 G0	B2 U0 G0	B0 U0 G0	B0 U0 G0
20W	B1 U0 G0	B2 U0 G0	B2 U0 G0	B2 U0 G0	B0 U0 G0	B0 U0 G0
28W	B1 U0 G0	B2 U0 G0	B2 U0 G0	B2 U0 G0	B0 U0 G0	B0 U0 G0
36W	B2 U0 G0	B3 U0 G0	B3 U0 G1	B3 U0 G1	B1 U0 G0	B0 U0 G0
43W	B2 U0 G0	B3 U0 G0	B3 U0 G1	B3 U0 G1	B1 U0 G0	B0 U0 G0

7. Wall Wash Rating based on Reflector used as Forward Throw

CYL6 SERIES | 6-Inch Round Indoor/Outdoor Cylinders: Wall Mount

PRODUCT SPECIFICATIONS

CONSTRUCTION

- Specification Grade 6-inch diameter aluminum housing; suitable for Dry/Damp (indoor) or Wet (outdoor) location types
- Wet Location Cylinders feature a Silicone Sealed Clear Glass Lens in a Gasketed Die-Cast Trim Ring to ensure unit is watertight
- Bracket Support for hands-free wiring
- Available in Up or Down mounting orientation; specific mounting style must ordered from factory

PERFORMANCE SUMMARY

- Clear Alzak Reflector is available in 36° Narrow, 54° Medium and 80° Wide beam distributions
- Platinum Reflector is available in a 63° Medium beam distribution

- Wall Wash and Pencil Beam Optic accessories are also available
- Select from 2700K, 3000K, 3500K and 4000K Color Temperatures; CRI of 80 min., 83 typical; high CRI of 90+ available
- Excellent fixture-to-fixture color consistency within a 3-step MacAdam Ellipse tolerance
- Battery Backup option provides 90 minutes of power
- UL8750 and Class 2 compliant: RoHS compliant, U.S. only
- Output over voltage, over current and short circuit protected
- CYL6 Cylinders are available for non-dimming and dimming applications; for dimmer compatibility, see below

DIMMING SPECIFICATIONS

Manufacturer	Product	Model	MVD Dimming Option 120V-277V Phase 7/0-10V Dimming	MVD6 Dimming Option 120V-277V eldoLED ECOdrive 0-10V, 1% Dimming	MVD8 Dimming Option 120V-277V eldoLED SOLOdrive 0-10V, 0.1% Dimming
			Light Output	Light Output	Light Output
Leviton	IllumaTech	IPI06-1LZ	1%-100%	N/A	N/A
Leviton	SureSlide	6631-2	1%-100%	N/A	N/A
Leviton	Vizia	VPE06	9%-100%	N/A	N/A
Leviton	Trimatron	6683-IW	6%-100%	N/A	N/A
Leviton	Decora	6161	15%-100%	N/A	N/A
Leviton	SureSlide	6633-P	1%-100%	N/A	N/A
Leviton	IllumaTech	IPE04	6%-100%	N/A	N/A
Leviton	IllumaTech	IP710-DLX	N/A	1%-100%	0.1%-100%
Cooper	Devine	DLC03P	1%-100%	N/A	N/A
Cooper	Skye	SLC03P	0%-100%	N/A	N/A
Cooper	Decorator	DAL06P	0%-100%	N/A	N/A
Pass & Seymour	Titan	CD4FB-W	N/A	1%-100%	0.1%-100%
Synergy		ISD BC	N/A	1%-100%	0.1%-100%
Watt Stopper	Miro Decorator	DCLV1	N/A	1%-100%	0.1%-100%
Lutron	Ariadni	TGCL-153P	1%-100%	N/A	N/A
Lutron	Ariadni	TG-600P	13%-100%	N/A	N/A
Lutron	Diva	DVCL-153P	1%-100%	N/A	N/A
Lutron	Diva	DV600P	6%-100%	N/A	N/A
Lutron	Diva	DVELV303P	6%-100%	N/A	N/A
Lutron	Diva	DVTV	N/A	1%-100%	0.1%-100%
Lutron	Faedra	FAELV500	12%-100%	N/A	N/A
Lutron	Lumea	LG600P	8%-100%	N/A	N/A
Lutron	Maestro	MAELV600	16%-100%	N/A	N/A
Lutron	Nova	NFTV	N/A	1%-100%	0.1%-100%
Lutron	Nova T	NTFTV	N/A	1%-100%	0.1%-100%
Lutron	Skylark	S-603PG	5%-96%	N/A	N/A
Lutron	Skylark	S600P	5%-100%	N/A	N/A
Lutron	Skylark	SELV300P	10%-100%	N/A	N/A
Lutron	Skylark	CT103P	9%-100%	N/A	N/A

7. 277V Phase Dimming is not available

- Incandescent 120VAC Dimmers adjust the light with forward phase control, no neutral wire connection required
- Electronic Low Voltage 120VAC Dimmers adjust the light with reverse phase control, neutral wire connection required
- 0-10V DC Low Voltage Dimmers operate using two (2) low voltage dimming wires that are separate from the 120V or 277V AC power. Switching on/off is controlled with the Line Voltage Power Input (120V or 277V AC) to the Dimmer, Dimming Operation is controlled with the 0-10V DC Low Voltage Wiring Connection between the Dimmer and the Driver. The Control Signal runs on two (2) Low Voltage Control Wires - a violet and a pink (or gray).
- Lutron EcoSystem Drivers provide continuous dimming from 1%-100%; for a complete list of compatible dimmers and controls, please visit www.lutron.com
- Use DALI approved Controls for dimming options MVD7 (eldoLED ECOdrive) and MVD9 (eldoLED SOLOdrive)

NOTES

1. Testing was performed with a single fixture connected to dimmer.
2. Testing has been performed on these dimmers, but this does not imply any warranty of compatibility.
3. Dimming performance can be influenced by different loads, as well as variations in dimmer switches within the same model.
4. Dimmer maximum load rating with LED may differ from published traditional source dimmer ratings. Consult manufacturer for maximum dimmer information.
5. Consult factory for additional dimming information.

CYL6 SERIES | 6-Inch Round Indoor/Outdoor Cylinders: Photometry

CYL6630KMVDCNCLR: 3000K CLEAR NARROW


LM-63 Test No. G21080504; LM-79 Test No. S21081101

Fixture Delivered Lumens: 4301.9
Total Watts@120V: 42.3
Lumens Per Watt: 101.7
Center Beam Candle Power: 7111
Beam Distribution: 35.7°
Spacing Criterion: 0.64
Color Rendering Index (CRI)¹: 83.6
Color Temperature (CCT)²: 3086K
Designed for 50,000 Hour Lamp Life³


Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	444.5	2.6
6 FT	197.5	3.9
8 FT	111.1	5.1
10 FT	71.1	6.4
12 FT	49.4	7.7
14 FT	36.3	9.0

Candela Curve



Spectral Power Distribution Chart⁴

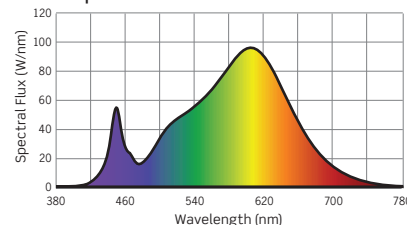

CYL6630KMVDCMCLR: 3000K CLEAR MEDIUM


LM-63 Test No. G21080502; LM-79 Test No. S21081101

Fixture Delivered Lumens: 4348.9
Total Watts@120V: 42.3
Lumens Per Watt: 102.8
Center Beam Candle Power: 6032
Beam Distribution: 53.3°
Spacing Criterion: 0.80
Color Rendering Index (CRI)¹: 83.6
Color Temperature (CCT)²: 3086K
Designed for 50,000 Hour Lamp Life³


Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	377.0	4.0
6 FT	167.6	6.0
8 FT	94.2	8.0
10 FT	60.3	10.1
12 FT	41.9	12.1
14 FT	30.8	14.1

Candela Curve



Spectral Power Distribution Chart⁴

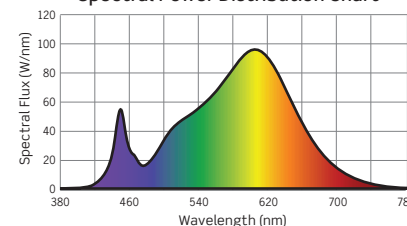

CYL6630KMVDCWCLR: 3000K CLEAR WIDE


LM-63 Test No. G21080601; LM-79 Test No. S21081101

Fixture Delivered Lumens: 4153.7
Total Watts@120V: 42.3
Lumens Per Watt: 98.2
Center Beam Candle Power: 2367
Beam Distribution: 79.9°
Spacing Criterion: 1.20
Color Rendering Index (CRI)¹: 83.6
Color Temperature (CCT)²: 3086K
Designed for 50,000 Hour Lamp Life³


Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	147.9	6.7
6 FT	65.7	10.1
8 FT	37.0	13.4
10 FT	23.7	16.8
12 FT	16.4	20.1
14 FT	12.1	23.5

Candela Curve



Spectral Power Distribution Chart⁴

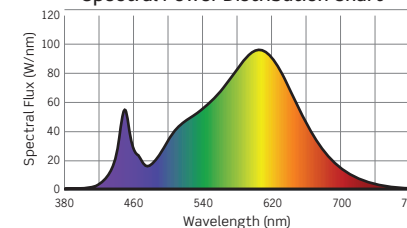

1. Accuracy of Rendering Colors 2. Color Appearance of Light Source 3. Dependent on Surrounding Temperatures 4. Colors Present within the Light Source

PHOTOMETRIC MULTIPLICATION FACTORS

Lumen output values fluctuate based on CCT. To estimate lumen output of the various CCT/CRI options, multiply 3000K (80 CRI min) results by the following:

CCT MULTIPLIERS		
CCT	STANDARD CRI	HIGH (90+) CRI
2700K	0.94	0.70
3000K	1.00	0.75
3500K	1.00	0.81
4000K	1.00	0.87

OUTPUT MULTIPLIERS				
10W SERIES 1	14W SERIES 2	20W SERIES 3	28W SERIES 4	36W SERIES 5
0.28	0.39	0.53	0.72	0.89

CYL6 SERIES | 6-Inch Round Indoor/Outdoor Cylinders: Photometry

CYL6630KMVDCPL: 3000K MEDIUM PLATINUM


LM-63 Test No. G21080602; LM-79 Test No. S21081101

Fixture Delivered Lumens: 3801.8
Total Watts@120V: 42.3
Lumens Per Watt: 89.9
Center Beam Candle Power: 4413
Beam Distribution: 63.0°
Spacing Criterion: 0.93
Color Rendering Index (CRI)¹: 83.6
Color Temperature (CCT)²: 3086K
Designed for 50,000 Hour Lamp Life³


Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	275.8	4.9
6 FT	122.6	7.4
8 FT	69.0	9.8
10 FT	44.1	12.2
12 FT	30.6	14.7
14 FT	22.5	17.1

Candela Curve



Spectral Power Distribution Chart⁴

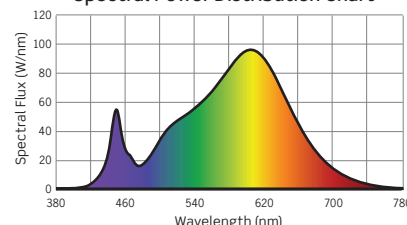

CYL6630KMVDCWW: 3000K WALL WASH


LM-63 Test No. G210806.3; LM-79 Test No. S21081101

Fixture Delivered Lumens: 1900.3
Total Watts@120V: 42.0
Lumens Per Watt: 45.2
Center Beam Candle Power: 1820
Beam Distribution: Wall Wash
Spacing Criterion: 0.83
Color Rendering Index (CRI)¹: 83.6
Color Temperature (CCT)²: 3086K
Designed for 50,000 Hour Lamp Life³


Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	113.8	3.8
6 FT	50.6	5.7
8 FT	28.4	7.7
10 FT	18.2	9.6
12 FT	12.6	11.5
14 FT	9.3	13.4

Candela Curve



Spectral Power Distribution Chart⁴

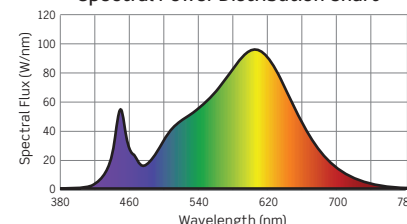

CYL6630KMVDCXPB: 3000K PENCIL BEAM


LM-63 Test No. G21080901; LM-79 Test No. S21081101

Fixture Delivered Lumens: 291.2
Total Watts@120V: 42.0
Lumens Per Watt: 6.9
Center Beam Candle Power: 766
Beam Distribution: 9°
Spacing Criterion: 0.94
Color Rendering Index (CRI)¹: 83.6
Color Temperature (CCT)²: 3086K
Designed for 50,000 Hour Lamp Life³


Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	47.9	3.5
6 FT	21.3	5.3
8 FT	12.0	7.1
10 FT	7.7	8.8
12 FT	5.3	10.6
14 FT	3.9	12.4

Candela Curve



Spectral Power Distribution Chart⁴

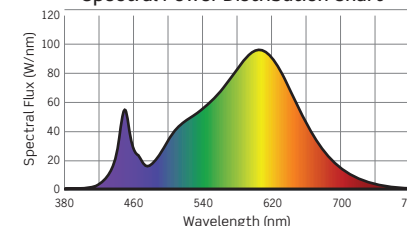

1. Accuracy of Rendering Colors 2. Color Appearance of Light Source 3. Dependent on Surrounding Temperatures 4. Colors Present within the Light Source

PHOTOMETRIC MULTIPLICATION FACTORS

Lumen output values fluctuate based on CCT. To estimate lumen output of the various CCT/CRI options, multiply 3000K (80 CRI min) results by the following:

CCT MULTIPLIERS		
CCT	STANDARD CRI	HIGH (90+) CRI
2700K	0.94	0.70
3000K	1.00	0.75
3500K	1.00	0.81
4000K	1.00	0.87





OUTPUT MULTIPLIERS				
10W SERIES 1	14W SERIES 2	20W SERIES 3	28W SERIES 4	36W SERIES 5
0.28	0.39	0.53	0.72	0.89

CYL6 SERIES | 6-Inch Round Indoor/Outdoor Cylinders: Photometry

TM-30 DATA for CYL6630KMVDCMCLR: 3000K, CLEAR MEDIUM

ANSI/IES TM-30-18 Color Rendition Report Test No. S21081101

R_f	86
R_g	97
CCT(K)	3086K
D_{uv}	0.0017
u^I	0.2470
v^I	0.5220

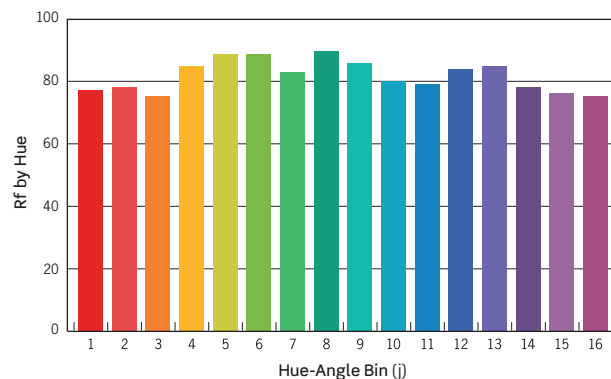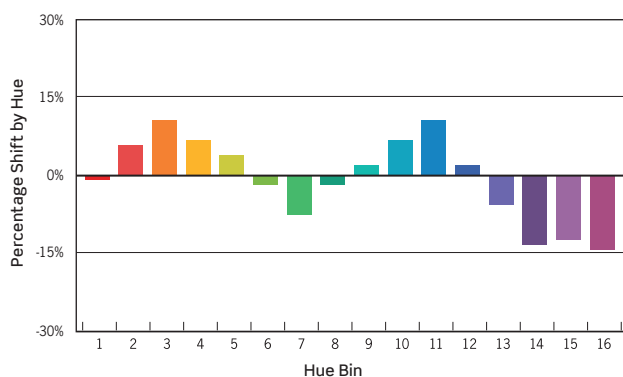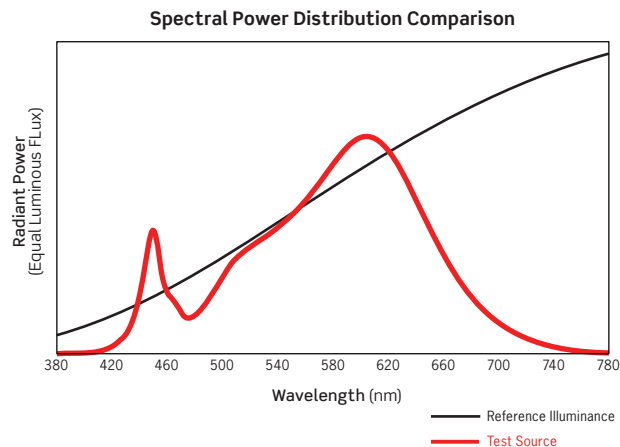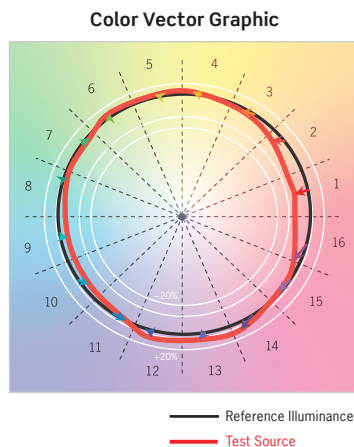

HUE BIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
HUE SHIFT	-1%	6%	10%	7%	4%	-2%	-7%	-2%	2%	7%	11%	2%	-6%	-14%	-13%	-15%
R _f VALUE	81	83	80	89	93	93	88	94	91	84	83	88	89	82	80	80

Colors are for visual orientation purposes only