



CYL8 SERIES | 8-Inch Round Indoor Cylinders: Track Mount Flexible Cable Pendant

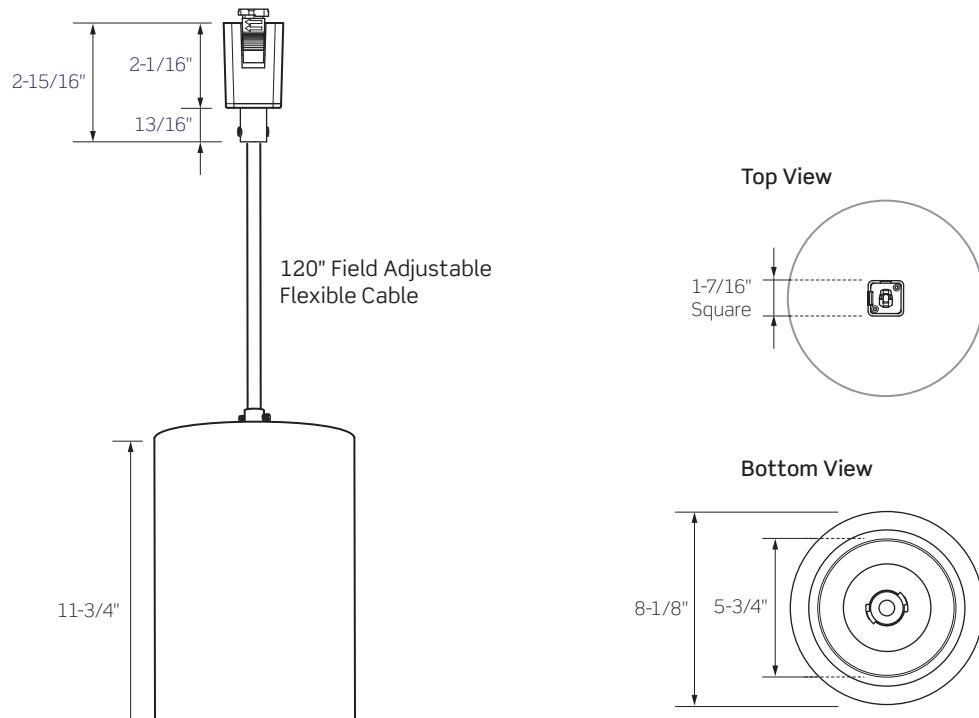

Nominal Weight:
8.0Lbs

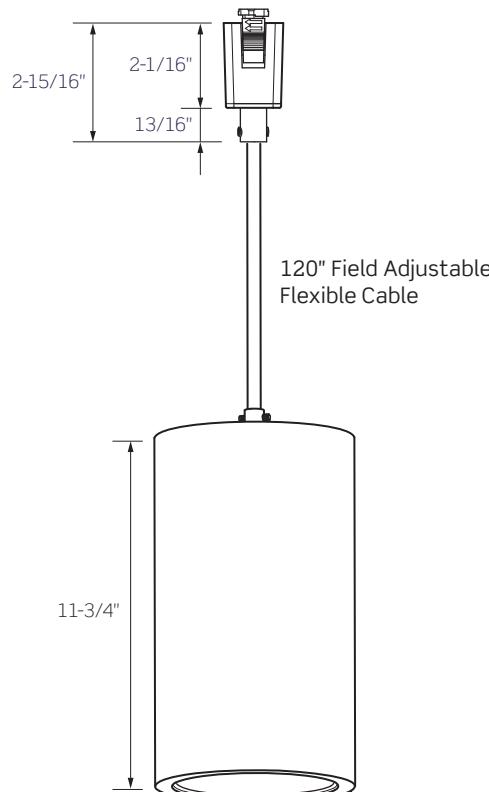

	CYL81	CYL82	CYL83	CYL84	CYL85	CYL86
WATTAGE	10W	14W	20W	28W	36W	43W
LUMEN OUTPUT ¹	1246Lm	1736Lm	2359Lm	3204Lm	3961Lm	4450Lm
COLOR TEMPERATURE	2700K / 3000K / 3500K / 4000K					
CRI	83 (80min) / 90+					
REFLECTOR BEAM	34° / 66° / 69° / 75° / Wall Wash					
REFLECTOR FINISHES	Clear Alzak (Narrow, Medium, Wide) / Platinum (Medium)					
CYLINDER FINISHES	Matte Black / Satin Bronze / Matte White / Matte Silver / Custom Colors Available					
DRIVER INPUT WATTAGE	10W	14W	20W	28W	36W	43W
INPUT CURRENT (A) 120V/277V	.08	.12	.17	.23	.31	.36
INPUT VOLTAGE/DIMMING TYPE	120VAC/277VAC, 50/60Hz/Phase Dimming					
DIMMING RANGE	10-100%					
DRIVER POWER FACTOR	> 0.90					
TOTAL HARMONIC DISTORTION	< 20%					
LISTINGS	cCSAus Certified for use in the U.S. and Canada; Suitable for Damp/Dry locations ENERGY STAR® Certified; Wall Wash option is not ENERGY STAR® Certified All models must be installed per specific product installation instructions and all appropriate National Electrical Codes					
WARRANTY	Five (5) year replacement after date of purchase					
SYSTEM RATING	50,000 Hours @ 70% Lumen Maintenance					

1. Approximate lumen output based on 3000K performance; see photometric test results for additional information

CYL8 SERIES | 8-Inch Round Indoor Cylinders: Track Mount Flexible Cable Pendant

ORDERING INFORMATION

Example Order: CYL8127KMVD4TFCNCLR-S

Cylinder/LED Series	CCT/CRI	Driver/Dimming	Mounting	Reflector Beam	Finish
CYL81 10W / 1246lm	83 (80min) CRI	90+ CRI	12D1 120V	TFC Flexible Cable	NCLR 34° Narrow, Clear Alzak
CYL82 14W / 1736lm	27K 2700K	27KC 2700K	Forward / Reverse		BZ Matte Black
CYL83 20W / 2359lm	30K 3000K	30KC 3000K	Phase Dimming		BZ Satin Bronze
CYL84 28W / 3204lm	35K 3500K	35KC 3500K			P Matte White
CYL85 36W / 3961lm	40K 4000K	40KC 4000K			S² Matte Silver
CYL86 43W / 4450lm					CC³ Custom Color

2. Satin Bronze Finish (BZ) comes with Black Track Adapter

3. Custom Finish colors available; consult factory for pricing, minimum order quantities and lead time

PRODUCT SPECIFICATIONS

CONSTRUCTION

- Specification Grade 8-inch diameter aluminum housing; suitable for Dry/Damp (indoor) location types
- Includes 120-inches of Field Adjustable 18/3 SJTOW Cable
- Black Flexible Cable with Black or Bronze Cylinders, White Flexible Cable with White Cylinders and Gray Flexible Cable with Silver Cylinders

PERFORMANCE SUMMARY

- Clear Alzak Reflector is available in 34° Narrow, 66° Medium and 75° Wide beam distributions
- Platinum Reflector is available in a 69° Medium beam distribution
- Wall Wash Optic also available

- Select from 2700K, 3000K, 3500K and 4000K Color Temperatures; CRI of 80 min., 83 typical; high CRI of 90+ available
- Excellent fixture-to-fixture color consistency within a 3-step MacAdam Ellipse tolerance
- Battery Backup option provides 90 minutes of power
- UL8750 and Class 2 compliant: RoHS compliant, U.S. only
- Output over voltage, over current and short circuit protected
- CYL8 Cylinders are available for non-dimming and dimming applications; for dimmer compatibility, refer to Dimming Specification sheet

BUG RATINGS

Not valid for Wall Mount (W) when oriented as an Uplight

REFLECTOR						
	NARROW	MEDIUM	WIDE	PLATINUM	WALL WASH ⁷	PENCIL BEAM
10W	B1 U0 G0	B1 U0 G0	B1 U0 G1	B1 U0 G1	B0 U0 G0	B0 U0 G0
14W	B1 U0 G0	B2 U0 G0	B2 U0 G0	B2 U0 G0	B0 U0 G0	B0 U0 G0
20W	B1 U0 G0	B2 U0 G0	B2 U0 G0	B2 U0 G0	B0 U0 G0	B0 U0 G0
28W	B1 U0 G0	B2 U0 G0	B2 U0 G0	B2 U0 G0	B0 U0 G0	B0 U0 G0
36W	B2 U0 G0	B3 U0 G0	B3 U0 G1	B3 U0 G1	B1 U0 G0	B0 U0 G0
43W	B2 U0 G0	B3 U0 G0	B3 U0 G1	B3 U0 G1	B1 U0 G0	B0 U0 G0

7. Wall Wash Rating based on Reflector used as Forward Throw



ConTech

DATE

PROJECT

TYPE

CATALOG NO.



CYL8 SERIES | 8-Inch Round Indoor/Outdoor Cylinders: Photometry

CYL8630K MVDCNCLR: 3000K CLEAR NARROW

LM-63 Test No. G21080903; LM-79 Test No. S21081102

Fixture Delivered Lumens: 4450.1
 Total Watts@120V: 42.2
 Lumens Per Watt: 105.5
 Center Beam Candle Power: 11108
 Beam Distribution: 32.4°
 Spacing Criterion: 0.53
 Color Rendering Index (CRI)¹: 83.3
 Color Temperature (CCT)²: 3079K
 Designed for 50,000 Hour Lamp Life³

Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	694.2	2.3
6 FT	308.6	3.5
8 FT	173.6	4.7
10 FT	111.1	5.8
12 FT	77.1	7.0
14 FT	56.7	8.1

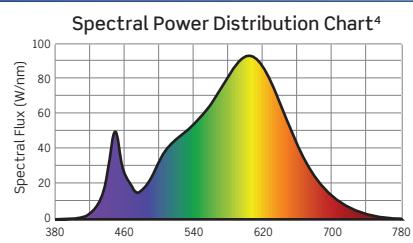



CYL8630K MVDCMCLR: 3000K CLEAR MEDIUM

LM-63 Test No. G21080902; LM-79 Test No. S21081102

Fixture Delivered Lumens: 4336.5
 Total Watts@120V: 42.2
 Lumens Per Watt: 102.8
 Center Beam Candle Power: 4641
 Beam Distribution: 63.4°
 Spacing Criterion: 0.93
 Color Rendering Index (CRI)¹: 83.3
 Color Temperature (CCT)²: 3079K
 Designed for 50,000 Hour Lamp Life³

Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	290.1	5.0
6 FT	128.9	7.4
8 FT	72.5	9.9
10 FT	46.4	12.4
12 FT	32.2	15.0
14 FT	23.7	17.3

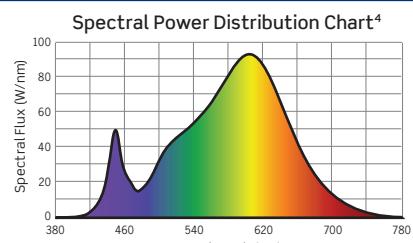



CYL8630K MVDCWCLR: 3000K CLEAR WIDE

LM-63 Test No. G21080904; LM-79 Test No. S21081102

Fixture Delivered Lumens: 4417.0
 Total Watts@120V: 42.2
 Lumens Per Watt: 104.7
 Center Beam Candle Power: 2409
 Beam Distribution: 79.8°
 Spacing Criterion: 1.10
 Color Rendering Index (CRI)¹: 83.3
 Color Temperature (CCT)²: 3079K
 Designed for 50,000 Hour Lamp Life³

Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	150.6	6.0
6 FT	66.9	9.1
8 FT	37.6	12.1
10 FT	24.1	15.1
12 FT	16.7	18.1
14 FT	12.3	21.1

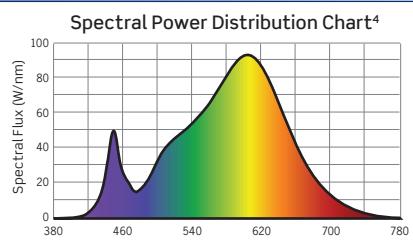

1. Accuracy of Rendering Colors 2. Color Appearance of Light Source 3. Dependent on Surrounding Temperatures 4. Colors Present within the Light Source

PHOTOMETRIC MULTIPLICATION FACTORS

Lumen output values fluctuate based on CCT. To estimate lumen output of the various CCT/CRI options, multiply 3000K (80 CRI min) results by the following:

CCT MULTIPLIERS		
CCT	STANDARD CRI	HIGH (90+) CRI
2700K	0.94	0.70
3000K	1.00	0.75
3500K	1.00	0.81
4000K	1.00	0.87

OUTPUT MULTIPLIERS				
10W SERIES 1	14W SERIES 2	20W SERIES 3	28W SERIES 4	36W SERIES 5
0.28	0.39	0.53	0.72	0.89



CYL8 SERIES | 8-Inch Round Indoor/Outdoor Cylinders: Photometry

CYL8630K MVDCPL: 3000K MEDIUM PLATINUM

LM-63 Test No. G21080905; LM-79 Test No. S21081102

Fixture Delivered Lumens: 3891.4
 Total Watts@120V: 42.2
 Lumens Per Watt: 92.2
 Center Beam Candle Power: 4116
 Beam Distribution: 68.4°
 Spacing Criterion: 0.99
 Color Rendering Index (CRI)¹: 83.3
 Color Temperature (CCT)²: 3079K
 Designed for 50,000 Hour Lamp Life³

Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	257.2	5.4
6 FT	114.3	8.2
8 FT	64.3	10.9
10 FT	41.2	13.6
12 FT	28.6	16.3
14 FT	21.0	19.0

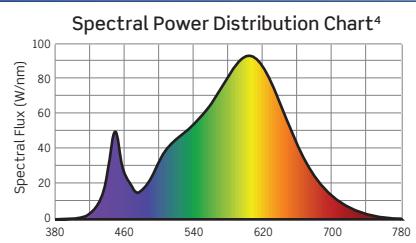



CYL8630K MVDCWW: 3000K WALL WASH

LM-63 Test No. G21081001; LM-79 Test No. S21081102

Fixture Delivered Lumens: 2512.5
 Total Watts@120V: 42.4
 Lumens Per Watt: 59.3
 Center Beam Candle Power: 3297
 Beam Distribution: 41.4° x 44.6°
 Spacing Criterion: 0.65
 Color Rendering Index (CRI)¹: 83.3
 Color Temperature (CCT)²: 3079K
 Designed for 50,000 Hour Lamp Life³

Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	206.1	3.1
6 FT	91.6	4.7
8 FT	51.5	6.2
10 FT	33.0	7.8
12 FT	22.9	9.3
14 FT	16.8	10.9

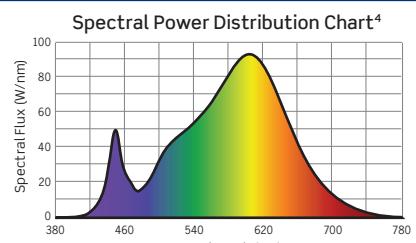



CYL8630K MVDCXPB: 3000K PENCIL BEAM

LM-63 Test No. G21080904; LM-79 Test No. S21081102

Fixture Delivered Lumens: 95.2
 Total Watts@120V: 42.4
 Lumens Per Watt: 2.25
 Center Beam Candle Power: 844
 Beam Distribution: 6.8° x 56.0°
 Spacing Criterion: 1.0
 Color Rendering Index (CRI)¹: 83.3
 Color Temperature (CCT)²: 3079K
 Designed for 50,000 Hour Lamp Life³

Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	52.7	3.8
6 FT	23.4	5.8
8 FT	13.2	7.7
10 FT	8.4	9.6
12 FT	5.9	11.5
14 FT	4.3	13.4

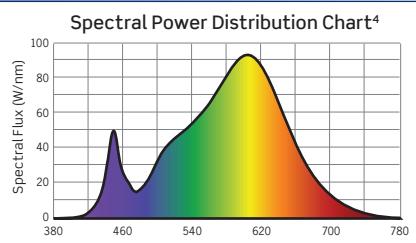

1. Accuracy of Rendering Colors 2. Color Appearance of Light Source 3. Dependent on Surrounding Temperatures 4. Colors Present within the Light Source

PHOTOMETRIC MULTIPLICATION FACTORS

Lumen output values fluctuate based on CCT. To estimate lumen output of the various CCT/CRI options, multiply 3000K (80 CRI min) results by the following:

CCT MULTIPLIERS		
CCT	STANDARD CRI	HIGH (90+) CRI
2700K	0.94	0.70
3000K	1.00	0.75
3500K	1.00	0.81
4000K	1.00	0.87





OUTPUT MULTIPLIERS				
10W SERIES 1	14W SERIES 2	20W SERIES 3	28W SERIES 4	36W SERIES 5
0.28	0.39	0.53	0.72	0.89

CYL8 SERIES | 8-Inch Round Indoor/Outdoor Cylinders: Photometry

TM-30 DATA for CYL8630K MVDCMCLR: 3000K, CLEAR MEDIUM

ANSI/IES TM-30-18 Color Rendition Report Test No. S21081102

R _f	86
R _g	96
CCT(K)	3079K
D _{uv}	0.0019
u ^I	0.2472
v ^I	0.5224

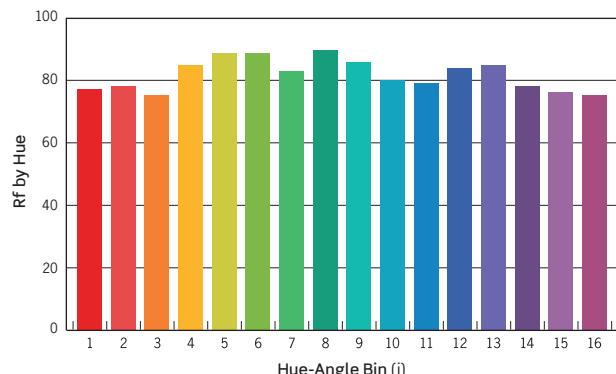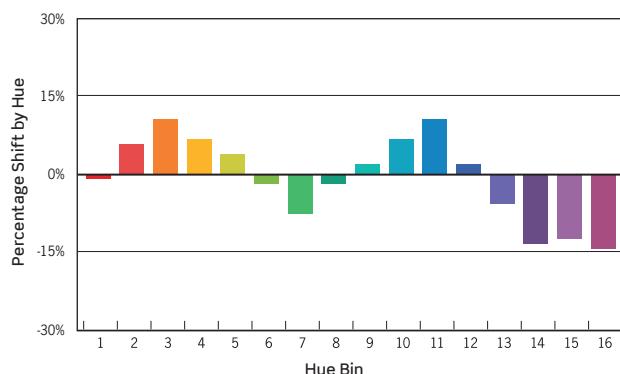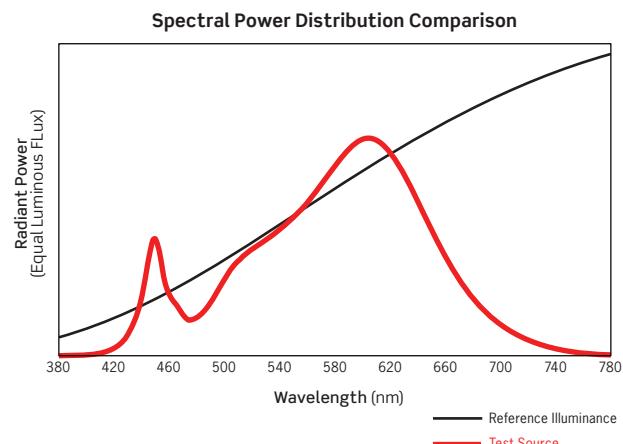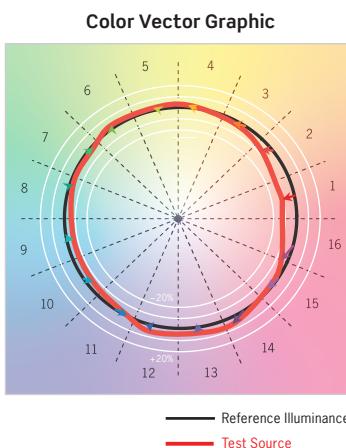

HUE BIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
HUE SHIFT	-1%	6%	10%	7%	4%	-2%	-7%	-2%	2%	7%	11%	2%	-6%	-14%	-13%	-15%
R _f VALUE	81	82	79	89	93	93	87	94	90	84	83	88	89	82	80	80

Colors are for visual orientation purposes only

CYL8 SERIES | 8-Inch Round Indoor/Outdoor Cylinders: Dimming Specifications

DIMMING SPECIFICATIONS

- Incandescent 120VAC Dimmers adjust the light with forward phase control, where the dimmer “chops” the forward part of the AC wave to deliver less or more power to the light source; no neutral wire connection required
- Electronic Low Voltage 120VAC Dimmers adjust the light with reverse phase control, where the dimmer “chops” the back part of the AC wave to deliver less or more power to the light source; neutral wire connection required
- 0-10V DC Low Voltage Dimmers operate using two (2) low voltage dimming wires that are separate from the 120V or 277V AC power. The Dimmer sends a variable output voltage to the luminaire based upon the dimming level. 10V Corresponds to undimmed operation, 5V to 50% and so on. Switching on/off is controlled with the line voltage power input (120V or 277V AC) to the Dimmer and then dimming operation is controlled with the 0-10V DC low voltage wiring connection between the Dimmer and the Driver. The control signal runs on two low voltage control wires (color coded violet and pink/gray).
- Lutron EcoSystem Drivers provide continuous dimming from 1%–100%; for a complete list of compatible dimmers and controls, please visit www.lutron.com
- Use DALI approved controls for dimming option MVD7 (eldoLED ECOdrive, 1%–100%) and MVD9 (eldoLED SOLOdrive, 0.1%–100%) options.

			MVD Dimming Option 120V-277V Phase ⁷ /0-10V Dimming	MVD6 Dimming Option 120V-277V eldoLED ECOdrive 0-10V, 1% Dimming	MVD8 Dimming Option 120V-277V eldoLED SOLOdrive 0-10V, 0.1% Dimming
Manufacturer	Product	Model	Light Output	Light Output	Light Output
Leviton	IllumaTech	IPI06-1LZ	1%-100%	N/A	N/A
Leviton	SureSlide	6631-2	1%-100%	N/A	N/A
Leviton	Vizia	VPE06	9%-100%	N/A	N/A
Leviton	Trimatron	6683-IW	6%-100%	N/A	N/A
Leviton	Decora	6161	15%-100%	N/A	N/A
Leviton	SureSlide	6633-P	1%-100%	N/A	N/A
Leviton	IllumaTech	IPE04	6%-100%	N/A	N/A
Leviton	IllumaTech	IP710-DLX	N/A	1%-100%	0.1%-100%
Cooper	Devine	DLC03P	1%-100%	N/A	N/A
Cooper	Skye	SLC03P	0%-100%	N/A	N/A
Cooper	Decorator	DAL06P	0%-100%	N/A	N/A
Pass & Seymour	Titan	CD4FB-W	N/A	1%-100%	0.1%-100%
Synergy		ISD BC	N/A	1%-100%	0.1%-100%
Watt Stopper	Miro Decorator	DCLV1	N/A	1%-100%	0.1%-100%
Lutron	Ariadni	TGCL-153P	1%-100%	N/A	N/A
Lutron	Ariadni	TG-600P	13%-100%	N/A	N/A
Lutron	Diva	DVCL-153P	1%-100%	N/A	N/A
Lutron	Diva	DV600P	6%-100%	N/A	N/A
Lutron	Diva	DVELV303P	6%-100%	N/A	N/A
Lutron	Diva	DVT	N/A	1%-100%	0.1%-100%
Lutron	Faedra	FAELV500	12%-100%	N/A	N/A
Lutron	Lumea	LG600P	8%-100%	N/A	N/A
Lutron	Maestro	MAELV600	16%-100%	N/A	N/A
Lutron	Nova	NFTV	N/A	1%-100%	0.1%-100%
Lutron	Nova T	NTFTV	N/A	1%-100%	0.1%-100%
Lutron	Skylark	S-603PG	5%-96%	N/A	N/A
Lutron	Skylark	S600P	5%-100%	N/A	N/A
Lutron	Skylark	SELV300P	10%-100%	N/A	N/A
Lutron	Skylark	CT103P	9%-100%	N/A	N/A

7. 277V Phase Dimming is not available

NOTES

- Testing was performed with a single fixture connected to dimmer.
- Testing has been performed on these dimmers, but this does not imply any warranty of compatibility.
- Dimming performance can be influenced by different loads, as well as variations in dimmer switches within the same model.
- Dimmer maximum load rating with LED may differ from published traditional source dimmer ratings. Consult manufacturer for maximum dimmer information.
- Consult factory for additional dimming information.