



SW SERIES | Surface Wrap Linear Series




Top View



Bottom View



End View



cETLus Listed

| | SW2: 2-Feet/24-Inches | SW4: 4-Feet/48-Inches |
|---------------------------|--|-----------------------|
| WATTAGE | 20W | 40W |
| LUMEN OUTPUT ¹ | 2047Lm | 4094Lm |
| COLOR TEMPERATURE | 3000K / 3500K / 4000K | |
| CRI | 80 Min./83 Typical | |
| MOUNTING | Surface Mount | |
| DIMMING TYPE | Non-Dimming | |
| FINISH | Matte White with Opaque White High Impact Acrylic Lens | |
| LISTINGS | ETL Certified for use in the U.S. and Canada Must be installed in accordance to all product specific installation instructions and appropriate National Electrical Codes Suitable for use in closets when installed in accordance with NFPA® 70, NEC® Section 410.16 (A)(1) and (C)(1) | |
| WARRANTY | Five (5) year replacement after date of purchase | |
| SYSTEM RATING | 50,000 Hours @ 70% Lumen Maintenance | |

1. Approximate lumen output based on 3000K performance; see photometric test results for additional information

ORDERING INFORMATION

Example Order: SW230KMV-P

| Luminaire Length | Color Temp/CRI | Driver | Finish |
|------------------|----------------|---------------|---------|
| SW2 2-Ft/24-In | 83 (80min) CRI | MV 120 - 277V | P White |
| SW4 4-Ft/48-In | 30K 3000K | | |
| | 35K 3500K | | |
| | 40K 4000K | | |

PRODUCT SPECIFICATIONS

CONSTRUCTION

- Commercial Grade 2-Feet/24-Inches and 4-Feet/48-Inches Surface Mount Wrap luminaires
- Matte White finish with Opaque White High Impact Acrylic Lens
- Includes Hardware for surface mounting to Ceiling or Wall

PERFORMANCE SUMMARY

- Integrated LED Strips deliver over 1000Lm/Ft at 10W/Ft
- Available in 3000K, 3500K, and 4000K Color Temperatures with a CRI of 80 min., 83 typical
- 120-277V Integrated Non-dimming Driver

SW SERIES

| Surface Wrap Linear Series



PHOTOMETRIC DATA

SW440KMV: 4-Foot, 4000K Surface Mount

LM-63 Test No. 88383; LM-79 Test No. 88383

Fixture Delivered Lumens: 4094
 Total Watts@120V: 41.0
 Lumens Per Watt: 99.9
 Center Beam Candle Power: 1327
 Beam Distribution: 109.4° (at 0°) x
 116.1° (at 90°)
 Spacing Criterion: 1.23 @ 0°
 Color Rendering Index (CRI)¹: 84
 Color Temperature (CCT)²: 4094K
 Designed for 50,000 Hour Lamp Life³

| Intensity Distribution | | |
|------------------------|---------------------|--------------------|
| DISTANCE (FT.) | FOOTCANDLES (FC) | BEAM DIA. (FT.) |
| 6 FT | 36.9 | 7.5 |
| 8 FT | 20.7 | 9.9 |
| 10 FT | 13.3 | 12.4 |
| 12 FT | 9.2 | 14.9 |
| 14 FT | 6.8 | 17.4 |
| 16 FT | 5.2 | 19.9 |

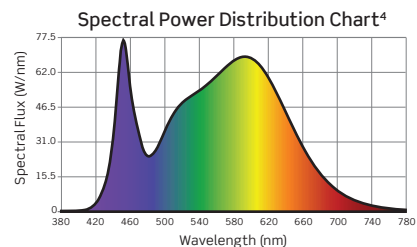

1. Accuracy of Rendering Colors 2. Color Appearance of Light Source 3. Dependent on Surrounding Temperatures 4. Colors Present within the Light Source