


RF4L1 SERIES | 4-Inch Retrofit Trim Module




**DISCONTINUED ITEM:
LIMITED INVENTORY**
Consult Factory for Availability

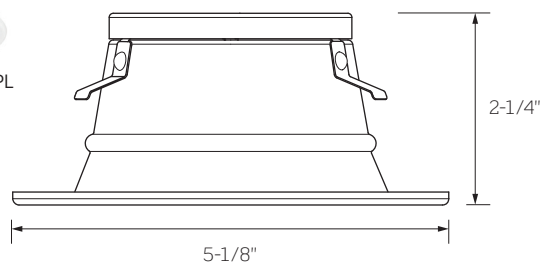

Housing Compatibility

Module will fit in housings with the following dimensional space. E26 Socket, GU24 Base, or male IDEAL® 182 Quick-Connect Connector are required.

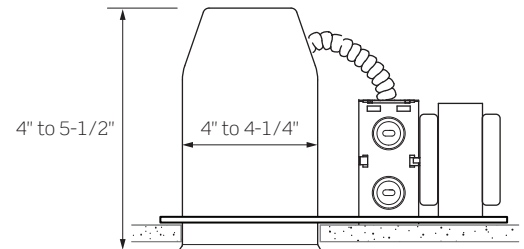

cETLus
Certified



Suitable for
Wet Locations

	RF4L1
WATTAGE	13W
LUMEN OUTPUT ¹	800Lm
COLOR TEMPERATURE	2700K / 3000K
CRI	90
MOUNTING	Surface Mount
DIMMING TYPE	120V Forward/Reverse Phase Dimming
FINISH	Matte White or Platinum Haze Reflector, Matte White Trim Ring
LISTINGS	ETL Certified for use in the U.S. and Canada; Suitable for use in Wet Locations
WARRANTY	Five (5) year replacement after date of purchase
SYSTEM RATING	50,000 Hours @ 70% Lumen Maintenance

1. Approximate lumen output based on 3000K performance

ORDERING INFORMATION

Example Order: RF4L127KCE-PL

Luminaire	Color Temp/CRI	Base Adapter	Reflector/Trim Finish
RF4L1 4-Inch Retrofit Module 13W, 800Lm	90 CRI 27KC 2700K 30KC 3000K	E E26 Base Adapter G GU24 Base Adapter	PL Platinum Haze Reflector/ White Trim Ring WHT White Reflector/ White Trim Ring

PRODUCT SPECIFICATIONS

CONSTRUCTION

- For use in New Construction and Retrofit light commercial and residential applications
- Compatible with most 4-inch Recessed Downlights (refer to housing size compatibility diagram above)
- Integral Reflector and Trim Ring are fabricated of heavy gage aluminum
- E26 Medium Screw Base or GU24 Base Harness Adapters for easy installation
- Friction Clips secure Module in selected Housing

PERFORMANCE SUMMARY

- Optical Acrylic Diffusion Lens produces high lumen transmission and even illumination
- Multiple LED chips with excellent fixture-to-fixture color consistency
- Direct 120VAC design – no driver needed
- 120V Forward/Reverse Phase Dimming