
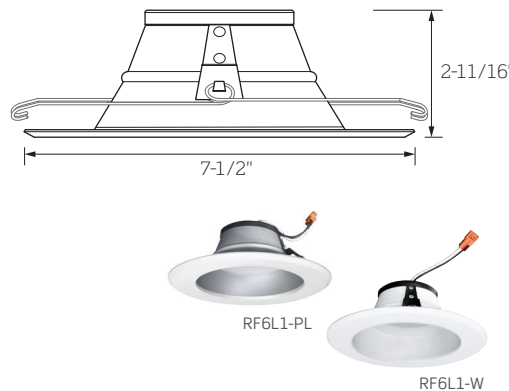



RL38L-ICSA/RF6L1 | 6-Inch Dedicated New Construction Insulated Ceiling (IC)/StopAire™ Housing with LED Trim Module

DISCONTINUED ITEMS: LIMITED INVENTORY


Consult Factory for Availability

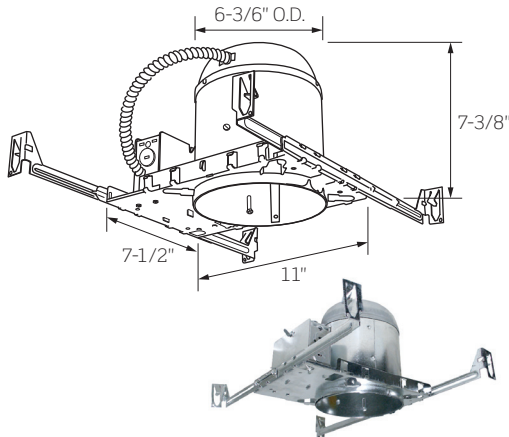

	RL38L-ICSA HOUSING
MAX. WATTAGE	20W
HOUSING STYLE	Insulated Ceiling (IC)/StopAire™ New Construction Downlight with Dedicated LED Module Luminaire Disconnect
CEILING THICKNESS	1/2- to 1-3/4-Inches
CEILING OPENING	6-3/8-Inches
INPUT VOLTAGE	120V
LISTINGS	cULus Listed; Suitable for Damp Locations Conforms to Washington State Energy Code (WSEC) for Low Air Infiltration; tested in accordance with ASTM E283 (2.0 CFM or less)
WARRANTY	Five (5) year replacement after date of purchase



	RF6L1 LED MODULE
WATTAGE	15W
LUMEN OUTPUT ¹	1000Lm
COLOR TEMPERATURE	2700K / 3000K
CRI	90
MOUNTING	Surface Mount
DIMMING TYPE	120V Forward/Reverse Phase Dimming
FINISH	Matte White or Platinum Haze Reflector, Matte White Trim Ring
LISTINGS	cETLus Listed to UL standards; Suitable for Wet Locations
WARRANTY	Five (5) year replacement after date of purchase
SYSTEM RATING	50,000 Hours @ 70% Lumen Maintenance



1. Approximate lumen output based on 3000K performance

ORDERING INFORMATION

Example Order: RL38L-ICSA

RF6L127KCE-PL

HOUSING + LED MODULE = COMPLETE LUMINAIRE

Housing and Module are ordered as separate line items

Housing
RL38L-ICSA 6-Inch Dedicated LED Insulated Ceiling (IC)/StopAire™ Rated New Construction Downlight

LED Module
RF6L127KCE 6-Inch Retrofit Module 15W/1000Lm, 2700K/90 CRI, E26 Base Adapter
RF6L130KCE 6-Inch Retrofit Module 15W/1000Lm, 3000K/90 CRI, E26 Base Adapter

Reflector/Trim Finish
PL Platinum Haze Reflector/White Trim Ring
WHT White Reflector/White Trim Ring

RL38L-ICSA/RF6L1 | 6-Inch Dedicated New Construction Insulated Ceiling (IC)/ StopAire™ Housing with LED Trim Module

PRODUCT SPECIFICATIONS

HOUSING

- Includes male IDEAL Powerplug® Model 182 Luminaire Connector for connection to LED Trim Module
- Air-tight for insulated ceilings; requires min. 3-inch clearance around Housing from insulation material
- Aluminum and galvanized steel construction
- Dual Extension Bars adjustable for 16- and 24-inch center joists (14-1/4- to 24-1/2-inches)
- Nailer Bar Hangers are included with Housing and may be extended to rest on T-bar ceilings; optional clip-on T-bar Hangers also available
- Prewired junction box with convenient screwdriver pry-outs: six (6) 1/2-inch, one (1) 1/2-inch x 3/4-inch concentric and four (4) Romex knockouts
- Spring-latch Access Plates
- Quick-connect Push-in Wire Connectors provided
- Approved for through-circuit wiring; max. eight (8) #12 AWG (4 in/4 out)

APPROVED DIMMERS

- LEVITON: 6631, 6674, VP106
- LUTRON: CTCL-153P, DV-603-P, DV-CL153P, MACL-153M, SELV-300P

MODULE

- For use in New Construction and Retrofit light commercial and residential applications
- Integral Reflector and Trim Ring are fabricated of heavy gage aluminum; Matte White or Platinum Haze Reflector finish with Matte White Trim Ring
- Includes female IDEAL Powerplug® Model 182 Luminaire Connector for connection to LED Trim Module
- E26 Medium Screw Base Adapter for easy installation
- Nickel Plated Steel Torsion Springs secure module in selected Housing
- Optical Acrylic Diffusion Lens produces high lumen transmission and even illumination
- Multiple LED chips with excellent fixture-to-fixture color consistency
- Direct 120VAC design – no driver needed
- 120V Forward/Reverse Phase Dimming