

Adjustable Slim Downlights

A Direct Mount, Fully Adjustable, Downlighting Solution



Requires only a 2-inch Plenum

120V Phase Dimming
down to 10%

Five Color
selectable CCT
with 90+ CRI

IC-Rated Die-cast
Aluminum Housing

Closed Cell
Gasket included

Does not require an
existing Housing or
Junction Box

Fully adjustable:
up to 80° of tilt and
350° of rotation

Polycarbonate Diffusion Lens

- 4- and 6- Inch Diameters
- 800 and 1100 Lumens



cETLus
Listed



Wet
Location



ENERGY
STAR®





T24
Part 6 JA8



IC Rated




Air-Tight

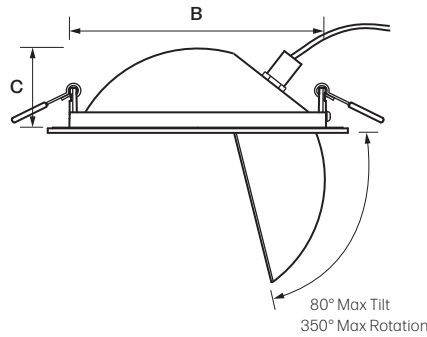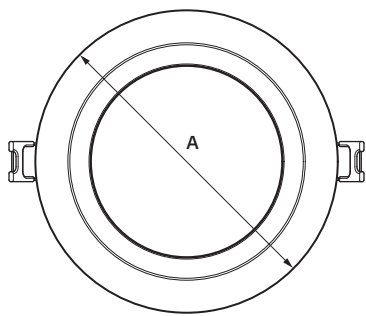

	A	B	C
WFAR4	5-1/16"	4-1/4"	1-1/4"
WFAR6	7-1/4"	6-3/8"	1-7/8"

Recommended Ceiling Thickness: 1-1/2" Max.

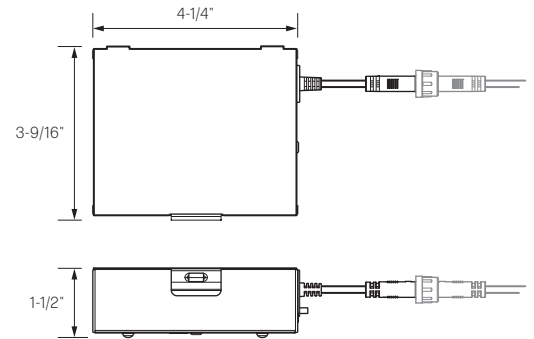

ORDERING INFORMATION

Example Order: WFAR4-SW5C12D-MW

Housing
WFAR4 4-In. Adjustable Slim 12W / 800Lm
WFAR6 6-In. Adjustable Slim 15W / 1100Lm

Lumen values are nominal and vary based on CCT

Color Temp/CRI	Driver/Dimming
SW5C 5-CCT Selectable / 90+ CRI 2700K/3000K/3500K/4000K/5000K	12D 120V Phase Dimming (Forward / Reverse)

Finish
MW Matte White

ACCESSORIES

New Construction Mounting Plate

WFRPLU Universal Fit New
Construction Mounting Plate



Driver / Junction Box Extension Cables

WFEC6 6 Ft Extension Cable
WFEC10 10 Ft Extension Cable
WFEC20 20 Ft Extension Cable



COMPATIBLE DIMMERS

- Incandescent 120V AC Dimmers adjust the light with Forward Phase Control, where the Dimmer "chops" the forward part of the AC Wave to deliver less or more power to the light source. No Neutral Wire Connection required.
- Electronic Low Voltage 120V AC Dimmers adjust the light with Reverse Phase Control, where the Dimmer "chops" the back part of the AC Wave to deliver less or more power to the light source. Neutral Wire Connection required.

NOTES

- Testing has been performed on these Dimmers, but this does not imply any warranty of compatibility.
- Dimming performance can be influenced by different Loads, as well as variations in Dimmer Switches within the same Model.
- Dimmer Maximum Load Rating with LED may differ from published Traditional Source Dimmer Ratings; consult Dimmer Manufacturer for maximum Dimmer information.
- Consult factory for additional dimming information.

DIMMING TYPE: Forward/Reverse Phase
TYPICAL DIMMING RANGE: 100% to 10%

Supplier	Series	Model No.
Leviton	SureSlide	6674, 6674N, 66DF
Leviton	IllumaTech	IPL06, IPE04
Leviton	Decora Digital	DDL06-BL, DDM06, DDMX1, DDE06
Leviton	Decora Slide	DSE06, DSM10, DSL06
Leviton	Trimatron Rotary	RDL06, RNL06
Leviton	Toggle Slide	TSL06, TSM10
Leviton	Decora Smart Wi-Fi	D26HD, DN6HD, D2MSD, DWVAA
Leviton	Decora Smart Z-wave	ZW6HD
Leviton	Decora Evolve	VM2D3, VMDD3
Lutron	Diva	DVCL-153P
Lutron	Skylark	CTCL-153P
Lutron	Ariadni Toggler	TGCL-153P
Lutron	Maestro	MACL-153M
Lutron	Caseta	P-PKG1W-WH-R
Eaton	Eaton Slide	SAL06P-W