


**Specflex** | **AFSSCN Dry Location Series**  
Architectural Strip Lighting | 24V Static White, Continuous COB

24V Architectural Flex Strip, Static White, Continuous COB  
This series offers dot-free illumination with excellent color rendering and consistency. Designed for reliable performance and ease of use. Ideal for cove, slot, undercabinet, millwork details, architectural reveals, and endless accent lighting applications.



**FEATURES**

- Continuous Density: Continuous COB
- One (1) Wattage/Lumen option
- 90+ CRI and <3 SDCM ensures excellent color rendering and consistency
- Full Reels or Factory Cut into Custom Lengths
- Low power consumption with consistent, stable performance
- Wide range of Dimming and Non-dimming LED Drivers, Connectors, Mounting Channels, and Lenses
- Declare Listed
- Complete System is cCSAus Listed to UL and CSA standards

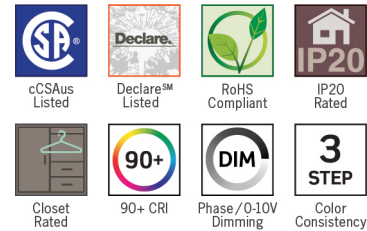

| SERIES                    | AFSSCN-5  |
|---------------------------|---|
| WATTAGE                   | 4.6W/Ft   |
| LUMEN OUTPUT <sup>1</sup> | 432Lm/Ft  |
| EFFICACY <sup>1</sup>     | 92Lm/W  |
| MAX RUN LENGTH            | 16.4Ft  |
| LED DENSITY               | Continuous COB  |
| CUT INCREMENT             | 1.97-Inches (50mm), Field Cuttable  |
| STRIP LIGHT WIDTH         | 0.39-Inches (10mm)  |
| MOUNTING                  | 3M™ 300LSE Double Sided Tape / Channels & Clips   |
| COLOR TEMPERATURE         | 2100K / 2400K / 2700K / 3000K / Consult factory for additional CCT options  |
| CRI                       | 90+   |
| COLOR CONSISTENCY         | <3 SDCM (Standard Deviation Color Matching)   |
| OPERATING VOLTAGE         | 24V DC  |
| DIMMING                   | Forward / Reverse Phase and 0-10V   |
| OPERATING TEMP.           | -25° to 40°C (-13° to 104°F)  |
| LIFE RATING               | 50,000 Hours @ 70% Lumen Maintenance  |
| <b>LISTINGS</b>           | cCSAus Listed to UL and CSA standards<br>Suitable for Dry Locations, IP20 Rated. For Wet Location rated options, see AFSSCN Wet Location Series<br>Closet Rated when used with Channel, Endcaps and Lens<br>Declare Listed<br>RoHS Compliant<br>For use with Class 2 LED Drivers only |
| <b>WARRANTY</b>           | Five (5) year replacement after date of purchase when installed within a ConTech Mounting Channel<br>Three (3) year replacement after date of purchase when installed without a ConTech Mounting Channel  |

1. Approximate lumen output based on 3000K performance; see photometric test results for additional information

**Specflex** | **AFSSCN Dry Location Series**  
 Architectural Strip Lighting | 24V Static White, Continuous COB

**ORDERING INFORMATION**

**FULL REELS**

- Full Reels are available in Max Run Length for each available Wattage
- Each Reel has a 72-inch Plenum Rated Cable Power Lead soldered to the start of the length
- Additional Plenum Rated Cable available (ordered separately), see Page 9 for details
- Reels can be cut in the field to desired length at the indicated cut points; excess Strip Light can be configured for additional installations

Example Order: AFSSCN-530K-R

| Series   | Wattage          | CCT <sup>1</sup> /CRI   | Illuminated Length  |
|--|------------------|---|---|
| <b>AFSSCN</b><br>Static White:<br>Continuous COB | <b>5</b> 4.6W/Ft | 90+ CRI<br><b>21K</b> 2100K<br><b>24K</b> 2400K<br><b>27K</b> 2700K<br><b>30K</b> 3000K | <b>R</b> Full Reel with 72-inch Power lead<br>4.6W/Ft: 16.4 Ft Reel |


**CUSTOM LENGTHS**

- Custom Lengths cannot exceed the Maximum Run Length for the specified Wattage; see Max Run Length table on Page 14 for details
- Allow additional lead time for Custom Lengths
- Custom Lengths are made-to-order and are not returnable; approved Submittal Sheets are required before processing the order

Example Order: AFSSCN-530K-S-NT-C188

| Series   | Wattage          | CCT <sup>1</sup> /CRI   | Start Termination   | End Termination   | Custom Length  |
|--|------------------|---|---|---|--|
| <b>AFSSCN</b><br>Static White:<br>Continuous COB | <b>5</b> 4.6W/Ft | 90+ CRI<br><b>21K</b> 2100K<br><b>24K</b> 2400K<br><b>27K</b> 2700K<br><b>30K</b> 3000K | <b>F</b> Female Barrel Connector<br><b>M</b> Male Barrel Connector<br><b>S<sup>2</sup></b> 72-inch Soldered Lead Wires<br><b>SXXX<sup>2</sup></b> Custom Length Soldered Lead Wires | <b>NT</b> No Termination<br><b>F</b> Female Barrel Connector<br><b>M</b> Male Barrel Connector<br><b>S<sup>2</sup></b> 72-inch Soldered Lead Wires<br><b>SXXX<sup>2</sup></b> Custom Length Soldered Lead Wires | <b>CXXX</b> Custom Length<br>Desired length is specified in inches i.e. if the desired length is 15 Ft.-8-Inches or 188-inches total, enter C188<br>AFSSCN Series has a cut increment of 1.97-inches, illuminated length will be rounded down to nearest cut increment |

1. Consult factory for additional CCT options; additional lead time for special request CCTs
2. All Lead Wires come sheathed in a Plenum Rated Cable rated to 90°C minimum; specify Custom Length Lead Wires in inches; max length: 120-inches

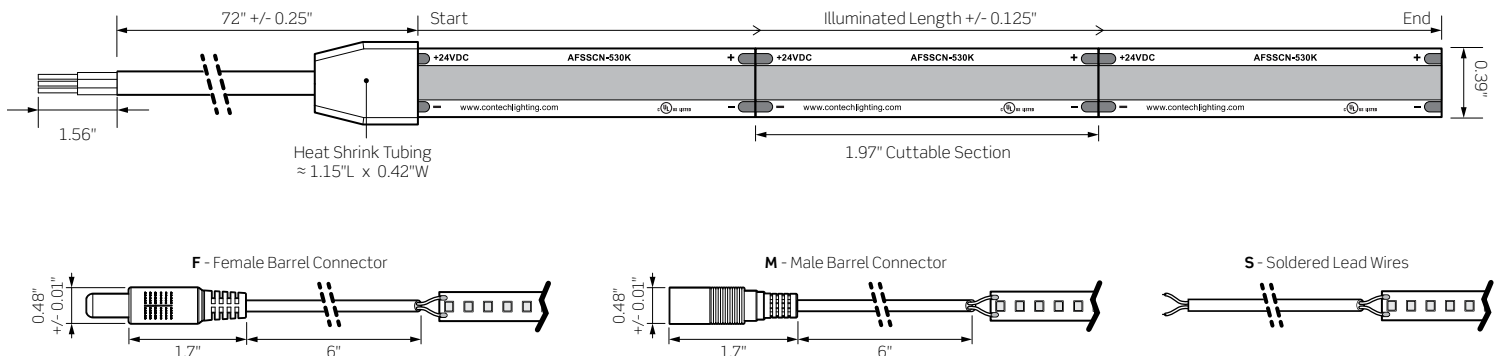

**Specflex**  
Architectural Strip Lighting

**AFSSCN Dry Location Series**

24V Static White, Continuous COB

**24V MOUNTING CHANNELS AND ACCESSORIES**

**ALUMINUM MOUNTING CHANNEL**

- Provides excellent heat sinking and protection to the LEDs while ensuring a clean, straight run
- Anodized Satin Aluminum Channel
- All Channels and Accessories are Declare Listed

**CHANNEL MOUNTING CLIPS**


- Stainless Steel and Adjustable Mounting Clip is ABS Plastic
- 24-Inches between clips recommended for most applications

**CHANNEL ENDCAPS**


- Creates a clean finish to the Mounting Channel
- ABS Grey Plastic
- Endcaps are ordered individually; one (1) solid Endcap and one (1) open Endcap (with Slot) is recommended
- Use Endcaps with Slots for Power Feed

Channel, Lens, Endcaps, and Mounting Clips are ordered separately

**BEAM FOCUSING MOUNTING CHANNEL**

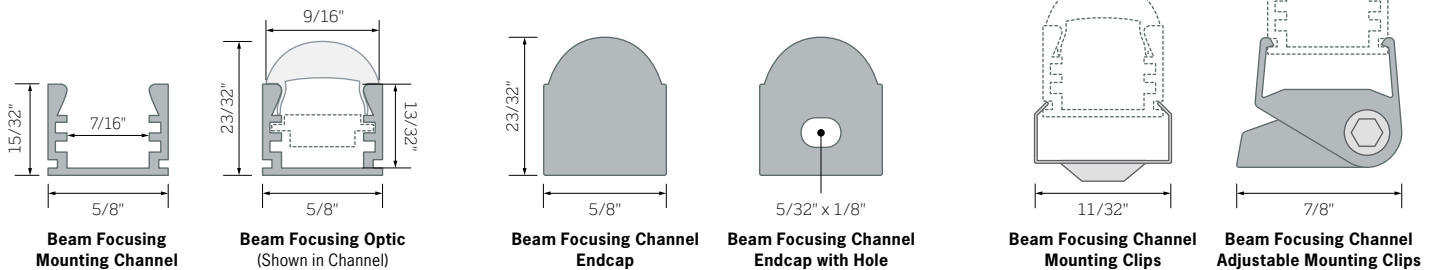

SELECT 1 OF 5 CONFIGURATIONS: (BEAM SPREADS NOT FIELD CHANGEABLE)

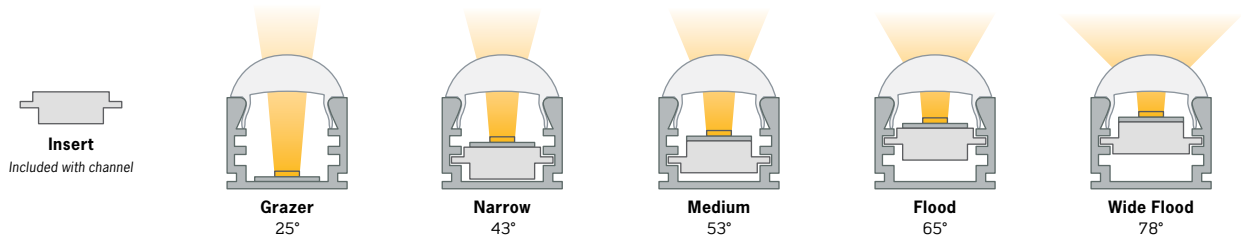

| Channel and Optic   |
|---|
| <b>AFEX1112BEAMS78-S</b><br>78-Inch Beam Focusing Mounting Channel with Insert                |
| <b>AFL1112BEAMS78-FR</b><br>78-Inch Beam Focusing Optic, Frosted;<br>No Pixelation with Optic |

| Endcaps  |
|--|
| <b>AFEX1112BEAMS-EC</b><br>Beam Focusing Channel Solid Endcap, Grey      |
| <b>AFEX1112BEAMS-ECH</b><br>Beam Focusing Channel Endcap with Hole, Grey |


| Mounting Clips   |
|--|
| <b>AFEX1112BEAMS-MC4</b><br>Four (4) Mounting Clips, Stainless Steel |
| <b>AFEX1112BEAMS-AMC6</b><br>Six (6) Adjustable Mounting Clips, Grey |

For Photometrics, see page 13  
Channel Series not compatible with Screw-Tight Connectors


**Specflex** | **AFSSCN Dry Location Series**  
 Architectural Strip Lighting | 24V Static White, Continuous COB

**24V MOUNTING CHANNELS AND ACCESSORIES**


**NARROW SURFACE MOUNTING CHANNEL**



**Narrow Surface Mounting Channel**



**Frosted Diffusion Lens (Shown in Channel)**



**Narrow Surface Channel Endcap**




**Narrow Surface Channel Endcap with Slot**

| Channel and Lens     |   |
|----------------------|---|
| <b>AFEX1012S72-S</b> | 6 Ft. Narrow Surface Mounting Channel, Aluminum   |
| <b>AFL10S72-FR</b>   | 6 Ft. Narrow Surface Channel Diffusion Lens, Frosted; No Pixelation with Diffusion Lens |

| Endcaps              |   |
|----------------------|---|
| <b>AFEX1012S-EC</b>  | Narrow Surface Channel Solid Endcap, Grey     |
| <b>AFEX1012S-ECS</b> | Narrow Surface Channel Endcap with Slot, Grey |

Mounting Clips not available; use 3M™ Double-Sided Adhesive or Screw and Wall Anchor  
 Channel Series not compatible with Screw-Tight Connectors


**SHALLOW SURFACE MOUNTING CHANNEL**




**Shallow Surface Mounting Channel**





**Frosted Diffusion Lens (Shown in Channel)**



**Shallow Surface Channel Endcap**



**Shallow Surface Channel Endcap with Slot**




**Shallow Surface Channel Mounting Clips**

| Channel and Lens     |  |
|----------------------|--|
| <b>AFEX1209S72-S</b> | 6 Ft. Shallow Surface Mounting Channel, Aluminum   |
| <b>AFL1272-FR</b>    | 6 Ft. Shallow Surface Channel Diffusion Lens, Frosted; No Pixelation with Diffusion Lens |


| Endcaps              |  |
|----------------------|--|
| <b>AFEX1209S-EC</b>  | Shallow Surface Channel Solid Endcap, Grey     |
| <b>AFEX1209S-ECS</b> | Shallow Surface Channel Endcap with Slot, Grey |

| Mounting Clips     |  |
|--------------------|--|
| <b>AFEX12S-MC4</b> | Four (4) Mounting Clips, Stainless Steel |


**DEEP SURFACE MOUNTING CHANNEL**




**Deep Surface Mounting Channel**





**Frosted Diffusion Lens (Shown in Channel)**



**Deep Surface Channel Endcap**



**Deep Surface Channel Endcap with Slot**



**Deep Surface Channel Mounting Clips**

| Channel and Lens     |   |
|----------------------|---|
| <b>AFEX1215S72-S</b> | 6 Ft. Deep Surface Mounting Channel, Aluminum   |
| <b>AFL1272-FR</b>    | 6 Ft. Deep Surface Channel Diffusion Lens, Frosted; No Pixelation with Diffusion Lens |


| Endcaps              |   |
|----------------------|---|
| <b>AFEX1215S-EC</b>  | Deep Surface Channel Solid Endcap, Grey     |
| <b>AFEX1215S-ECS</b> | Deep Surface Channel Endcap with Slot, Grey |

| Mounting Clips     |  |
|--------------------|--|
| <b>AFEX12S-MC4</b> | Four (4) Mounting Clips, Stainless Steel |

**Specflex** | **AFSSCN Dry Location Series**  
 Architectural Strip Lighting | 24V Static White, Continuous COB

**24V MOUNTING CHANNELS AND ACCESSORIES**


**WIDE SURFACE MOUNTING CHANNEL**

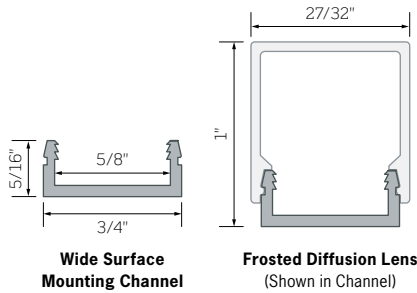

| Channel and Lens     |   |
|----------------------|---|
| <b>AFEX1508S72-S</b> | 6 Ft. Wide Surface Mounting Channel, Aluminum   |
| <b>AFL1572-FR</b>    | 6 Ft. Wide Surface Channel Diffusion Lens, Frosted; No Pixelation with Diffusion Lens |

Mounting Clips not available; use 3M™ Double-Sided Adhesive or Screw and Wall Anchor

**EXTRA WIDE SURFACE MOUNTING CHANNEL**

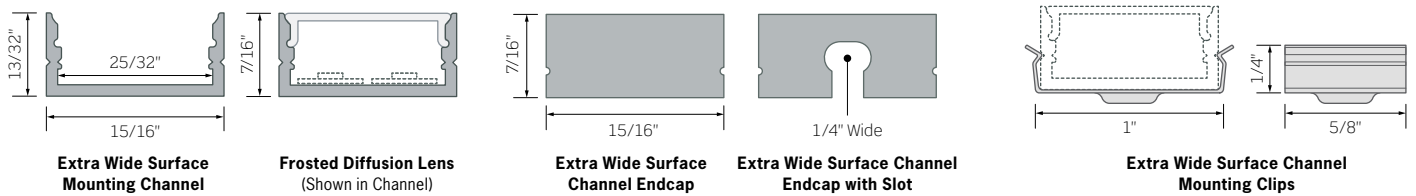


| Channel and Lens     |   |
|----------------------|---|
| <b>AFEX2011S72-S</b> | 6 Ft. Extra Wide Surface Mounting Channel, Aluminum   |
| <b>AFL2072-FR</b>    | 6 Ft. Extra Wide Surface Channel Diffusion Lens, Frosted; No Pixelation with Diffusion Lens |

| Endcaps              |   |
|----------------------|---|
| <b>AFEX2011S-EC</b>  | Extra Wide Surface Channel Solid Endcap, Grey     |
| <b>AFEX2011S-ECS</b> | Extra Wide Surface Channel Endcap with Slot, Grey |

| Mounting Clips       |  |
|----------------------|--|
| <b>AFEX2011S-MC4</b> | Four (4) Mounting Clips, Stainless Steel |

**45° ANGLED MOUNTING CHANNEL**

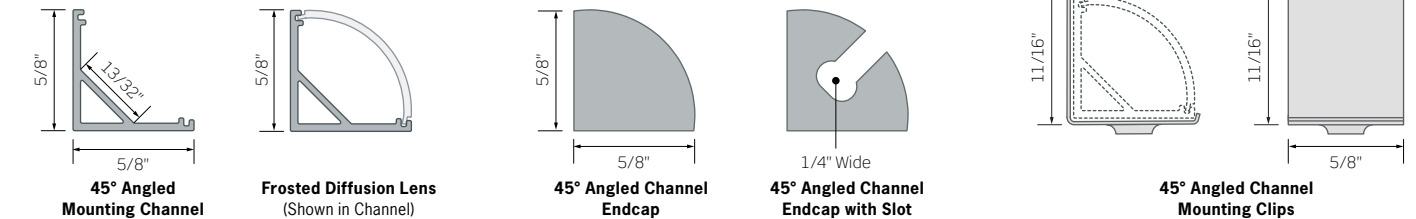

| Channel and Lens     |   |
|----------------------|---|
| <b>AFEX1016A72-S</b> | 6 Ft. 45° Angled Mounting Channel, Aluminum   |
| <b>AFL10A72-FR</b>   | 6 Ft. 45° Angled Channel Diffusion Lens, Frosted; No Pixelation with Diffusion Lens |

| Endcaps              |   |
|----------------------|---|
| <b>AFEX1016A-EC</b>  | 45° Angled Channel Solid Endcap, Grey     |
| <b>AFEX1016A-ECS</b> | 45° Angled Channel Endcap with Slot, Grey |


| Mounting Clips       |  |
|----------------------|--|
| <b>AFEX1016A-MC4</b> | Four (4) Mounting Clips, Stainless Steel |

Channel Series not compatible with Screw-Tight Connectors

**Specflex** | **AFSSCN Dry Location Series**  
 Architectural Strip Lighting | 24V Static White, Continuous COB

**24V MOUNTING CHANNELS AND ACCESSORIES**

**45° ANGLED WIDE MOUNTING CHANNEL**

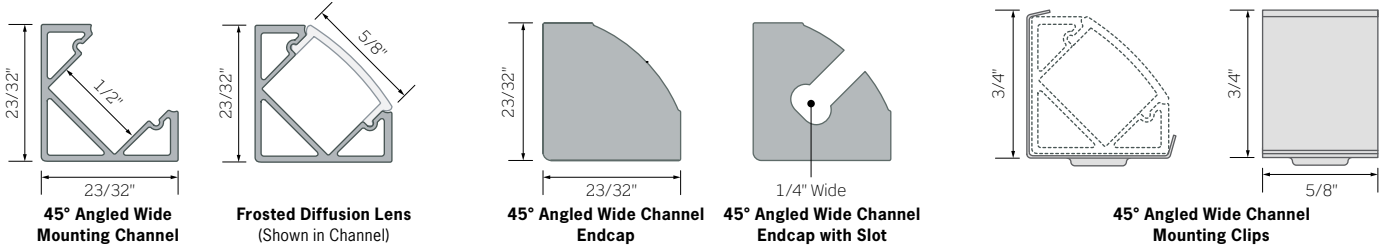


| Channel and Lens     |  |
|----------------------|--|
| <b>AFEX1318A72-S</b> | 6 Ft. 45° Angled Wide Mounting Channel, Aluminum   |
| <b>AFL1372-FR</b>    | 6 Ft. 45° Angled Wide Channel Diffusion Lens, Frosted; No Pixelation with Diffusion Lens |

| Endcaps              |  |
|----------------------|--|
| <b>AFEX1318A-EC</b>  | 45° Angled Wide Channel Solid Endcap, Grey     |
| <b>AFEX1318A-ECS</b> | 45° Angled Wide Channel Endcap with Slot, Grey |

| Mounting Clips       |  |
|----------------------|--|
| <b>AFEX1318A-MC4</b> | Four (4) Mounting Clips, Stainless Steel |

**45° ANGLED EXTRA WIDE MOUNTING CHANNEL**

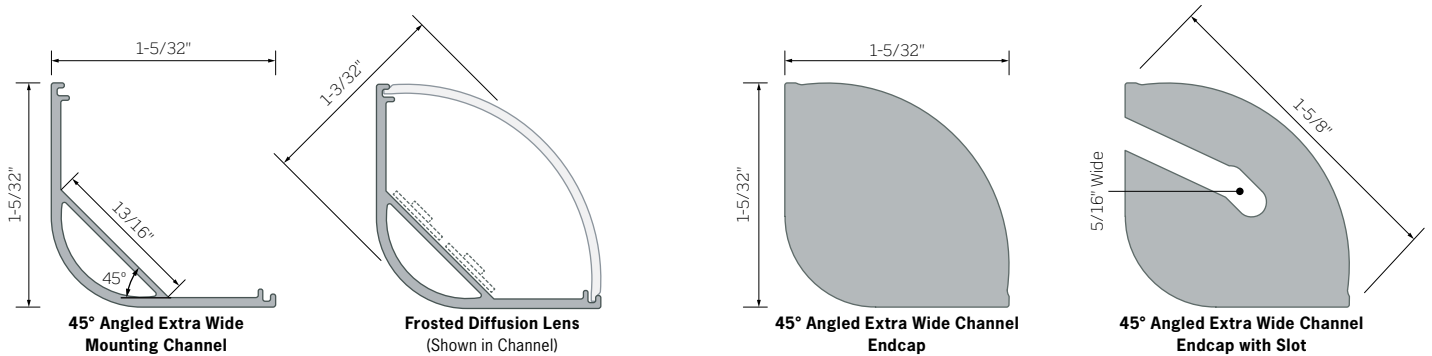

| Channel and Lens     |  |
|----------------------|--|
| <b>AFEX2030A72-S</b> | 6 Ft. 45° Angled Extra Wide Mounting Channel, Aluminum   |
| <b>AFL20A72-FR</b>   | 6 Ft. 45° Angled Extra Wide Channel Diffusion Lens, Frosted; No Pixelation with Diffusion Lens |

| Endcaps              |  |
|----------------------|--|
| <b>AFEX2030A-EC</b>  | 45° Angled Extra Wide Channel Solid Endcap, Grey     |
| <b>AFEX2030A-ECS</b> | 45° Angled Extra Wide Channel Endcap with Slot, Grey |

Mounting Clips not available; use 3M™ Double-Sided Adhesive or Screw and Wall Anchor


**Specflex**  
Architectural Strip Lighting

**AFSSCN Dry Location Series**


24V Static White, Continuous COB

**24V MOUNTING CHANNELS AND ACCESSORIES**


**SHALLOW RECESSED MOUNTING CHANNEL**




**Shallow Recessed Mounting Channel**



**Frosted Diffusion Lens (Shown in Channel)**



**Shallow Recessed Channel Endcap**




**Shallow Recessed Channel Endcap with Slot**

| Channel and Lens     |   |
|----------------------|---|
| <b>AFEX1209R72-S</b> | 6 Ft. Shallow Recessed Mounting Channel, Aluminum   |
| <b>AFL1272-FR</b>    | 6 Ft. Shallow Recessed Channel Diffusion Lens, Frosted; No Pixelation with Diffusion Lens |


| Endcaps              |   |
|----------------------|---|
| <b>AFEX1209R-EC</b>  | Shallow Recessed Channel Solid Endcap, Grey     |
| <b>AFEX1209R-ECS</b> | Shallow Recessed Channel Endcap with Slot, Grey |

Mounting Clips not available; use 3M™ Double-Sided Adhesive or Screw and Wall Anchor


**DEEP RECESSED MOUNTING CHANNEL**




**Deep Recessed Mounting Channel**




**Frosted Diffusion Lens (Shown in Channel)**




**Deep Recessed Channel Endcap**



**Deep Recessed Channel Endcap with Slot**



**Deep Recessed Channel Mounting Clips**




| Channel and Lens     |  |
|----------------------|--|
| <b>AFEX1215R72-S</b> | 6 Ft. Deep Recessed Mounting Channel, Aluminum   |
| <b>AFL1272-FR</b>    | 6 Ft. Deep Recessed Channel Diffusion Lens, Frosted; No Pixelation with Diffusion Lens |


| Endcaps              |  |
|----------------------|--|
| <b>AFEX1215R-EC</b>  | Deep Recessed Channel Solid Endcap, Grey     |
| <b>AFEX1215R-ECS</b> | Deep Recessed Channel Endcap with Slot, Grey |

| Mounting Clips       |  |
|----------------------|--|
| <b>AFEX1215R-MC4</b> | Four (4) Mounting Clips, Stainless Steel |


**EXTRA WIDE RECESSED MOUNTING CHANNEL**




**Extra Wide Recessed Mounting Channel**



**Frosted Diffusion Lens (Shown in Channel)**



**Extra Wide Recessed Channel Endcap**



**Extra Wide Recessed Channel Endcap with Slot**

| Channel and Lens     |  |
|----------------------|--|
| <b>AFEX2011R72-S</b> | 6 Ft. Extra Wide Recessed Mounting Channel, Aluminum   |
| <b>AFL2072-FR</b>    | 6 Ft. Extra Wide Recessed Channel Diffusion Lens, Frosted; No Pixelation with Diffusion Lens |

| Endcaps              |  |
|----------------------|--|
| <b>AFEX2011R-EC</b>  | Extra Wide Recessed Channel Solid Endcap, Grey     |
| <b>AFEX2011R-ECS</b> | Extra Wide Recessed Channel Endcap with Slot, Grey |

Mounting Clips not available; use 3M™ Double-Sided Adhesive or Screw and Wall Anchor

**Specflex**  
Architectural Strip Lighting

**AFSSCN Dry Location Series**  
24V Static White, Continuous COB

**24V CONNECTORS**

**TLCC Series**

*Barrel Connectors*

- 6-Inch long Male and Female Connector
- Includes Wire Pigtail
- Hardwire to LED Driver for easy plug in connection



**Model Number**

- TLCCM** Male barrel connector
- TLCCF** Female barrel connector

**TLCS Series**

*Plug-and-Play Power Splitter*

- Approximately 2 feet long
- 2-Way: one (1) Male and two (2) Female Connectors
- 3-Way: one (1) Male and three (3) Female Connectors



**Model Number**

- TLCS2** Plug-and-play 2-way power splitter
- TLCS3** Plug-and-play 3-way power splitter

**TLCEXT Series**

*Plug-and-Play Power Extension*

- Select from 24-, 36-, 48- and 96-inch lengths
- Male Plug Connector on one end, Female Plug Connector on other



**Model Number**

- TLCEXT24** 24 Inch power extension
- TLCEXT36** 36 Inch power extension
- TLCEXT48** 48 Inch power extension
- TLCEXT96** 96 Inch power extension

**24V SCREW-TIGHT CONNECTORS**

Screw-Tight Connectors not compatible with AFEX1012S, AFEX1016A, and AFEX1112BEAMS Mounting Channel Series

**AFCTITEL12-W**

*Screw-Tight Power Lead Connector*

- Includes 12-inch Plenum Rated Cable Power Lead and 3M™ VHB Adhesive Backing
- Length may be modified in field, see Installation Instructions for details
- Use to connect Power Lead to Strip Light
- 15/32"L x 15/32"W x 1/4"H
- Max Current: 10A



**Model Number**

- AFCTITEL12-W** Screw-tight connector with white CMP lead cable

**AFCTITEJ12-W**

*Screw-Tight Jumper Connector*

- Includes 12-inch Plenum Rated Cable Power Lead and 3M™ VHB Adhesive Backing
- Length may be modified in field, see Installation Instructions for details
- Use to connect two (2) sections of Strip Light
- 15/32"L x 15/32"W x 1/4"H
- Max Current: 10A



**Model Number**

- AFCTITEJ12-W** Screw-tight connector with white CMP jumper cable

**AFCTITEC**

*Screw-Tight In-line Connector*

- Use to connect two (2) sections of Strip Light in-line
- Includes 3M™ VHB Adhesive Backing
- 13/32"L x 15/32"W x 1/4"H
- Max Current: 10A



**Model Number**

- AFCTITEC** Screw-tight in-line connector

**AFCTITEX**

*Screw-Tight Corner Connector*

- Use to connect two (2) sections of Strip Light at a right angle
- Includes 3M™ VHB Adhesive Backing
- 9/32"L x 9/32"W x 1/4"H
- Max Current: 10A



**Model Number**

- AFCTITEX** Screw-tight corner connector



**Specflex**  
Architectural Strip Lighting

**AFSSCN Dry Location Series**

24V Static White, Continuous COB

**24V ACCESSORIES**

**Plenum Rated Cable**

*Two Conductor Plenum Rated Cable*

| Model Number     |      |                   |       |
|------------------|------|-------------------|-------|
| <b>CMP-2C-10</b> | 10Ft | <b>CMP-2C-30</b>  | 30Ft  |
| <b>CMP-2C-15</b> | 15Ft | <b>CMP-2C-50</b>  | 50Ft  |
| <b>CMP-2C-20</b> | 20Ft | <b>CMP-2C-100</b> | 100Ft |



**24V CONTROLLERS**

**TLPRTW**

*4-Channel Power Repeater*

- Enables synchronized control of multiple runs from one controller
- Use with Non-dimming LED Drivers
- Not UL Listed for outdoor use

| Model Number  |   |
|---------------|---|
| <b>TLPRTW</b> | 4-Channel Power Repeater<br>(5-5/16" L x 1-3/4" W x 1-1/8" D) |



**TLPINT**

*DMX 512 CV Decoder*

- Designed to convert universal DMX 512 signal to PWM signal when used with a DMX 512 console (by others)
- Use with Non-dimming LED Drivers
- Not UL Listed for outdoor use

| Model Number  |   |
|---------------|---|
| <b>TLPINT</b> | DMX 512 CV Decoder<br>(6-3/16" L x 3-1/8" W x 1-5/8" D) |



**TLPRGBRF**

*Dimming Controller with RF Remote Control*

- Pre-programmed functions include: Color Strobe, 3-Channel Color Change and Gradual Brightness Change. Includes two (2) programmable presets
- Use with Non-dimming LED Drivers
- Not UL Listed for outdoor use

| Model Number    |  |
|-----------------|--|
| <b>TLPRGBRF</b> | Dimming Controller w/ RF Remote Control<br>(8-3/8" L x 1-5/8" W x 1-3/16" D) |



**Specflex**  
Architectural Strip Lighting

**AFSSCN Dry Location Series**  
24V Static White, Continuous COB

**24V HARDWIRE LED DRIVERS**

**TLP24VHW Series**

*Hardwire Constant Voltage Driver*

- 120VAC Input / 24VDC Output
- Includes stripped and tinned wire pigtails on the input and output sides
- 1 Foot Wire Leads
- Class 2 Recognized
- MUST BE MAINTAINED WITHIN AN ENCLOSURE THAT MEETS LOCAL BUILDING CODES AND NEC (SUPPLIED BY OTHERS)

| Model Number      |                                      |
|-------------------|--------------------------------------|
| <b>TLP24VHW20</b> | 20W (5-3/4" L x 1-1/2" W x 1-1/4" H) |
| <b>TLP24VHW60</b> | 60W (6-1/3" L x 1-3/4" W x 1-1/4" H) |
| <b>TLP24VHW96</b> | 96W (6-1/8" L x 2-3/8" W x 1-1/2" H) |



**L3D0 Series**

*Hi-lume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade to Black™*

- 120-277VAC Input / 24VDC Output
- Enclosed Class 2 Listed Constant Voltage Driver
- 96W Max

| Model Number         |   |
|----------------------|---|
| <b>L3D0-96W24V-U</b> | 96W, 24V 120-277VAC (5.5" W x 2" H x 10.5" L) |



**TLP24VHW\*MVD-ENC Series**

*Hardwire Class 2 Constant Voltage Enclosed Driver*

- 120-277VAC Input / 24VDC Output
- Class 2 Listed Constant Voltage UL Listed Enclosed LED Driver
- Forward/Reverse Phase and 0-10V Dimming
- 0-10V Dimming delivers smooth flicker free linear dimming down to 1% with most LEDs and a wide variety of compatible dimmers
- No minimum load requirement. Over voltage, current, temperature, and short-circuit protection.

| Model Number              |  |
|---------------------------|--|
| <b>TLP24VHW60MVD-ENC</b>  | 60W, Forward/Reverse Phase and 0-10V Dimming Driver (8" L x 3-3/8" W x 1-1/4" D)     |
| <b>TLP24VHW100MVD-ENC</b> | 96W, Forward/Reverse Phase and 0-10V Dimming Driver (8-1/4" L x 4-1/8" W x 1-1/2" D) |



**TLP24VHW\*MV-ENC & TLP24VHW\*MVD2-ENC Series**

*Hardwire Class 2 Constant Voltage Enclosed Driver*

- 120-277VAC Input / 24VDC Output
- Class 2 Listed Constant Voltage UL Listed Enclosed LED Driver with built-in junction boxes; Wet Location Rated
- 0-10V Dimming and Non-dimming Models
- 0-10V Dimming Driver delivers smooth flicker free linear dimming down to 1% with most LEDs and a wide variety of compatible dimmers
- No minimum load requirement. Auto-reset protection for short circuit and over-temperature. Over load protection in CC mode.
- 12-1/8" L x 2-3/8" W x 1-3/8" D

| Model Number              |                           |
|---------------------------|---------------------------|
| <b>TLP24VHW60MV-ENC</b>   | 60W, Non-dimming Driver   |
| <b>TLP24VHW96MV-ENC</b>   | 96W, Non-dimming Driver   |
| <b>TLP24VHW60MVD2-ENC</b> | 60W, 0-10V Dimming Driver |
| <b>TLP24VHW96MVD2-ENC</b> | 96W, 0-10V Dimming Driver |



**24V PLUG-IN POWER SUPPLIES**

**TLP24VP Series**

*Plug-and-Play Power Supply*

- 120VAC Input / 24VDC Output
- Includes AC Wall Plug and Female Power Output Barrel Plug for easy installation
- Class 2 Listed

| Model Number     |                                      |
|------------------|--------------------------------------|
| <b>TLP24VP36</b> | 36W (4-1/4" L x 2" W x 1-3/8" H)     |
| <b>TLP24VP60</b> | 60W (4-1/2" L x 2" W x 1-3/8" H)     |
| <b>TLP24VP96</b> | 96W (6-1/8" L x 2-3/8" W x 1-1/2" H) |



**Specflex**  
Architectural Strip Lighting

**AFSSCN Dry Location Series**  
24V Static White, Continuous COB

**PRODUCT SPECIFICATIONS**

**CONSTRUCTION**

- Continuous Density Flex Strip: Continuous COB
- 3-Ounce Copper Construction provides excellent heat dissipation and reduced voltage drop
- Full Reels have 72-inch Soldered Lead sheathed in a Plenum Rated Cable rated to 90°C min.

**LEDs**

- **Color Temperature:**  
2100K, 2400K, 2700K, 3000K  
Consult factory for additional CCT options
- **CRI:**  
90+
- **Color Consistency:**  
<3 SDCM

**ELECTRICAL**

- **Input Voltage:**  
24VDC
- **Average Power Consumption/Wattage:**  
4.6W per Foot
- **Dimming:**  
Forward / Reverse Phase and 0-10V Dimming
- **Ambient Operating Temp:**  
-25° to 40°C (-13° to 104°F)
- System designed and rated for 50,000 hours at 70% lumen maintenance
- Drivers and Controllers ordered separately

**INSTALLATION**

- Includes 3M™ 300LSE Adhesive Backing for strong adhesion to channels and most smooth surfaces
- Wide selection of Aluminum Mounting Channels are available with or without a Lens, Lens sold separately
- Mounting Channels simplify installation and provide a uniform surface for strip adhesion and thermal management
- Channel Endcaps are available to create a finished appearance to the run; open or closed Endcaps are sold separately
- Mounting Clips available in packs of four (4); includes screws and dry-wall anchors for surface mounting, sold separately
- All Mounting Channels are field cuttable

**OPTICS**

- Create five (5) Beam Distributions (25 degrees to 78 degrees) using the Beam Focusing Optic (AFL1112BEAMS Series) and Channel with Insert (AFEX1112BEAMS Series)
- Optic and Mounting Channel (includes Insert) ordered separately
- Adjustable Mounting Clips available in packs of six (6); includes screws and dry-wall anchors for surface mounting, sold separately

**CERTIFICATIONS**

- cCSAus Listed to UL and CSA Standards
- IP20 Rated, suitable for Dry Locations
- Wet Location options available; see AFSSCN Series Wet Location Specification Sheet
- Declare Listed
- RoHS Compliant
- Closet Rated when used with Channel, Endcaps, and Lens

**WARRANTY**

- Covered by ConTech's full replacement guarantee after date of purchase:
  - Five (5) year replacement after date of purchase when installed within Mounting Channel
  - Three (3) year replacement after date of purchase when installed without Mounting Channel



**SpecFlex Architectural Striplight**  
**ConTech Lighting**

**Final Assembly:** Northbrook, Illinois, USA  
**Life Expectancy:** 5 Year(s)  
**End of Life Options:** Recyclable (35%), Landfill (65%)

**Ingredients:**

Aluminum; Copper; Carbonic acid, polymer with 4,4'-(1-methylethylidene)bis[phenol]; Polyvinyl chloride; Vinyl fluoride-Vinylidene fluoride-Chlorotrifluoroethylene copolymer; RTV silicone rubber; Ethylene glycol monomethyl ether; Tin, Organic; Plastiquinone; 1,3-Isobenzofurandione, polymer with 2,5-furandione and 2,2'-oxybis[ethanol]; Gold; Titanium dioxide; Silver; Diethylene Glycol

**Living Building Challenge Criteria:**

**I-13 Red List:**

|  |                             |
|--|-----------------------------|
| <input type="checkbox"/> LBC Red List Free     | % Disclosed: 100% at 100ppm |
| <input type="checkbox"/> LBC Red List Approved | VOC Content: Not Applicable |
| <input checked="" type="checkbox"/> Declared   |                             |

**I-10 Interior Performance:** Not Applicable  
**I-14 Responsible Sourcing:** Not Applicable

CNT-0004  
EXP. 01 JUN 2025  
Original Issue Date: 2024

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY  
INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](http://living-future.org/declare)

**Specflex** | **AFSSCN Dry Location Series**  
 Architectural Strip Lighting | 24V Static White, Continuous COB

**PHOTOMETRICS**



**AFSSCN-530K: 24V Dry Location SpecFlex Static White Strip Light**

4.6W/Ft, Continuous COB, 1-Foot Strip, 3076K, 90 CRI

Fixture Delivered Lumens: 431.7  
 Total Watts@24V: 4.7  
 Lumens Per Watt: 91.8  
 Center Beam Candle Power: 121  
 Beam Distribution: 150°  
 Spacing Criterion: 1.33

LM-63 Test No. G22042901  
 LM-79 Test No. S22042903

| Intensity Distribution |                  |                 |
|------------------------|------------------|-----------------|
| DISTANCE (FT.)         | FOOTCANDLES (FC) | BEAM DIA. (FT.) |
| 2 FT                   | 30.4             | 15.0            |
| 4 FT                   | 7.6              | 29.9            |
| 6 FT                   | 3.4              | 44.9            |
| 8 FT                   | 1.9              | 59.9            |
| 10 FT                  | 1.2              | 74.8            |
| 12 FT                  | 0.8              | 89.8            |

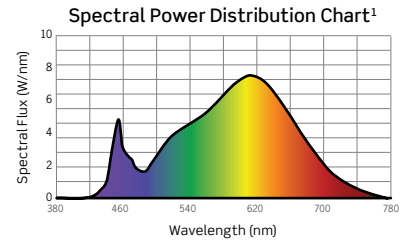

1. Colors Present within the Light Source





| CCT MULTIPLIERS |       |       |       |
|-----------------|-------|-------|-------|
| 2400K           | 2700K | 3000K | 4000K |
| 0.96            | 0.98  | N/A   | 1.05  |

**AFSSCN-530K TM-30 DATA**

ANSI/IES TM-30-18 Color Rendition Report Test No. S22042903

Colors are for visual orientation purposes only

|                 |         |
|-----------------|---------|
| R <sub>f</sub>  | 90      |
| R <sub>g</sub>  | 98      |
| CCT (K)         | 3076K   |
| D <sub>uv</sub> | -0.0003 |
| u'              | 0.2480  |
| v'              | 0.5195  |

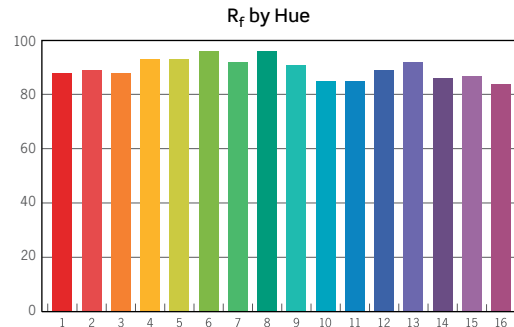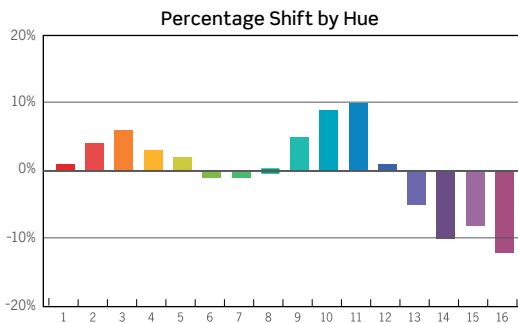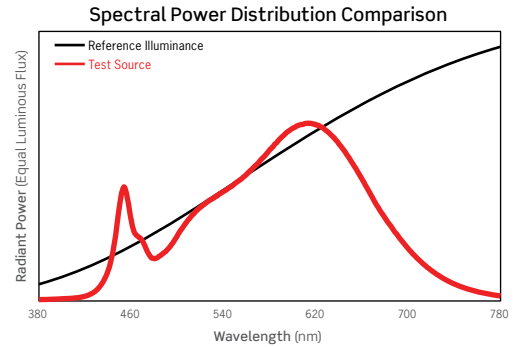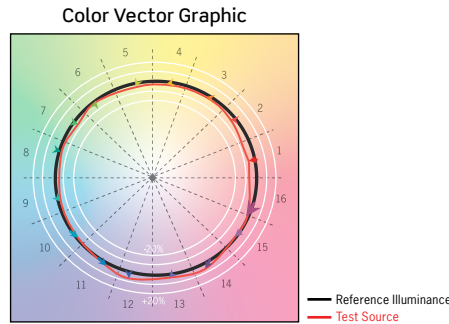

| HUE BIN              | 1  | 2  | 3  | 4  | 5  | 6   | 7   | 8  | 9  | 10 | 11  | 12 | 13  | 14   | 15  | 16   |
|----------------------|----|----|----|----|----|-----|-----|----|----|----|-----|----|-----|------|-----|------|
| HUE SHIFT            | 1% | 4% | 6% | 3% | 2% | -1% | -1% | 0% | 5% | 9% | 10% | 1% | -5% | -10% | -8% | -12% |
| R <sub>f</sub> VALUE | 88 | 89 | 88 | 93 | 93 | 96  | 92  | 96 | 91 | 85 | 85  | 89 | 81  | 85   | 87  | 84   |

**Specflex** | **AFSSCN Dry Location Series**  
 Architectural Strip Lighting | 24V Static White, Continuous COB

**PHOTOMETRICS**

**AFSSCN-530K + AFEX1112BEAMS + AFL1112BEAMS: 24V Dry Location SpecFlex Strip Light**

4.6W, Continuous, 1-Foot Strip, 3076K, 90 CRI  
 Using the Beam Focusing Mounting Channel and Frosted Diffusion Optic combined with the included Channel Insert to achieve tested Beam Spread

**Grazer**

LM-63 Test No. G24043006




No Insert

Fixture Delivered Lumens: 192.9  
 Total Watts@24V: 4.6  
 Lumens Per Watt: 41.9  
 Center Beam Candle Power: 198  
 Beam Distribution: 25°  
 Spacing Criterion: 0.42

**Intensity Distribution**

| DISTANCE (FT.) | FOOTCANDLES (FC) | BEAM DIA. (FT.) |
|----------------|------------------|-----------------|
| 2 FT           | 49.4             | 0.9             |
| 4 FT           | 12.3             | 1.8             |
| 6 FT           | 5.5              | 2.6             |
| 8 FT           | 3.1              | 3.5             |
| 10 FT          | 2.0              | 4.4             |
| 12 FT          | 1.4              | 5.3             |

**Candela Curve**



**Narrow**

LM-63 Test No. G24050101




Fixture Delivered Lumens: 261.1  
 Total Watts@24V: 4.6  
 Lumens Per Watt: 56.8  
 Center Beam Candle Power: 196  
 Beam Distribution: 43°  
 Spacing Criterion: 0.68

**Intensity Distribution**

| DISTANCE (FT.) | FOOTCANDLES (FC) | BEAM DIA. (FT.) |
|----------------|------------------|-----------------|
| 2 FT           | 49.0             | 1.6             |
| 4 FT           | 12.2             | 3.2             |
| 6 FT           | 5.4              | 4.8             |
| 8 FT           | 3.1              | 6.4             |
| 10 FT          | 2.0              | 8.0             |
| 12 FT          | 1.4              | 9.6             |

**Candela Curve**



**Medium**

LM-63 Test No. G24050103




Fixture Delivered Lumens: 287.0  
 Total Watts@24V: 4.6  
 Lumens Per Watt: 62.4  
 Center Beam Candle Power: 188  
 Beam Distribution: 53°  
 Spacing Criterion: 0.82

**Intensity Distribution**

| DISTANCE (FT.) | FOOTCANDLES (FC) | BEAM DIA. (FT.) |
|----------------|------------------|-----------------|
| 2 FT           | 46.9             | 2.0             |
| 4 FT           | 11.7             | 4.0             |
| 6 FT           | 5.2              | 6.0             |
| 8 FT           | 2.9              | 8.0             |
| 10 FT          | 1.9              | 10.0            |
| 12 FT          | 1.3              | 12.0            |

**Candela Curve**



**Flood**

LM-63 Test No. G24050102




Fixture Delivered Lumens: 304.7  
 Total Watts@24V: 4.6  
 Lumens Per Watt: 66.2  
 Center Beam Candle Power: 174  
 Beam Distribution: 65°  
 Spacing Criterion: 0.97

**Intensity Distribution**

| DISTANCE (FT.) | FOOTCANDLES (FC) | BEAM DIA. (FT.) |
|----------------|------------------|-----------------|
| 2 FT           | 43.4             | 2.5             |
| 4 FT           | 10.9             | 5.1             |
| 6 FT           | 4.8              | 7.6             |
| 8 FT           | 2.7              | 10.2            |
| 10 FT          | 1.7              | 12.7            |
| 12 FT          | 1.2              | 15.3            |

**Candela Curve**



**Wide Flood**

LM-63 Test No. G24050104




Fixture Delivered Lumens: 324.8  
 Total Watts@24V: 4.6  
 Lumens Per Watt: 70.6  
 Center Beam Candle Power: 163  
 Beam Distribution: 78°  
 Spacing Criterion: 1.10

**Intensity Distribution**

| DISTANCE (FT.) | FOOTCANDLES (FC) | BEAM DIA. (FT.) |
|----------------|------------------|-----------------|
| 2 FT           | 40.8             | 3.2             |
| 4 FT           | 10.2             | 6.5             |
| 6 FT           | 4.5              | 9.7             |
| 8 FT           | 2.6              | 12.9            |
| 10 FT          | 1.6              | 16.1            |
| 12 FT          | 1.1              | 19.4            |

**Candela Curve**



| CCT MULTIPLIERS |       |       |       |
|-----------------|-------|-------|-------|
| 2400K           | 2700K | 3000K | 4000K |
| 0.96            | 0.98  | N/A   | 1.05  |

# Specflex

Architectural Strip Lighting

# AFSSCN Dry Location Series

24V Static White, Continuous COB

## DIMMING SPECIFICATIONS LED Drivers have been tested with the following Dimmer Models:

### TRIAC (LEADING EDGE) DIMMING

| Manufacturer | Product          | Model                          |
|--------------|------------------|--------------------------------|
| Leviton      | SureSlide        | 6672, 6674, 6674N, 66DF        |
|              | Decora Smart     | D26HD, D2MSD, DN6HD            |
|              | Decora Digital   | DDL06-1, DDM06, DDL06-1, DDMX1 |
|              | Decora Slide     | DSL06, DSM10                   |
|              | Illumatech       | IPL06                          |
|              | Trimatron Rotary | RDL06, RNL06                   |
|              | Toggle Slide     | TSL06, TSM10                   |
| Lutron       | Caseta           | PD-6WCL                        |
|              | Diva             | DVCL-153P                      |
|              | Lumea            | LECL-153P                      |
|              | Maestro          | MACL-153M                      |
|              | Skylark          | SCL-153P                       |
|              | Toggler          | TGCL-153P                      |

### ELV (TRAILING EDGE) DIMMING

| Manufacturer | Product        | Model         |
|--------------|----------------|---------------|
| Leviton      | Decora Digital | DDE06         |
| Lutron       | Diva           | DVELV-300P-WH |
|              | Skylark        | SELV-300P-WH  |

### 0-10V DIMMING

| Manufacturer | Product    | Model                                  |
|--------------|------------|--|
| Leviton      | IllumaTech | IP710-DLX, IP710-LFZ                   |
| Lutron       | Diva       | DVSCSTV, DVSCSTV, DVSTV, DDTV, DDTV-WH |

- Testing has been performed on these Dimmers, but this does not imply any warranty of compatibility
- Dimming performance can be influenced by different Loads, as well as variations in Dimmer Switches within the same Model
- Dimmer Maximum Load Rating with LED may differ from published Traditional Source Dimmer Ratings; consult manufacturer for maximum dimmer information
- Consult factory for additional dimming information

## MAX RUN LENGTH

INPUT = 24VDC

| LED Driver | AFSSCN-5       |
|------------|----------------|
| Wattage    | Max Run Length |
| 20W        | 4 FT           |
| 36W        | 7 FT           |
| 60W        | 11 FT          |
| 96W        | 16 FT          |

- Max Run refers to the total single run of Strip Light that can go on a Driver
- Max Run Lengths are calculated with 24V DC at the start of the Strip Light run. Voltage drop may occur if not using proper wire gauge. Refer to the Voltage Drop and Wire Length Distance chart.
- Max Run lengths above are calculated with no more than 30% light loss from the start of the Strip Light run to the end of the Strip Light run for optimal light consistency. If run lengths are extended beyond the recommended lengths noted above, there will be inconsistent light output and voltage drop.
- Overall distance of Strip Light under load (lit length). If exceeded, damage to the Driver and Strip Light may result.

## VOLTAGE DROP AND WIRE LENGTH DISTANCE

3% VOLTAGE DROP

| Wire Gauge | 20W    | 30W    | 36W    | 60W    | 96W   |
|------------|--------|--------|--------|--------|-------|
| 22 AWG     | 27 FT  | 18 FT  | 15 FT  | 9 FT   | 5 FT  |
| 20 AWG     | 43 FT  | 28 FT  | 24 FT  | 14 FT  | 9 FT  |
| 18 AWG     | 68 FT  | 45 FT  | 38 FT  | 23 FT  | 14 FT |
| 16 AWG     | 109 FT | 72 FT  | 60 FT  | 36 FT  | 23 FT |
| 14 AWG     | 174 FT | 115 FT | 95 FT  | 57 FT  | 36 FT |
| 12 AWG     | 272 FT | 181 FT | 151 FT | 90 FT  | 57 FT |
| 10 AWG     | 432 FT | 288 FT | 240 FT | 144 FT | 90 FT |

The Voltage Drop/Wire Length Distance Chart provides general guidelines for determining wire gauge based on total load and distance from the Driver to the beginning of the Strip Light run.