




For ConTech Lighting Odyssey Line Voltage Track Adapter with Triac LED Dimming Driver for CRS5 Quick Release LED Mini Pendant: **CRS5-ODYQRD**


INSTALLATION PROCEDURES


- 1. Lift the latch for the rail connection/ballast compartment. (Figure 1)
- With the door open, the top portion of the compartment is the Odyssey Flexible Track connection, the bottom portion of the compartment is the housing for the 120V LED Driver. (Figure 2)
- 3. Line up the fixture compartment to match the ground, line and neutral connections on the flexible track, the flexible track snaps into place. (Figure 3)
- 4. After the flexible track is inserted properly, close the compartment door and shut the latch so the smooth portion of the flexible track is by the latch. The grooved portion of the flexible track is by the star screw.
- 5. The pendant can now be installed by inserting the Quick Disconnect plug from pendant into canopy, twist knurled ring to tighten and secure. For additional pendant installation details, please refer to the CRS5 LED Mini Pendant installation instructions
- 6. Turn power on to verify proper connections.

IMPORTANT SAFETY INSTRUCTIONS:

- Read all the instructions before installation. Save instructions for later use.
- Turn off power at fuse or circuit breaker box before installation or before doing any maintenance work.
- Do not exceed the nominal supply voltage or amperage rating.
- Do not install any lampholder closer than 6" from any curtain or similar combustible material.
- **Warning:** Risk of burns. Lamps are extremely hot when lit. Allow lamps to cool down in temperature before handling.
- Product must be mounted in locations and at heights and in a manner consistent with its intended use, and in compliance with National Electrical Code and local codes. Use of accessory equipment is not recommended.
- Installing contrary to instructions may cause unsafe conditions.
- Warning: Risk of fire. Most dwellings built before 1985 have supply wire rated at 60°C. Consult a qualified electrician before installation.
- To avoid hazards to children, account for all parts and properly dispose of all packing materials.
- Call the Technical Support department at ConTech Lighting with any installation questions: 847.559.5500.



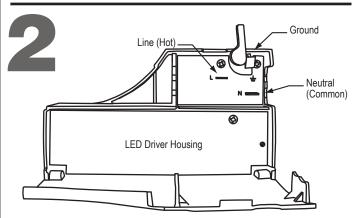

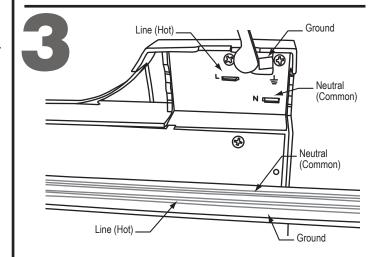

All specifications subject to change without notice. For ConTech's limited product warranty, go to www.contechlighting.com. For a printed copy of the warranty, call 1-847-559-5500.