

## INSTALLATION INSTRUCTIONS | CRS8 Odyssey Line Voltage Track Adapter: CRS8-ODYQRD (TRIAC Dimming)

**Note:** Before attempting installation please refer to your local electrical code.


### IMPORTANT SAFETY INSTRUCTIONS

- Read all the instructions before installation. Save instructions for later use.
- Turn off power at fuse or circuit breaker box before installation of before doing any maintenance work.
- Wear rubber soled shoes and work should be done on a sturdy wooden or non-conductive ladder.
- Product must be mounted in locations and at heights in a manner consistent with its intended use and in compliance with National Electrical Code and local building codes. For indoor use only.
- Product must be grounded to avoid potential electric shock and any other potential hazards.
- Do not exceed the nominal supply voltage or amperage ratings.
- Make sure all screws are properly tightened.
- Do not install any lamp holder closer than 6-inches from any curtain or similar combustible material.
- Use only fixtures and fittings intended for use with ConTech Decorative Stemlight Pendant systems.
- Installing contrary to instructions may cause unsafe conditions.
- **WARNING:** Risk of fire. Most dwellings built before 1985 have supply wire rated at 60°C. Consult a qualified electrician before installation.
- **WARNING:** Risk of burns. Lamps are extremely hot when lit. Allow lamps to cool down in temperature before handling.
- To avoid hazards to children, account for all parts and properly dispose of all packing materials.
- Call the Technical Support department at ConTech Lighting with any installation questions: 847-559-5500.

### INSTALLATION |


**FIGURE 1**

Lift the latch for the rail connection/ballast compartment

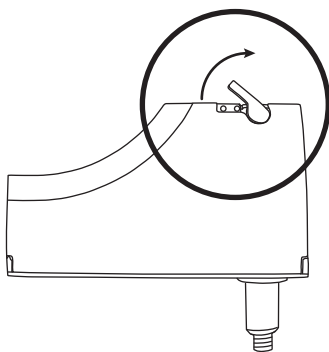

**FIGURE 2**

The top portion of the inner compartment is the Odyssey Flexible Track connection, the bottom portion of the inner compartment is the 120V LED Driver housing.

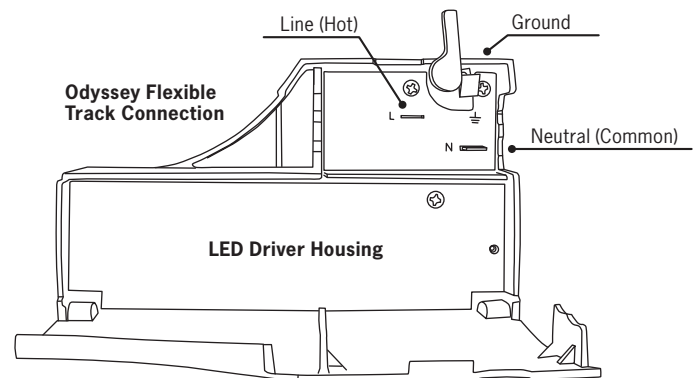


**FIGURE 3**

- Line up the luminaire compartment to match the ground, line and neutral connections on the flexible track, the flexible track will snap into place
- After the flexible track is inserted properly, close the compartment door and shut the latch so the smooth portion of the flexible track is by the star screw.

- Pendant can now be installed. Insert the Quick Disconnect plug from pendant into canopy, twist knurled ring to tighten and secure.
- Turn power on to verify proper connections

For additional pendant installation details, refer to the CRS8 LED Pendant installation instructions.

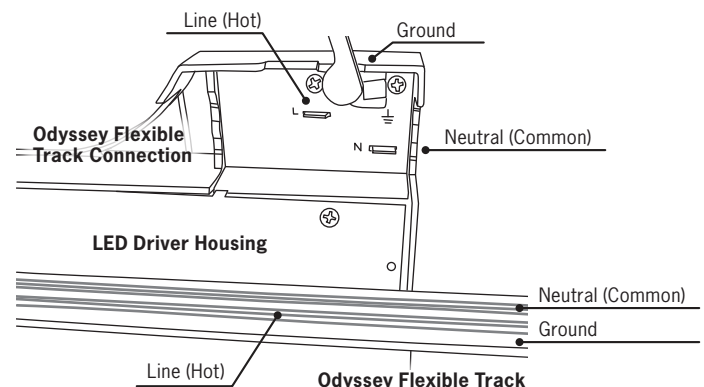

All specifications subject to change without notice. For ConTech's limited product warranty, go to [www.contechlighting.com](http://www.contechlighting.com). For a printed copy of the warranty, call 1-847-559-5500.

CONTECH LIGHTING | 725 LANDWEHR ROAD | NORTHBROOK, ILLINOIS 60062 | PHONE 847.559.5500 | [www.contechlighting.com](http://www.contechlighting.com)

©2022 Conservation Technology of Illinois, LLC. All rights reserved. Note: Specifications subject to change without notice.

CRS8ODYQRDINST REV0222