


**CTL93C SERIES** | Gallery M Canopy Mount Luminaire featuring Xicato® LED



High performance track luminaire delivering high outputs and superior beam control

- Clean aesthetics, simple cylinder form
- Delivering up to 2400 Lumens
- Multiple beam distributions
- Xicato 95CRI Series COB

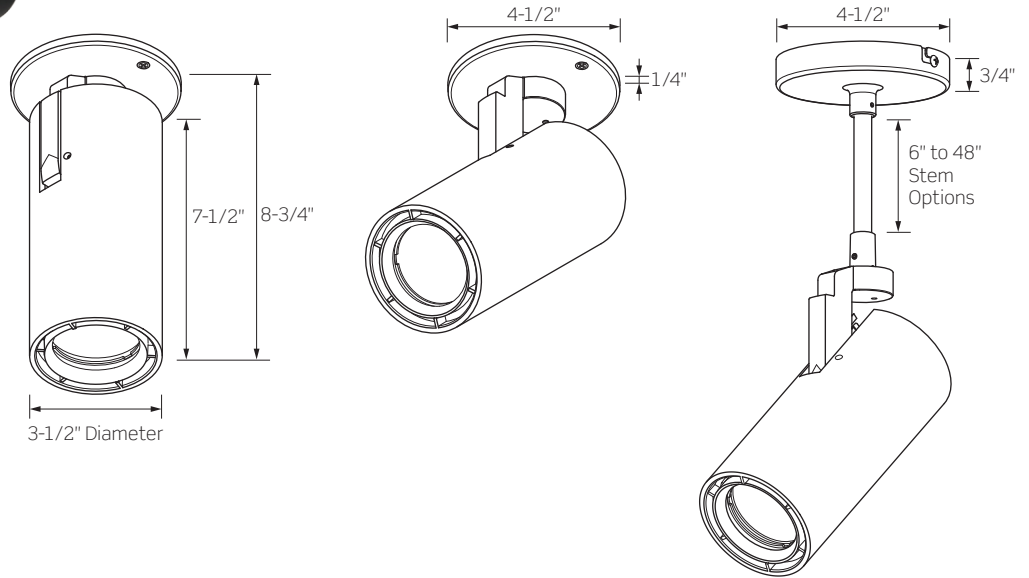

	CTL931C	CTL932C	CTL933C	CTL934C	CTL935C
WATTAGE	10W	14W	19W	28W	35W
LUMEN OUTPUT <sup>1</sup> BY BEAM SPREAD					
Narrow Spot (12°)	723Lm	990Lm	1324Lm	N/A	N/A
Spot (15°)	661Lm	920Lm	1276Lm	1716Lm	2131Lm
Medium Flood (35°)	745Lm	1038Lm	1439Lm	1935Lm	2403Lm
Flood (52°)	744Lm	1036Lm	1437Lm	1931Lm	2399Lm
Wide Flood (79°)	691Lm	963Lm	1335Lm	1794Lm	2229Lm
COLOR TEMPERATURE	2700K / 3000K / 3500K / 4000K				
CRI	95				
FINISHES	Matte Black / Matte White / Matte Silver				
DRIVER INPUT VOLTAGE	120V/277V, 50/60Hz				
DIMMING TYPE	120V Forward/Reverse Phase or 120V/277V 0-10V Dimming				
MOUNTING	Canopy option for ceiling or wall mount. Rigid Stem option for ceiling mount only.				
LISTINGS	cCSAus Certified for use in the U.S. and Canada; Suitable for Dry Locations				
WARRANTY	Five (5) year replacement after date of purchase				
SYSTEM RATING	50,000 Hours @ 70% Lumen Maintenance				

1. Approximate lumen output based on 3000K performance; see photometric test results for additional information

## CTL93C SERIES | Gallery M Canopy Mount Luminaire featuring Xicato® LED

### ORDERING INFORMATION

Example Order: CTL932CRSSP3XCMVD-P

LED Series	Mounting Options	Beam Option	CCT/CRI	Driver	Finish	Alternate Stems	Finish
<b>CTL931</b> 10W <b>CTL932</b> 14W <b>CTL933</b> 19W <b>CTL934</b> 28W <b>CTL935</b> 35W	<b>C</b> Mono-Point Canopy  <b>CRS<sup>2</sup></b> Mono-Point Canopy with 6" Rigid Stem	<b>NS<sup>3</sup></b> Narrow Spot: 13° Beam / 26° Field  <b>SP</b> Spot: 18° Beam / 42° Field  <b>MF</b> Medium Flood: 35° Beam / 57° Field  <b>FL</b> Flood: 51° Beam / 64° Field  <b>WF</b> Wide Flood: 80° Beam / 102° Field	95 CRI <b>27XC</b> 2700K <b>3XC</b> 3000K <b>35XC</b> 3500K <b>4XC</b> 4000K	<b>MVD</b> 120V Forward/Reverse Phase Dimming OR 120V/277V 0-10V Dimming	<b>B</b> Matte Black <b>P</b> Matte White <b>S</b> Matte Silver	<b>12-STEM-A</b> 12-In. <b>18-STEM-A</b> 18-In. <b>24-STEM-A</b> 24-In. <b>30-STEM-A</b> 30-In. <b>36-STEM-A</b> 36-In. <b>48-STEM-A</b> 48-In.	<b>B</b> Matte Black <b>P</b> Matte White <b>S</b> Matte Silver


2. CRS Option includes 6-inch Rigid Stem and field cuttable wiring for Stem lengths up to 48-inches  
 3. Narrow Spot (NS) Beam is only available for Series 1 (10W) through Series 3 (19W)

### ACCESSORY & REPLACEMENT OPTIC ORDERING INFORMATION

Each Gallery M Luminaire may hold up to two (2) pieces of Media **OR** one (1) Snoot or Barn Door Assembly plus one (1) piece of Media



**Snoot**  
with *Optional Cross Blades*  
Exterior painted per finish selection: Black (B), White (P) or Silver (S). Interior and Cross Blades are always Black.



**Barn Doors**  
Black finish. Barn Doors may hold one LF18 Lens or LA-35 Honeycomb Louver.



**Honeycomb Louver**  
Black finish


Accessory
<b>FA-93</b> Snoot with optional Cross Blades

Finish
<b>B</b> Matte Black
<b>P</b> Matte White
<b>S</b> Matte Silver

Accessory
<b>BD93</b> Barn Doors

Finish
<b>B</b> Matte Black

Accessory
<b>FA-16-60MM</b> 2-3/8-In. Black Honeycomb Louver
<b>LA-35</b> 3-1/16-In. Black Honeycomb Louver for use within Barn Doors only

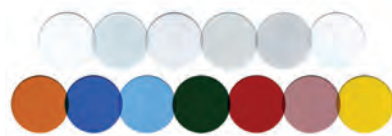

**Tempered Glass Filters and Lenses**  
1/8-Inch Thick, typ.

Accessory
<b>LF16</b> Tempered Glass Filters and Lenses
<b>LF18</b> Tempered Glass Filters and Lenses for use within Barn Doors only

Finish	
<b>C</b> Clear	<b>A</b> Amber
<b>SL</b> Soft Light	<b>B</b> Blue
<b>SOL</b> Solite	<b>LB</b> Light Blue
<b>LS</b> Linear Spread	<b>G</b> Green
<b>73</b> Spread	<b>R</b> Red
<b>UV</b> Optivex UV	<b>RO</b> Rose
	<b>Y</b> Yellow

Size
<b>60MM</b> 2-3/8-Inch
<i>Leave Blank</i> 3-1/16-Inch LF18 Series for use within Barn Doors only

Replacement Optics
<b>CTL93XOPT-NS<sup>3</sup></b> Narrow Spot Replacement 13° Beam / 26° Field
<b>CTL93XOPT-SP</b> Spot Replacement 18° Beam / 42° Field
<b>CTL93XOPT-MF</b> Medium Flood Replacement 35° Beam / 57° Field
<b>CTL93XOPT-FL</b> Flood Replacement 51° Beam / 64° Field
<b>CTL93XOPT-WF</b> Wide Flood Replacement 80° Beam / 102° Field

3. Narrow Spot (NS) Beam is only available for Series 1 (10W) through Series 3 (19W)

# CTL93C SERIES | Gallery M Canopy Mount Luminaire featuring Xicato® LED

## PRODUCT SPECIFICATIONS

### PERFORMANCE SUMMARY

- The Xicato 95 CRI Series COBs are designed to perfectly emulate natural light sources, with precise color rendering by CIE or IES standards, for the most exacting illumination of art, architecture, or other surfaces
- 2700K, 3000K, 3500K and 4000K Color temperatures, all with 95 CRI
- Xicato Modules feature extraordinary color consistency within 1x2-step MacAdam ellipse
- Precise beam control ensures that even at lower aiming angles the luminaire is glare free and quiet in the ceiling
- Full collection of accessories available to produce a myriad of filtering and framing effects
- Dimming is standard for all wattage options using compatible 120V Forward or Reverse OR 120V/277V 0-10V Dimming systems. For dimmer compatibility and performance, refer to the Dimming Specifications below.
- Mono-Point Canopy Housing with Rigid Stem is constructed of cast aluminum, ceiling mount only. Includes 6-inch Rigid Stem, alternate Stem lengths may be ordered separately. Field cuttable wiring included for up Stem length to a 48-inches.
- Locking mechanisms for Tilt (0° to 91°) and Rotation (365°)
- Five (5) Beam Distributions available: 13° Narrow Spot, 18° Spot, 35° Medium Flood, 51° Flood, and 80° Wide Flood
- Optics are field interchangeable (with restrictions) and provide smooth, striation-free beams
- Optics are field interchangeable (with restrictions) and provide smooth, striation-free beams
- Luminaire may accept up to two (2) pieces of media (Lens or Louver), one (1) Snoot/Barn Door Assembly plus one (1) piece of media (Lens or Louver). Consult ordering information for proper combinations and sizes.  
**NOTE: Luminaire** may hold one (1) LF16 60MM Series Lens or FA-16-60MM Louver;  
**Barn Doors** may hold one LF18 Series Lens or LA-35 Louver
- Fixture weight: 3 LBS

### CONSTRUCTION

- A revolutionary track head with superior optics designed to bring theatre grade beam control to traditional gallery and commercial track heads
- Constructed of die-cast aluminum, the cylindrical body provides thermal management for the luminaire
- Mono-Point Canopy Housing is constructed of cast aluminum, may be ceiling or wall mounted

## DIMMING SPECIFICATIONS

- Incandescent 120V AC Dimmers adjust the light with *Forward Phase Control*, where the Dimmer “chops” the forward part of the AC Wave to deliver less or more power to the light source. No Neutral Wire Connection required.
- Electronic Low Voltage 120V AC Dimmers adjust the light with *Reverse Phase Control*, where the Dimmer “chops” the back part of the AC Wave to deliver less or more power to the light source. Neutral Wire Connection required.
- 0-10V Dimming may be used for 120V or 277V powered Luminaires by delivering a separate controlled DC voltage signal which adjusts the light output.

FORWARD/REVERSE PHASE COMPATIBLE DIMMERS			
MANUFACTURER	PRODUCT	MODEL	LIGHT OUTPUT
Leviton	Vizia	VPE06	4%-100%
Leviton	Decora	6673-10W	11%-100%
Lutron	Ariadni	TGCL-153P	0%-100%
Lutron	Diva	DVCL-153P	0%-100%
Lutron	Diva	DVELV303P	3%-100%
Lutron	Skylark	SELV300P	3%-100%
Lutron	Maestro	MAELV600	0%-100%
Lutron	Faetra	FAELV500	7%-100%
Lutron	Skylark C	SCL-153P	0%-100%
Lutron	Maestro C•L	MACL-153M	0%-99%
Lutron	RA2 Select	RRD-6CL	2%-98%

0-10V COMPATIBLE DIMMERS			
MANUFACTURER	PRODUCT	MODEL	LIGHT OUTPUT
Leviton	IllumaTech	IP710-DL	5% to 100%
Lutron	Diva	DVTV	5% to 100%
Lutron	Nova	NFTV	5% to 100%

### NOTES

1. If light is measured, then the dimming range is based on light output. If light is not measured, then the dimming range is based on the percentage of output current.
2. Testing was performed with a single fixture connected to dimmer.
3. Testing has been performed on these dimmers, but this does not imply any warranty of compatibility.
4. Dimming performance can be influenced by different loads, as well as variations in dimmer switches within the same model.
5. Dimmer maximum load rating with LED may differ from published traditional source dimmer ratings. Consult manufacturer for maximum dimmer information.
6. Consult factory for additional dimming information.



**CTL93 SERIES** | Gallery M Track Luminaire Xicato® LED Photometry

**CTL93NS3XCD: 19W, 3000K, 95 CRI, NARROW SPOT BEAM**

Test No. G25090403

Fixture Delivered Lumens: 1324.29  
 Total Watts@120V: 20.3  
 Lumens Per Watt: 64.24  
 Center Beam Candle Power: 16112  
 Beam Distribution: 12.8°  
 Spacing Criterion: 0.24  
 Color Rendering Index (CRI)<sup>1</sup>: 97.8  
 Color Temperature (CCT)<sup>2</sup>: 2938K  
 Designed for 50,000 Hour Lamp Life<sup>3</sup>

Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	1007.0	0.9
6 FT	447.6	1.4
8 FT	251.8	1.8
10 FT	161.1	2.3
12 FT	111.9	2.7
14 FT	82.2	3.2

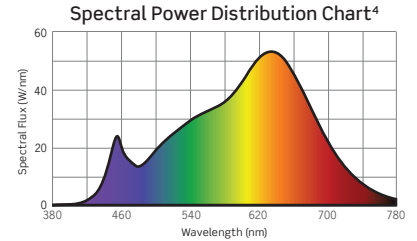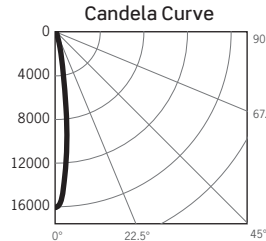



NARROW SPOT BEAM OUTPUT MULTIPLIERS	
10W	14W
0.55	0.75

**CTL935SP3XCD: 35W, 3000K, 95 CRI, SPOT BEAM**

Test No. G25082701

Fixture Delivered Lumens: 2131.04  
 Total Watts@120V: 34.7  
 Lumens Per Watt: 61.41  
 Center Beam Candle Power: 11703  
 Beam Distribution: 18.2°  
 Spacing Criterion: 0.36  
 Color Rendering Index (CRI)<sup>1</sup>: 97.8  
 Color Temperature (CCT)<sup>2</sup>: 2938K  
 Designed for 50,000 Hour Lamp Life<sup>3</sup>

Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	731.5	1.3
6 FT	325.1	1.9
8 FT	182.9	2.6
10 FT	117.0	3.2
12 FT	81.3	3.9
14 FT	59.7	4.5

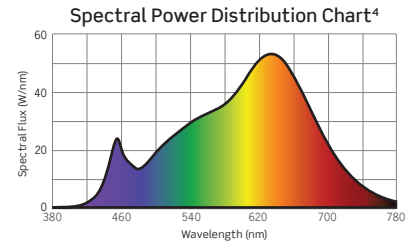
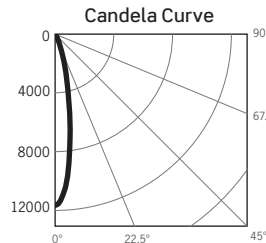


**CTL935MF3XCD: 35W, 3000K, 95 CRI, MEDIUM FLOOD BEAM**

Test No. G25082605

Fixture Delivered Lumens: 2403.31  
 Total Watts@120V: 34.7  
 Lumens Per Watt: 69.26  
 Center Beam Candle Power: 6507  
 Beam Distribution: 35.5°  
 Spacing Criterion: 0.55  
 Color Rendering Index (CRI)<sup>1</sup>: 97.8  
 Color Temperature (CCT)<sup>2</sup>: 2938K  
 Designed for 50,000 Hour Lamp Life<sup>3</sup>

Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	406.7	2.6
6 FT	180.7	3.8
8 FT	101.7	5.1
10 FT	65.1	6.4
12 FT	45.2	7.7
14 FT	33.2	9.0

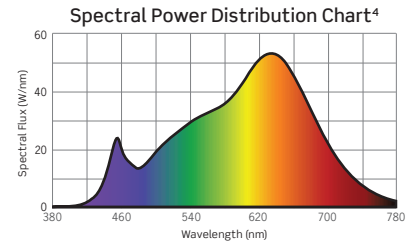

OUTPUT MULTIPLIERS			
10W	14W	19W	28W
0.31	0.43	0.60	0.81

1. Accuracy of Rendering Colors 2. Color Appearance of Light Source 3. Dependent on Surrounding Temperatures 4. Colors Present within the Light Source

**PHOTOMETRIC MULTIPLICATION FACTORS**

Lumen output values fluctuate based on Color Temperature (CCT), Color Rendering Index (CRI), and Luminaire Wattage/Output. To estimate lumen output of the various options, multiply the 3000K standard CRI results by the following:

CCT MULTIPLIERS	
CCT	95 CRI
2700K	0.92
3000K	1.00
3500K	1.05
4000K	1.10



## CTL93 SERIES | Gallery M Track Luminaire Xicato® LED Photometry

### CTL935FL3XCD: 35W, 3000K, 95 CRI, FLOOD BEAM

Test No. G25082604

Fixture Delivered Lumens: 2398.7  
 Total Watts@120V: 34.8  
 Lumens Per Watt: 68.93  
 Center Beam Candle Power: 3637  
 Beam Distribution: 51.1°  
 Spacing Criterion: 0.72  
 Color Rendering Index (CRI)<sup>1</sup>: 97.8  
 Color Temperature (CCT)<sup>2</sup>: 2938K  
 Designed for 50,000 Hour Lamp Life<sup>3</sup>

Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	227.3	3.8
6 FT	101.0	5.7
8 FT	56.8	7.6
10 FT	36.4	9.6
12 FT	25.3	11.5
14 FT	18.6	13.4

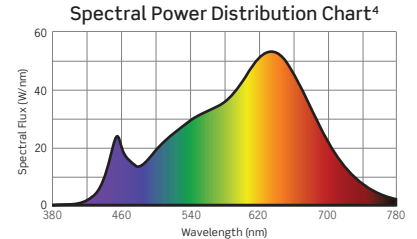



### CTL935WF3XCD: 35W, 3000K, 95 CRI, WIDE FLOOD BEAM

Test No. G25091501

Fixture Delivered Lumens: 2228.46  
 Total Watts@120V: 34.4  
 Lumens Per Watt: 64.78  
 Center Beam Candle Power: 1566  
 Beam Distribution: 79.9°  
 Spacing Criterion: 1.13  
 Color Rendering Index (CRI)<sup>1</sup>: 97.8  
 Color Temperature (CCT)<sup>2</sup>: 2938K  
 Designed for 50,000 Hour Lamp Life<sup>3</sup>

Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIA. (FT.)
4 FT	97.9	6.7
6 FT	43.5	10.1
8 FT	24.5	13.4
10 FT	15.7	16.8
12 FT	10.9	20.1
14 FT	8.0	23.5

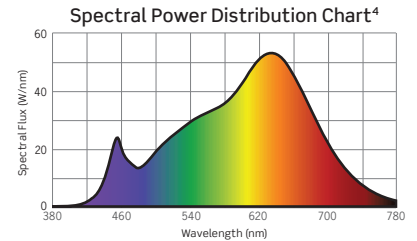

1. Accuracy of Rendering Colors 2. Color Appearance of Light Source 3. Dependent on Surrounding Temperatures 4. Colors Present within the Light Source

### PHOTOMETRIC MULTIPLICATION FACTORS

Lumen output values fluctuate based on Color Temperature (CCT), Color Rendering Index (CRI), and Luminaire Wattage/Output. To estimate lumen output of the various options, multiply the 3000K standard CRI results by the following:

CCT MULTIPLIERS	
CCT	95 CRI
2700K	0.92
3000K	1.00
3500K	1.05
4000K	1.10

OUTPUT MULTIPLIERS			
10W	14W	19W	28W
0.31	0.43	0.60	0.81





**CTL93 SERIES** | Gallery M Track Luminaire Xicato® LED Photometry

**TM-30 DATA: CTL935MF3XCD**

ANSI/IES TM-30-18 Color Rendition Report Test No. S25082701

Colors are for visual orientation purposes only

R <sub>f</sub>	95
R <sub>g</sub>	101
CCT(K)	2938K
D <sub>uv</sub>	-0.0025
u <sup>t</sup>	0.2536
v <sup>t</sup>	0.5192

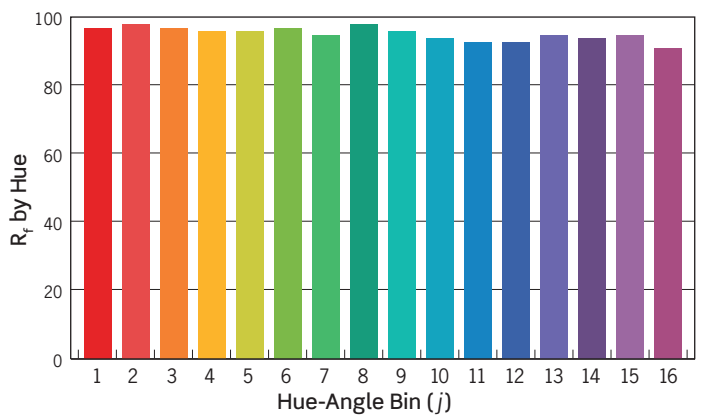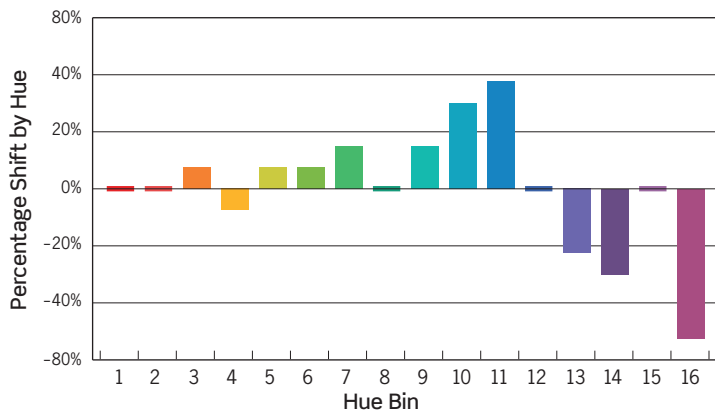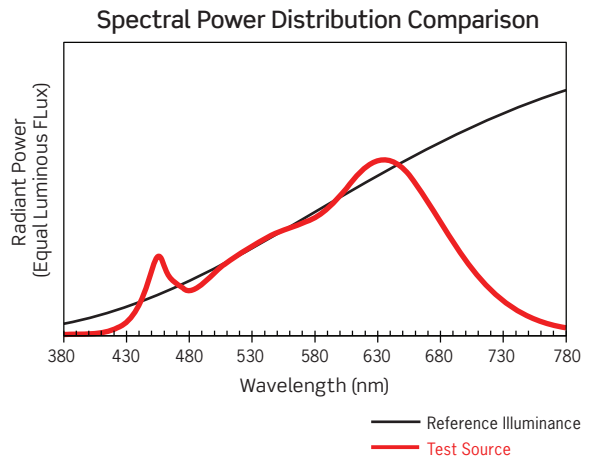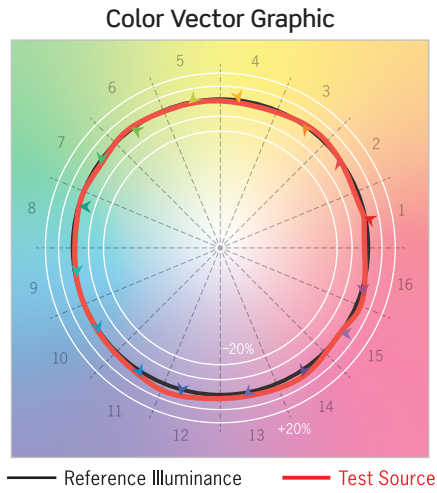

HUE BIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
HUE SHIFT	0%	0%	1%	-1%	1%	1%	2%	0%	2%	4%	5%	0%	-3%	-4%	0%	-7%
R <sub>f</sub> VALUE	97	98	97	96	96	97	95	98	96	94	93	93	95	94	95	91