


DATE

PROJECT

TYPE

## REXAMF SERIES | Recessed or Surface Mount Multi-face Adjustable LED Edge-Lit Exit Sign with Battery Back-up

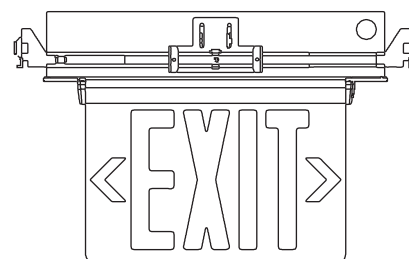

Recessed Ceiling Mount  
Additional Dimensional Drawings, Page 3

	REXA
WATTAGE	3W
MOUNTING	Recessed or Surface: Ceiling, Wall or End Mount Pendant Stem Kit Available
DRIVER INPUT WATTAGE	3W @ 120V
DRIVER INPUT VOLTAGE	120/277 VAC Dual Voltage Operation (50/60Hz, 24mA/11mA)
BATTERY	Nickel-Cadmium Battery (4.8V 300mA) Over 3 Hours Capacity To Emergency Lamps 24-Hour Recharge after 90-Minute Discharge
LISTING	ULus Listed Indoor Use Only; Suitable for Damp Locations Meets UL924 and NFPA101
WARRANTY	One (1) Year Replacement after Date of Purchase
SYSTEM RATING	Expected LED Life of up to 10 Years

DATE

PROJECT

TYPE

# REXAMF SERIES | Recessed or Surface Mount Multi-face Adjustable LED Edge-Lit Exit Sign with Battery Back-up

## ORDERING INFORMATION

Example Order:  –

Model	Faceplate	Lettering	Emergency Battery	Finish
<b>REXA</b>	<b>MF</b> - Multi-Face	<b>G</b> - Green <b>R</b> - Red	<b>EM</b> - Battery Back-up	<b>B</b> - Black <b>P</b> - White

## PENDANT STEM KIT ORDERING INFORMATION

Example Order:    –

Pendant Stem Kit	Length	Stem Kit	Finish
<b>REXA</b>	<b>12IN</b> - 12 In. <b>18IN</b> - 18 In. <b>24IN</b> - 24 In. <b>36IN</b> - 36 In. <b>48IN</b> - 48 In.	<b>STEM KIT</b>	<b>B</b> - Black <b>P</b> - White <b>S</b> - Silver

## PRODUCT DETAILS

### Construction

- Recessed Mount suitable for new construction, lay-in ceilings or where accessibility above the ceiling is available
- Steel Recessed Housing, Aluminum Extrusion and Trim Plate
- Etched Acrylic Faceplate with clear background
- Single or Double Face configuration
- Single Face Panel is Clear Acrylic; Double Face Panel is Clear Acrylic with Mirrored Background
- 6-Inch High letters with 3/4-inch stroke
- Removable Directional Indicators (Chevrons)
- 14-1/2-Inch x 3-1/4-inch ceiling cutout for recessed applications
- Adjustable Bar Hangers for suspended ceiling mount

- Sign maintenance can be done from below the ceiling
- LED Indicator Light and Test Switch
- Low voltage battery disconnection prevents deep discharge damage to the battery

### Performance Summary

- 120/277 VAC Dual voltage operation
- Expected LED life of up to 10 years
- LED Lamps operate in normal (AC input) and emergency (DC input) modes
- ULus listed
- Indoor use only

DATE


PROJECT

TYPE


# REXAMF SERIES | Recessed or Surface Mount Multi-face Adjustable LED Edge-Lit Exit Sign with Battery Back-up

## RECESSED MOUNTING OPTIONS


### Recessed Ceiling Mount

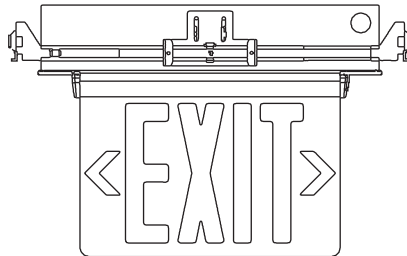

Wall/Ceiling Cutout: 14-15/16" x 3-1/4"  
Faceplate: 15-3/4" x 3-1/2"


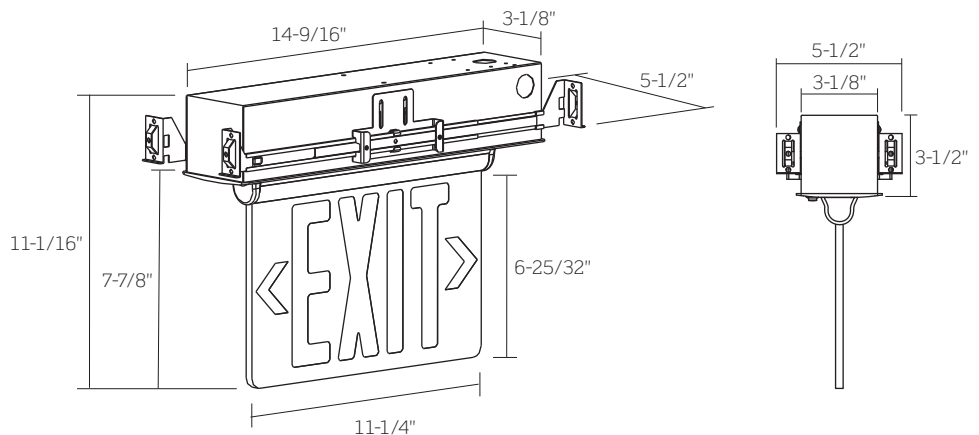


### Recessed Wall Mount


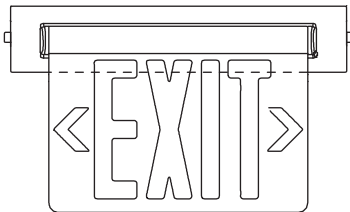


## SURFACE MOUNTING OPTIONS



### Surface Ceiling Mount

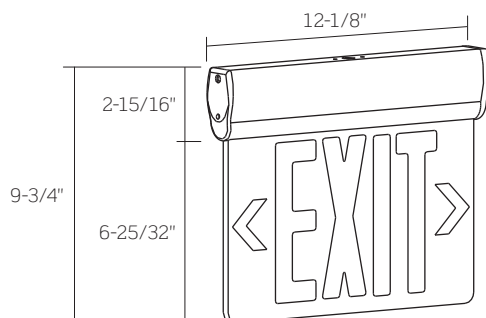

### Surface Wall Mount

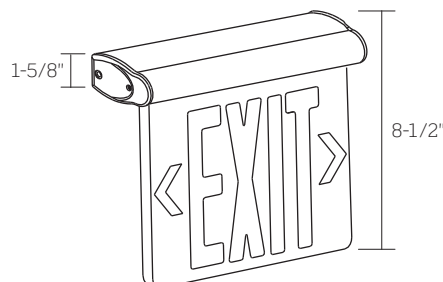

### Surface End Wall Mount

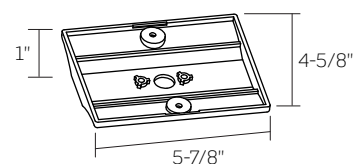

Mounting Canopy