
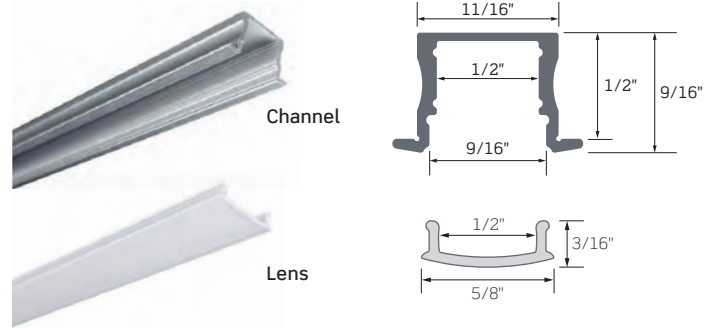



Specflex Architectural Strip Light

AFEX1215R SERIES | Standard Deep Recessed Mounting Channel

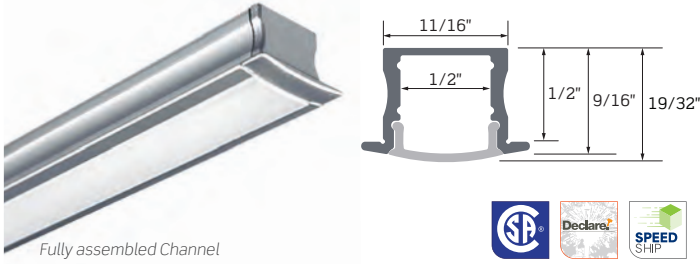

Standard Deep Recessed Mounting Channel:
 a pixel free solution for embedded illumination

- Available in 4- or 6-foot (48- or 72-inch) lengths
- Field cuttable, Anodized Satin Aluminum
- Provides thermal management and heat dissipation for the Strip Light while ensuring a clean, straight run
- Frosted Diffusion Lens softens glare and reduces or removes pixelation while protecting the Strip Light from dust, debris, and moisture, ordered separately
- ABS Grey Plastic End Caps (ordered individually) create a clean finish to the Mounting Channel
- One (1) solid End Cap and one (1) slotted End Cap is recommended; use the End Cap with Slot for Power Feed
- Stainless Steel Mounting Clips available in packs of four (4); 24-inches between Clips is recommended for most applications
- Channels and accessories are Declare Compliant

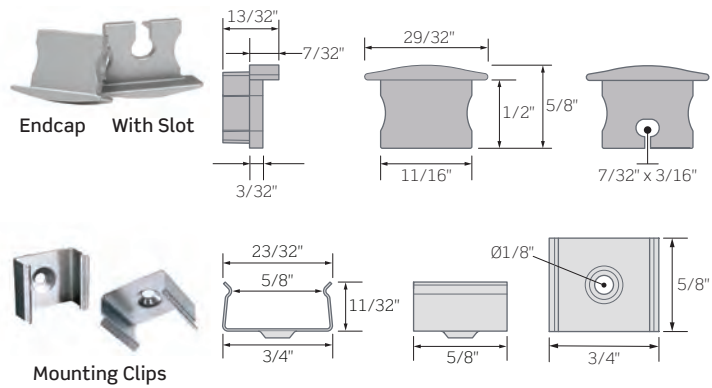

ORDERING INFORMATION

<table border="1"> <tr> <th>Mounting Channel</th> <th>Length</th> <th>Finish</th> </tr> <tr> <td>AFEX1215R Standard Shallow Mounting Channel</td> <td>48 4-Ft. (48-Inches) 72 6-Ft. (72-Inches)</td> <td>S Anodized Satin Aluminum</td> </tr> </table>		Mounting Channel	Length	Finish	AFEX1215R Standard Shallow Mounting Channel	48 4-Ft. (48-Inches) 72 6-Ft. (72-Inches)	S Anodized Satin Aluminum	<p>Example Order: AFEX1215R72-S 72-Inch Mounting Channel AFL1272-FR (1) Frosted Diffusion Lens AFEX1215R-EC (1) Solid End Cap AFEX1215R-ECS (1) End Cap with Slot AFEX1215R-MC4 Set of four (4) Channel Mounting Clips</p>				
Mounting Channel	Length	Finish										
AFEX1215R Standard Shallow Mounting Channel	48 4-Ft. (48-Inches) 72 6-Ft. (72-Inches)	S Anodized Satin Aluminum										
<table border="1"> <tr> <th>Lenses</th> </tr> <tr> <td>AFL1248-FR 4-Ft. (48-In.) Frosted Diffusion Lens</td> </tr> <tr> <td>AFL1272-FR 6-Ft. (72-In.) Frosted Diffusion Lens</td> </tr> </table>	Lenses	AFL1248-FR 4-Ft. (48-In.) Frosted Diffusion Lens	AFL1272-FR 6-Ft. (72-In.) Frosted Diffusion Lens	<table border="1"> <tr> <th>Solid End Cap</th> </tr> <tr> <td>AFEX1215R-EC Solid End Cap, Grey</td> </tr> </table>	Solid End Cap	AFEX1215R-EC Solid End Cap, Grey	<table border="1"> <tr> <th>End Cap with Slot</th> </tr> <tr> <td>AFEX1215R-ECS End Cap with Slot, Grey</td> </tr> </table>	End Cap with Slot	AFEX1215R-ECS End Cap with Slot, Grey	<table border="1"> <tr> <th>Mounting Clips</th> </tr> <tr> <td>AFEX1215R-MC4 Set of four (4) Mounting Clips for Standard Deep Recessed Mounting Channel</td> </tr> </table>	Mounting Clips	AFEX1215R-MC4 Set of four (4) Mounting Clips for Standard Deep Recessed Mounting Channel
Lenses												
AFL1248-FR 4-Ft. (48-In.) Frosted Diffusion Lens												
AFL1272-FR 6-Ft. (72-In.) Frosted Diffusion Lens												
Solid End Cap												
AFEX1215R-EC Solid End Cap, Grey												
End Cap with Slot												
AFEX1215R-ECS End Cap with Slot, Grey												
Mounting Clips												
AFEX1215R-MC4 Set of four (4) Mounting Clips for Standard Deep Recessed Mounting Channel												

COMPATIBLE STRIP LIGHT

Compatible Strip Light details and ordering information can be found starting on Page 2. Mounting Channel is not compatible with Wet Location or TLT Series Strip Lights.


IP20 DRY LOC.	PART NUMBER	DESCRIPTION
	AFSS48	Medium Density Static White
	AFSS48-7H	High Efficacy Static White
	AFSS73	High Density Static White
	AFSSCN	Continuous COB Static White
	AFSS42	Static Mono-Color
	AFSD36-RGB	Dynamic Color RGB
AFSD58	Medium Density RGBW	

Specflex Architectural Strip Light
AFEX1215R SERIES | Standard Deep Recessed Mounting Channel


STRIP LIGHT ORDERING INFORMATION

Ordering information is for Full Reels. Custom Length ordering information can be found on individual Specflex Strip Light specification sheets.

- Full Reels are available in the Max Run Length for each available Wattage for the specific Strip Light
- Each Reel has a 72-inch (6 Ft.) soldered Lead sheathed in a Plenum Rated Cable at the start of the length; additional Plenum Rated Cable available (ordered separately)
- Reels can be cut in the field to desired length at the indicated cut points

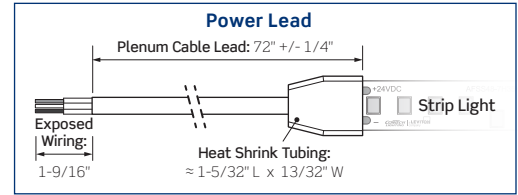

AFSS48 Medium Density Static White, 48 LEDs/Ft. IP20 Dry Location

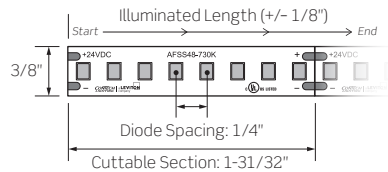


	AFSS48-2	AFSS48-3	AFSS48-5	AFSS48-7
WATTAGE	2W/Ft	3W/Ft	5W/Ft	7W/Ft
LUMEN OUTPUT	247Lm/Ft	364Lm/Ft	580Lm/Ft	777Lm/Ft
CCT/CRI	2700K/3000K/3500K/4000K 95+, R9 >84			

Example Order: AFSS48-535K-R

Wattage/Reel Length	CCT/CRI	Unit
AFSS48-2 2W/Ft 32.8 Ft Reel	95+ CRI	R Full Reel with Power Lead
AFSS48-3 3W/Ft 26.2 Ft Reel	27K 2700K	
AFSS48-5 5W/Ft 21.3 Ft Reel	30K 3000K	
AFSS48-7 7W/Ft 16.4 Ft Reel	35K 3500K 40K 4000K	

AFSS48-7H High Efficacy Static White, 48 LEDs/Ft. IP20 Dry Location

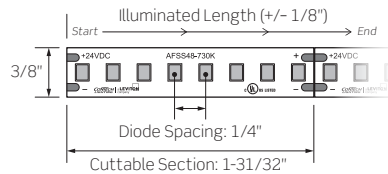


	AFSS48-7H
WATTAGE	7W/Ft
LUMEN OUTPUT	910 Lm/Ft
CCT/CRI	2700K/3000K/3500K/4000K 95+, R9 >84

Example Order: AFSS48-7H35K-R

Wattage/Reel Length	CCT/CRI	Unit
AFSS48-7H 7W/Ft 16.4 Ft Reel	90+ CRI	R Full Reel with Power Lead
	27K 2700K	
	30K 3000K	
	35K 3500K 40K 4000K	

AFSS73 High Density Static White, 73 LEDs/Ft. IP20 Dry Location

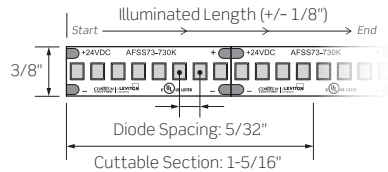

	AFSS73-3	AFSS73-5	AFSS73-7
WATTAGE	3W/Ft	5W/Ft	7W/Ft
LUMEN OUTPUT	123Lm/Ft	119Lm/Ft	117Lm/Ft
CCT/CRI	2700K/3000K/3500K/4000K 95+, R9 >84		

Example Order: AFSS73-535K-R


Wattage/Reel Length	CCT/CRI	Unit
AFSS73-3 3W/Ft 26.2 Ft Reel	95+ CRI	R Full Reel with Power Lead
AFSS73-5 5W/Ft 21.3 Ft Reel	27K 2700K	
AFSS73-7 7W/Ft 16.4 Ft Reel	30K 3000K	
	35K 3500K 40K 4000K	

Specflex Architectural Strip Light
AFEX1215R SERIES | Standard Deep Recessed Mounting Channel

STRIP LIGHT ORDERING INFORMATION, CONTINUED

Ordering information is for Full Reels. Custom Length ordering information can be found on individual Specflex Strip Light specification sheets.


- Full Reels are available in the Max Run Length for each available Wattage for the specific Strip Light
- Each Reel has a 72-inch (6 Ft.) soldered Lead sheathed in a Plenum Rated Cable at the start of the length; additional Plenum Rated Cable available (ordered separately)
- Reels can be cut in the field to desired length at the indicated cut points

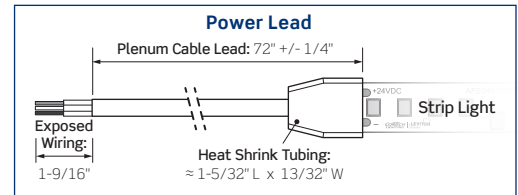

AFSSCN Continuous COB Static White IP20 Dry Location



No Pixelation

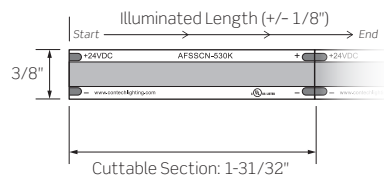

Example Order: AFSSCN-530K-R

	AFSSCN-5
WATTAGE	4.6W/Ft
LUMEN OUTPUT	432 Lm/Ft
CCT/CRI	2100K/2400K/2700K/3000K/3500K/4000K 90+


Wattage/Reel Length	CCT/CRI	Unit
AFSSCN-5 4.6W/Ft 16.4 Ft Reel	90+ CRI 21K 2100K 24K 2400K 27K 2700K 30K 3000K 35K 3500K 40K 4000K	R Full Reel with Power Lead

AFSS42 Static Mono-Color, 48 LEDs/Ft. IP20 Dry Location



Colors appear when strip is illuminated

No Pixelation

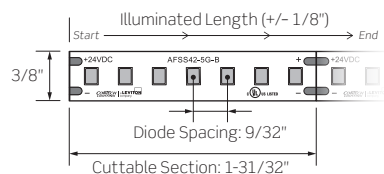

Example Order: AFSS42-5B-R

	AFSS42-5R	AFSS42-5G	AFSS42-5B	AFSS42-5A
WATTAGE	5W/Ft	5W/Ft	5W/Ft	5W/Ft
COLOR	RED	GREEN	BLUE	AMBER
LUMEN OUTPUT	193Lm/Ft	697Lm/Ft	135Lm/Ft	231Lm/Ft
WAVELENGTH	620-625nm	525-535nm	465-470nm	585-590nm


Wattage/Reel Length	Color	Unit
AFSS42-5 5W/Ft 21.3 Ft Reel	R Red G Green B Blue A Amber	R Full Reel with Power Lead

Specflex Architectural Strip Light
AFEX1215R SERIES | Standard Deep Recessed Mounting Channel



STRIP LIGHT ORDERING INFORMATION, CONTINUED

Ordering information is for Full Reels. Custom Length ordering information can be found on individual Specflex Strip Light specification sheets.

- Full Reels are available in the Max Run Length for each available Wattage for the specific Strip Light
- Each Reel has a 72-inch (6 Ft.) soldered Lead sheathed in a Plenum Rated Cable at the start of the length; additional Plenum Rated Cable available (ordered separately)
- Reels can be cut in the field to desired length at the indicated cut points

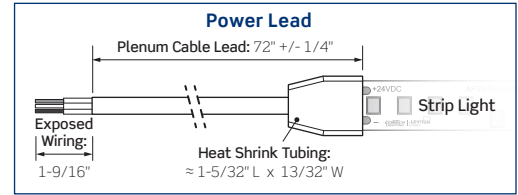

AFSD36-4RGB Dynamic Color RGB, 36 LEDs/Ft. IP20 Dry Location

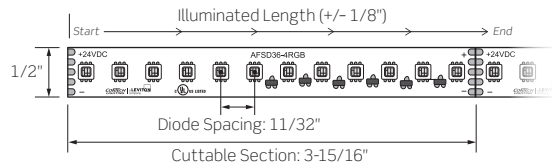


Dynamic color output using individual RGB (Red, Green, and Blue) diodes in each LED

AFSD36-4RGB			
WATTAGE	4.4W/Ft		
LUMEN OUTPUT	179 Lm/Ft		
COLOR	RED	GREEN	BLUE
WAVELENGTH	620-625nm	525-535nm	465-470nm
LUMENS/COLOR	32Lm/Ft	123Lm/Ft	30Lm/Ft

Example Order: AFSD36-4RGB

Wattage/Reel Length	Unit
AFSD36-4RGB 4.4W/Ft 22.6 Ft Reel	R Full Reel with Power Lead

AFSD58-7RGBW Dynamic Color RGBW, 58 LEDs/Ft. IP20 Dry Location

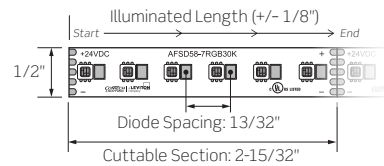


Dynamic color output using individual RGB (Red, Green, and Blue) diodes in each LED plus one (1) White LED in 2700K or 3000K at 95+ CRI

AFSD58-7RGBW				
WATTAGE	7W/Ft			
LUMEN OUTPUT	374 Lm/Ft			
COLOR	WHITE	RED	GREEN	BLUE
WAVELENGTH	N/A	620-625nm	525-535nm	465-470nm
LUMENS/COLOR	176 Lm/Ft	32 Lm/Ft	135 Lm/Ft	35 Lm/Ft

Example Order: AFSD58-7RGBW

Wattage/Reel Length	CCT/CRI	Unit
AFSD58-7RGBW 7W/Ft 16.4 Ft Reel	95+ CRI 27K 2700K 30K 3000K	R Full Reel with Power Lead

CMP Plenum Rated Cable

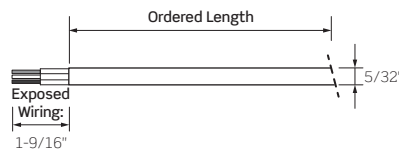

- Bare Copper conductors for excellent conductivity and low voltage drop
- Field cuttable

Example Order: CMP-2C-20

Plenum Rated Cable	Length	Quantity	Length
CMP-2C Two Conductor	10 10-Feet	30	30-Feet
CMP-4C Four Conductor	15 15-Feet	50	50-Feet
CMP-5C Five Conductor	20 20-Feet	100	100-Feet

Specflex Architectural Strip Light
AFEX1215R SERIES | Standard Deep Recessed Mounting Channel

POWER SUPPLY ORDERING INFORMATION

TLP24VHW Series



- Hardwire Constant Voltage Driver
- 120VAC/24VDC
- Includes stripped and tinned wire pigtails on the input and output sides
- 1-Foot Wire Leads
- Class 2 Recognized
- **MUST BE MAINTAINED WITHIN AN ENCLOSURE THAT MEETS LOCAL BUILDING CODES AND NEC (SUPPLIED BY OTHERS)**

Power Supply/Wattage	
TLP24VHW20	20W 120VAC/24VDC 5-3/4" L x 1-1/2" W x 1-1/4" D
TLP24VHW60	60W 120VAC/24VDC 6-1/3" L x 1-3/4" W x 1-1/4" D
TLP24VHW96	96W 120VAC/24VDC 8-3/4" L x 2-2/3" W x 1-1/2" D

L3D0 Series



- Hi-lume Premier 0.1% EcoSystem/3-Wire Constant Voltage 24V Driver with Soft-on, Fade-to-Black
- Class 2 Enclosed 96W Constant Voltage Driver
- Universal 120 – 277VAC Input/24VDC Output
- Dimming down to 0.1% with compatible controls
- Output wattage range up to 96W maximum

Power Supply/Wattage	
L3D0-96W24V-U	96W 120-277VAC 5-1/2" W x 2" H x 10-1/2" L

TLP24VHW MVD Enclosed Series



- 120-277VAC Input/24VDC Output Class 2 Constant Voltage Enclosed Driver Hardwire Power Supply
- Phase and 0-10V Dimming deliver smooth, flicker free linear dimming down to 1% with most LEDs and a wide variety of compatible dimmers
- Dim-to-Off when used with a 0-10V Dimmer
- No minimum load requirement
- Over voltage, over current, over temperature, and short-circuit protection

Power Supply/Wattage	
TLP24VHW60MVD-ENC	60W 8" L x 3-3/8" W x 1-1/4" D
TLP24VHW100MVD-ENC	96W 8-1/4" L x 4-1/8" W x 1-1/2" D

TLP24VHW MV/MVD2 Enclosed Series



- 120 – 277VAC/24VDC Dimming and Non-dimming Hardwire Class 2 Constant Voltage Drivers
- No minimum load requirement
- Enclosure is UL Listed with built-in junction boxes
- 0-10V Dimming driver delivers smooth flicker free linear dimming down to 1% with a wide variety of compatible dimmers
- Auto-reset protection for short circuit and over temperature; over load protection in CC mode

Power Supply/Wattage	
TLP24VHW60MV-ENC	60W Non-Dimming Driver 12-1/8" L x 2-3/8" W x 1-3/8" D
TLP24VHW96MV-ENC	96W Non-Dimming Driver 12-1/8" L x 2-3/8" W x 1-3/8" D
TLP24VHW60MVD2-ENC	60W 0-10V Dimming Driver 12-1/8" L x 2-3/8" W x 1-3/8" D
TLP24VHW96MVD2-ENC	96W 0-10V Dimming Driver 12-1/8" L x 2-3/8" W x 1-3/8" D

TLP24VP Series



- 120VAC Input/24VDC Output Plug-In Power Supply
- Includes AC Wall Plug and Female Power Output Barrel Plug for easy installation
- Barrel connectors do not fit through the ECH or ECS endcaps
- Class 2 listed

Power Supply/Wattage	
TLP24VP36	36W 4-1/4" L x 2" W x 1-3/8" H
TLP24VP60	60W 4-1/2" L x 2" W x 1-3/8" H
TLP24VP96	96W 6-1/8" L x 2-3/8" W x 1-1/2" H


Specflex Architectural Strip Light
AFEX1215R SERIES | Standard Deep Recessed Mounting Channel

CONTROLLER ORDERING INFORMATION

UNIVERSAL CONTROLLERS & ACCESSORIES

DMX-DE3-4M

RGB/RGBW Touch Panel DMX512/eDMX Wall Mount Controller



Controller		Finish
DMX-DE3-4M Touch Panel DMX512/eDMX Wall Mount Controller with Power Adapter 4-3/16" W x 5-3/4" H x 7/16" D		B Black W White

- Mounts to a single- or double-gang electrical box, Power Adapter included
- Touch Control Interface controls color, color mixing, brightness, and speed
- Connects with TLPINT DMX Decoder to control Specflex Strip Lights
- Multi-room Control with 10 Zones, 500 Scenes, 1024 DMX Addresses (two [2] Universes), and Remote Device Management (RDM)
- Windows/Mac Software to set dynamic colors/effects; iOS/Android remote and programming apps
- Black or White Finish
- Indoor use only, not listed for Wet Locations

TLPRTW: 4-Channel Power Repeater



Repeater	
TLPRTW	4-Channel Power Repeater 5-5/16" L x 1-3/4" W x 1-1/8" D

- Enables synchronized PWM signal control of multiple runs from one controller
- Use with Non-dimming Drivers
- Not UL Listed for outdoor use

TLPINT: DMX 512 CV Decoder



Decoder	
TLPINT	DMX 512 CV Decoder 6-3/16" L x 3-1/8" W x 1-5/8" D

- Designed to convert Universal DMX 512 Signal to PWM Signal when used with a DMX 512 Console
- Use with Non-Dimming Strip Light Power Supplies/Drivers
- Not UL listed for outdoor use

TLPRGBRF: Dimming Controller with RF Remote Control



Controller	
TLPRGBRF	Dimming Controller with RF Remote 8-3/8" L x 1-5/8" W x 1-3/16" D

- Pre-programmed functions including Color Strobe, 3-Channel Color Change, and Gradual Brightness Change
- Includes two (2) programmable presets
- Use with Non-dimming Drivers
- Not UL Listed for outdoor use

RGB/RGBW CONTROLLERS

TLP-UB4: Touch Panel DMX/Bluetooth Wall Mount Controller



Controller	
TLP-UB4	RGB/RGBW Touch Panel DMX and Bluetooth Programmable Wall Mount Controller 5-5/16" L x 1-3/4" W x 1-1/8" D

- DMX512 Wall mounted Controller mounts to a single-gang electrical box
- Touch Control Interface to control color mixing, brightness, and more
- Connects with DMX Decoder (TLPINT Series) to control Specflex RGB and RGBW Strip Lights
- Four (4) Zones, Four (4) scenes, and 16 pre-programmed modes
- iOS and Android Compatible control app
- Indoor use only, not listed for Wet Locations

TLPRGBWRF: 28-Key Remote Controller



Controller	
TLPRGBWRF	28-Key Remote Controller 6-7/8" L x 1-3/4" W x 1-3/16" D

- Eight (8) Key RF Remote for color, speed, and brightness control
- Seven (7) programmable scenes
- 20 AMP Max.

TLPRGBWTC: Dial Touch Controller



Controller	
TLPRGBWTC	Touch Controller 6-7/8" L x 1-3/4" W x 1-3/16" D

- Color is selected using the color wheel; plus speed and brightness control
- Pre-selected modes: eight (8) Static Color presets, four (4) Dynamic Color presets
- 20 AMP Max.